

CONTENTS

04

NEW
PRODUCTS



30

EARTH
RESISTANCE
TESTERS



35

INSULATION
TESTERS



42

MULTIMETERS



85

CLAMP
METERS



110

CIRCUIT
TESTERS



114

ELECTRICAL
TESTERS



119

WIRE
& CABLES



124

CIRCUIT
ANALYZER



128

LCR METERS



132

PROCESS
CALIBRATORS



136

INFRARED
THERMOMETERS



142

THERMOMETERS



148

LIGHT
METERS



150

TACHOMETERS &
ANEMOMETERS



152

DISTANCE
METER



153

MOISTURE
TESTER



154

SOUND
LEVEL
METERS




156

OTHER
TESTING
INSTRUMENT



162

ACCESORIES



WIRELESS SERIES



Wireless Made Simple

The Wireless device combines the precision, convenience, and safety measurement into technology that enables faster data decision logging and provides worker with safety environment by using the device.

SMART SERIES



Smart Connecting People

Smart Device is the new generation of technology that assists the user to solve problems and troubleshoot without functions determination and to reduce suspicion while operating. Smart function helps to define the measuring object automatically and gets the job done efficiently.

INDUSTRIAL APPLICATION



Your Vision, Our Future

Mastech introduces the industry's most advanced, capable and comprehensive Thermal imaging, clamp meters and Insulation products, these advanced products are to designed to meet every requirement for testing and maintaining electrical systems, industrial, commercial field.

SAFETY INSTRUMENTS



Never Give Safety a Day off

Never ignore the electric safety caution that surrounding your household or industrial field.

PRODUCTS INDEX

Model #	Product	Page #	Model #	Product	Page #
MS8238H	Digital Multimeter + Wireless	42	MS2225A	Single Phase Power Clamp Meter	87
MS8361D	Multimeter + Wireless	43	MS8922B	Voltage Tester + RCD	118
MS8301D	Smart Multimeter + NCV	44	MS8911	Smart SMD Tester	129
MS8333A	Portable Multimeter	45	MS6561	Imaging IR Thermometer	136
MS8239D	Automotive Multimeter	57	MS6612D	Digital Lux Meter + Wireless	149
MS5206	Digital Insulation Multimeter	78	MS6252D	Digital Anemometer + Wireless	151
MS2033A	Smart Clamp Meter	85	MS5911	Safety PAT Plus	159
MS2016A	Leakage Clamp Meter	86			

EARTH RESISTANCE TESTERS

CAT II CAT III CAT IV						
Page	30	31	32	32	32	34
Model	MS2301	MS2302	MS2306	MS2307	MS2308	MS5209
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	
Safety Rating	CAT III 150V	CAT III 300V				
Resistance	0.01Ω~1200Ω	0.01Ω~4000Ω	0.02Ω~20kΩ	0.02Ω~30kΩ	0.02Ω~300kΩ	1Ω~1000Ω
Measurement Voltage		AC 200V	AC 20V/48V DC 20V	AC 20V/48V DC 20V	AC 20V/48V DC 20V	AC 30V
sensing & inducing current transformer				•	•	
Back light		•	•	•	•	
Interface				USB	USB	

INSULATION TESTERS

CAT II CAT III CAT IV							
Page	40	35	36	36	37	37	38
Model	MS5201	MS5202	MS5203	MS5203A	MS5205	MS5205B	MS5215
Certificate			CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V
Insulation Resistance	0.01MΩ~2GΩ	0.01MΩ~100GΩ	0.01MΩ~10GΩ	0.01MΩ~10GΩ	0.01MΩ~100GΩ	0.01MΩ~300GΩ	0.01MΩ~5TΩ
Output Voltage	1kV DC	2.5kV DC	1kV DC	1kV DC	2.5kV DC	2.5kV DC	5kV DC
Leakage Current test							1nA~3mA
Continuity Test			0.01Ω~200Ω (1mA)	0.01Ω~200Ω (>200mA)	0.01Ω~200Ω (1mA)	0.01Ω~200Ω (1mA)	
Measurement Voltage	DC 1000V AC 700V		DC 1000V AC 750V	DC 1000V AC 750V	DC 1000V AC 750V	DC 1000V AC 750V	DC 1000V AC 750V
Short Current	1.8mA		1.8mA	1.8mA	3mA	3mA	3mA
Temperature Test							-10~70°C
Back Light			•	•	•	•	•
Interface							USB

DIGITAL MULTIMETERS

CAT II CAT III CAT IV						NEW 				
Page	46	46	46	46	47	45	48	48	48	48
Model	M300	M300C	M320	M320C	MS8216	MS8333A	MS8211	MS8211D	MS8212A	MS8223A
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL		CE/ETL			CE/ETL	CE/ETL
Safety Rating	CAT II 600V CAT III 300V	CAT III 300V	CAT II 600V CAT III 300V	CAT III 300V	CAT II 600V CAT III 300V	CAT III 600V	CAT II 600V	CAT II 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	4000	4000	4000	6000	2000	2000	2000	2000
Autoranging			•	•	•	•	•	•	•	•
Auto Power Off			•	•	•	•	•	•	•	•
True RMS						•				
DC Voltage	600V	300V	600V	300V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	300V	600V	300V	600V	600V	600V	600V	600V	600V
DC Current	200mA	200mA	400mA	400mA		600mA		200mA	200mA	200mA
AC Current			400mA	400mA		600mA		200mA	200mA	200mA
Resistance	2MΩ	2MΩ	40MΩ	40MΩ	40MΩ	60MΩ	20MΩ	20MΩ	20MΩ	20MΩ
Capacitance			100μF	100μF	200μF	600μF				
Frequency			100kHz	100kHz	200kHz	10kHz				
Duty Cycle						•				
Type K Temperature										
Battery Test						•				
Diode	•	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•	•
Display Backlight						•				
Work Light										•
Data Hold			•	•	•	•	•	•	•	•
NCV						•	•		•	•
Inductance										
hFE Transistor										
Dual Display										
MAX							•	•	•	•
MAX/MIN										
MAX/MIN/AVG										
Relative Measurement					•					
Peak Measurement										
DWELL Test										
TACH Test										
Logic Level Test								•	•	•
Retractable Tip							•	•		
Double Molding									•	•

CAT II CAT III CAT IV									
Page	49	50	50	50	50	50	50	51	51
Model	MS8217	MAS830	MAS830B	MAS830L	MAS830C	MAS830BC	MAS830LC	MAS838	MAS838C
Certificate		CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT II 1000V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 300V	CAT III 300V	CAT III 300V	CAT III 600V	CAT III 300V
	CAT III 600V								
Display Counts	4000	2000	2000	2000	2000	2000	2000	2000	2000
Autoranging	•								
Auto Power Off	•								
True RMS									
DC Voltage	1000V	600V	600V	600V	300V	300V	300V	600V	300V
AC Voltage	1000V	600V	600V	600V	300V	300V	300V	600V	300V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A
AC Current	10A								
Resistance	40MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ	2MΩ
Capacitance	100μF								
Frequency	100kHz								
Duty Cycle	•								
Type K Temperature	-55~1000°C							-20~1000°C	-20~1000°C
Battery Test									
Diode	•	•	•	•	•	•	•	•	•
Continuity	•	•		•	•		•	•	•
Display Backlight				•			•		
Work Light									
Data Hold	•	•	•	•	•	•	•	•	•
NCV									
Inductance									
hFE Transistor									
Dual Display									
MAX									
MAX/MIN									
MAX/MIN/AVG									
Relative Measurement	•								

CAT II CAT III CAT IV											
Page	52	52	52	53	53	53	54	54	54	55	54
Model	MS8233A	MS8233B	MS8233C	MS8233D	MS8233E	MS8233Z	MS8238	MS8238A	MS8238B	MS8238C	MS8238G
Certificate	CE/ETL	CE/ETL	CE/ETL		CE/ETL		CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT II 600V	CAT III 600V	CAT II 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	2000	2000	2000	4000	2000	2000	2000	2000	2000
Autoranging				•	•	•				•	
Auto Power Off				•	•	•				•	
True RMS											
DC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A	10A	10A
AC Current				10A	10A	10A		10A	10A	10A	
Resistance	2MΩ	2MΩ	2MΩ	20MΩ	20MΩ	40MΩ	2MΩ	2MΩ	2MΩ	20MΩ	2MΩ
Capacitance						200μF					
Frequency				20kHz		10MHz					
Duty Cycle						•					
Type K Temperature			-20~1000°C -4~1832°F		-20~1000°C -4~1832°F	-20~1000°C -4~1832°F				-20~750°C -4~1382°F	
Battery Test							•	•	•	•	•
Diode	•	•	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•	•	•
Display Backlight		•	•	•	•	•					
Work Light											
Data Hold	•	•	•	•	•	•	•	•	•	•	•
NCV		•	•	•	•			•	•	•	•
Inductance											
hFE Transistor											
Dual Display											
MAX				•	•	•					
MAX/MIN											
MAX/MIN/AVG											
Relative Measurement											

CAT II CAT III CAT IV						NEW 			
Page	42	56	56	56	57	44	58	58	58
Model	MS8238H	MS8239A	MS8239B	MS8239C	MS8239D	MS8301D	MS8321A	MS8321B	MS8321C
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	4000	2000	2000	4000	2000	6000	2000	2000	2000
Autoranging	•			•	•	•			
Auto Power Off	•			•	•	•	•	•	•
True RMS	•								
DC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A		10A	10A	10A
AC Current	10A		10A	10A	10A		10A	10A	
Resistance	40MΩ	2MΩ	2MΩ	40MΩ	20MΩ	10MΩ	20MΩ	20MΩ	2MΩ
Capacitance				100μF					
Frequency				10MHz		3kHz			
Duty Cycle				•		•			
Type K Temperature	-20~1000°C -4~1832°F			-20~1000°C -4~1832°F				-20~1000°C -4~1832°F	
Battery Test	•	•	•					•	
Diode	•	•	•	•	•		•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight				•	•	•			
Work Light									
Data Hold	•	•	•	•	•	•	•	•	•
NCV	•					•			
Inductance									
hFE Transistor							•		•
Dual Display						•			
MAX					•				
MAX/MIN						•			
MAX/MIN/AVG									
Relative Measurement									
Peak Measurement									
DWELL Test					•				
TACH Test					•				
Interface	Wireless								

CAT II CAT III CAT IV									
Page	59	59	59	61	61	61	61	61	60
Model	MS8321D	MS8321E	MS8321F	MY60	MY61	MY62	MY63	MY64	MY65
Certificate									
Safety Rating	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V
	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	2000	2000	2000	2000	2000	2000	20000
Autoranging									
Auto Power Off	•	•	•	•	•	•	•	•	•
True RMS									
DC Voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V
AC Voltage	750V	750V	750V	750V	750V	750V	750V	750V	750V
DC Current	20A	20A	20A	10A	10A	10A	10A	10A	10A
AC Current	20A	20A		10A	10A	10A	10A	10A	10A
Resistance	20MΩ	20MΩ	2MΩ	200MΩ	200MΩ	200MΩ	200MΩ	200MΩ	200MΩ
Capacitance					100μF	100μF	100μF	100μF	100μF
Frequency							20kHz		20kHz
Duty Cycle									
Type K Temperature		-20~1000°C -4~1832°F				-20~1000°C		-20~1000°C	
Battery Test		•							
Diode	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight									
Work Light									
Data Hold	•	•	•	•	•	•	•	•	•
NCV									
Inductance									
hFE Transistor	•		•	•	•	•	•	•	•
Dual Display									
MAX									
MAX/MIN									
MAX/MIN/AVG									
Relative Measurement									
Peak Measurement									
DWELL Test									
TACH Test									
Interface									

CAT II CAT III CAT IV									
Page	62	62	62	63	63	64	64	65	65
Model	MY70	MY74	MY74B	MY75	MY78	MS8360C	MS8360E	MS8360F	MS8360G
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	2000	20000	4000	2000	2000	4000	4000
Autoranging					•			•	•
Auto Power Off	•	•	•	•	•	•	•	•	•
True RMS									
DC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A
AC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A
Resistance	200MΩ	200MΩ	200MΩ	200MΩ	40MΩ	200MΩ	200MΩ	40MΩ	40MΩ
Capacitance		100μF	100μF	100μF	200μF	200μF	200μF	200μF	400μF
Frequency		20kHz	20kHz	20kHz	200kHz	20kHz		10MHz	10MHz
Duty Cycle					•			•	•
Type K Temperature		-20~1000°C	-20~1000°C			-20~1000°C -4~1832°F			-20~1000°C -4~1832°F
Battery Test									
Diode	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight						•	•	•	•
Work Light									
Data Hold	•	•	•	•	•	•	•	•	•
NCV						•	•	•	•
Inductance							20H		
hFE Transistor	•	•	•		•				
Dual Display									
MAX									
MAX/MIN									•
MAX/MIN/AVG									
Relative Measurement					•			•	•
Low Impedance									
Bar Graph									•
DC Current (For Clamp)					40/400A				
AC Current (For Clamp)					40/400A				
Interface									

CAT II CAT III CAT IV									
Page	NEW 43	66	66	66	68	68	68	70	70
Model	MS8361D	MS8250A	MS8250B	MS8250D	MS8251A	MS8251B	MS8251C	MS8253A	MS8253D
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT IV 600V	CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V	CAT III 1000V CAT IV 600V
Display Counts	4000	4000	4000	6600	6600	6600	4000	6600	6600
Autoranging	•	•	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•	•	•
True RMS	•			•		•	•	•	•
DC Voltage	600V	600V	600V	1000V	1000V	1000V	1000V	1000V	1000V
AC Voltage	600V	600V	600V	1000V	1000V	1000V	1000V	1000V	1000V
DC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A
AC Current	10A	10A	10A	10A	10A	10A	10A	10A	10A
Resistance	40MΩ	40MΩ	40MΩ	66MΩ	66MΩ	66MΩ	40MΩ	66MΩ	66MΩ
Capacitance	100mF	100μF	100μF	66mF	66mF	66mF	40mF	66mF	66mF
Frequency	10MHz	5MHz	5MHz	66MHz	66MHz	66MHz	40MHz	66MHz	66MHz
Duty Cycle	•	•	•	•	•	•	•	•	•
Type K Temperature					0~1000°C 32~1832°F	0~1000°C 32~1832°F	0~1000°C 32~1832°F		
Battery Test									
Diode	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•	•	•	•
Work Light									
Data Hold	•	•	•	•	•	•	•	•	•
NCV	•	•	•	•	•	•	•	•	•
Inductance									
hFE Transistor	•								
Dual Display				•	•	•	•	•	•
MAX									
MAX/MIN				•	•	•	•	•	•
MAX/MIN/AVG									
Relative Measurement	•	•	•	•	•	•	•	•	•
Low Impedance						•			
Bar Graph				•	•	•	•	•	•
DC Current (For Clamp)									
AC Current (For Clamp)									
Interface	Wireless		USB	USB					USB

CAT II CAT III CAT IV							
Page	72	72	72	72	72	74	74
Model	MS8261	MS8264	MS8265	MS8268	MS8269	MS8340A	MS8340B
Certificate						CE/ETL	CE/ETL
Safety Rating	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT III 1000V	CAT III 1000V
	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V		
Display Counts	2000	2000	20000	4000	2000	6000	22000
Autoranging				•		•	•
Auto Power Off	•	•	•	•	•	•	•
True RMS							•
DC Voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V
AC Voltage	750V	750V	750V	750V	750V	750V	700V
DC Current	10A	10A	10A	10A	10A	10A	10A
AC Current	10A	10A	10A	10A	10A	10A	10A
Resistance	200MΩ	200MΩ	200MΩ	40MΩ	20MΩ	60MΩ	220MΩ
Capacitance	20μF	20μF	200μF	200μF	200μF	400μF	220mF
Frequency		20kHz	20kHz	200kHz		10MHz	220kHz
Duty Cycle				•		•	•
Type K Temperature		-20~1000°C			-20~1000°C	-10~700°C 14~1292°F	
Diode	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•
Display Backlight	•	•	•	•		•	•
Work Light							
Data Hold	•	•	•	•	•	•	•
NCV							
Inductance					20H		
hFE Transistor	•	•	•	•	•		
MAX							
MAX/MIN						•	•
MAX/MIN/AVG							
Relative Measurement				•		•	•
Peak Measurement							•
Low Pass Filter						•	
Insulation Test							
DAR / PI							
Relative Humidity							
Sound level							
Luminosity							
Infrared Temperature							
Environment Temperature							
Cable Check				•	•		
Sound & Light Warning							
Data Logging							
Interface							USB

CAT II CAT III CAT IV						NEW 	
Page	75	76	77	71	71	78	79
Model	MS8209	MS8228	MS8229	MS8235	MS8236	MS5206	MS5208
Certificate			CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT II 1000V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 1000V	CAT III 1000V
		CAT III 600V					CAT IV 600V
Display Counts	4000	4000	4000	2000	2000	6600	6600
Autoranging	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•
True RMS						•	•
DC Voltage	600V	1000V	1000V	600V	600V	1000V	1000V
AC Voltage	600V	750V	750V	600V	600V	660V	750V
DC Current	10A	10A	10A	10A	10A		400mA
AC Current	10A	10A	10A	10A	10A		400mA
Resistance	40MΩ	40MΩ	40MΩ	20MΩ	20MΩ	200kΩ	60MΩ
Capacitance	200μF	100μF	100μF				60mF
Frequency	200kHz	200kHz	200kHz	20kHz			10kHz
Duty Cycle	•	•					
Type K Temperature	-20~1000°C		-20~1000°C -4~1832°F				-30~1300°C -22~2372°F
Diode	•	•	•	•	•		•
Continuity	•	•	•	•	•		•
Display Backlight	•	•	•	•	•	•	•
Work Light							
Data Hold	•	•	•	•	•		•
NCV				•	•		
Inductance							
hFE Transistor		•					
MAX				•	•		
MAX/MIN						•	
MAX/MIN/AVG							•
Relative Measurement	•	•					•
Peak Measurement							
Low Pass Filter							•
Insulation Test						1000V/10GΩ	1000V/2GΩ
DAR / PI						•	•
Relative Humidity	30~90%		20~95%				
Sound level	35~100dB		40~100dB				
Luminosity	40000Lux		4000/40000Lux				
Infrared Temperature		-20~300°C -4~572°F					
Environment Temperature		0~40°C 32~104°F	0~40°C 32~104°F				
Cable Check				RJ11/RJ45	RJ11/RJ45/Tone		
Sound & Light Warning		•	•				
Data Logging							100 Groups
Interface						Wireless	

CAT II CAT III CAT IV				
Page	80	81	82	83
Model	MS6100	M9803R	MS8040	MS8050
Certificate			CE/ETL	
Safety Rating		CAT II 1000V	CAT II 1000V	CAT II 1000V
Display Counts	22000	4000	22000	53000
Autoranging	•	•	•	•
Auto Power Off		•	•	•
True RMS		•	•	•
DC Voltage		1000V	1000V	1000V
AC Voltage		750V	750V	1000V
DC Current		10A	10A	10A
AC Current		10A	10A	10A
Resistance		40MΩ	200MΩ	50MHz
Capacitance		40μF	200mF	5mF
Frequency	1300MHz	600kHz		
Logic Frequency			220MHz	2MHz
Linear Frequency			100kHz	200kHz
Duty Cycle			•	•
OSC. Out	10MHz			
Type K Temperature			-30~1300°C	
Diode		•	•	•
hFE Transistor		•		
Continuity		•	•	•
Backlight		•	•	•
Data Hold	•		•	•
MAX/MIN/AVG		MAX/MIN	MAX/MIN	•
Relative Measurement	•	•	•	•
Peak Measurement			•	
Low Pass Filter	•		•	
Bar Graph		•	•	
DC Current (For Clamp)			220/2200A	
AC Current (For Clamp)			220/2200A	
ADP measurement		•		
Data Logging				30 Groups
Analysis Software				•
Interface		USB	USB	USB

CAT II CAT III CAT IV								
Page	88	88	88	89	89	90	90	90
Model	M266	M266C	M266F	MS2000G	MS2000R	MS2001	MS2001C	MS2101
Certificate	CE/ETL		CE/ETL					
Safety Rating	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V	CAT II 1000V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V CAT III 600V
Display Counts	2000	2000	2000	2000	4000	2000	2000	4000
Jaw Size	Φ50mm 2.0"	Φ50mm 2.0"	Φ50mm 2.0"	Φ55mm 2.2"	Φ55mm 2.2"	Φ42mm 1.7"	Φ42mm 1.7"	Φ42mm 1.7"
Autoranging					•			•
Auto Power Off					•			•
True RMS					•			
DC Voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V
AC Voltage	750V	750V	750V	750V	750V	750V	750V	750V
DC Current					1000A			1000A
AC Current	1000A	1000A	1000A	2000A	1000A	1000A	1000A	1000A
Inrush Current								
Resistance	20kΩ	2MΩ	2MΩ	2MΩ	40MΩ	2kΩ	2kΩ	40MΩ
Capacitance								40μF
Frequency			2kHz	20kHz	400kHz			100kHz
Duty Cycle								•
Type K Temperature		0~750°C 32~1382°F		0~750°C			-40~750°C	-40~750°C
Diode			•	•		•		•
Continuity	•	•	•	•	•	•	•	•
Display Backlight				•	•	•	•	
Work Light								
Data Hold	•	•	•	•	•	•	•	•
NCV								
MAX/MIN					•			
Relative Measurement					•			•
Bar Graph								
Insulation Test	2000MΩ	2000MΩ	2000MΩ					

CAT II CAT III CAT IV				NEW 					
Page	91	91	91	85	92	92	93	93	93
Model	MS2030	MS2030A	MS2030B	MS2033A	MS2028A	MS2028B	MS2108T	MS2128	MS2128A
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	2000	4000	6000	2000	4000	6600	6600	4000
Jaw Size	Φ28mm 1.1"	Φ28mm 1.1"	Φ28mm 1.1"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"
Autoranging			•	•	•	•	•	•	•
Auto Power Off			•	•	•	•	•	•	•
True RMS					•		•	•	
DC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
AC Voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V
DC Current							600A	600A	600A
AC Current	400A	200A	600A	600A	600A	600A	600A	600A	600A
Inrush Current							600A	600A	
Resistance	2kΩ	2kΩ	40MΩ	10MΩ	20MΩ	40MΩ	66MΩ	66MΩ	40MΩ
Capacitance			100μF			100mF	100mF	66mF	4mF
Frequency			10kHz	3kHz		100kHz	10kHz	10kHz	10kHz
Duty Cycle			•	•		•	•	•	•
Type K Temperature			-20~1000°C -4~1832°F			-20~750°C -4~1382°F			
Diode	•	•	•		•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight		•	•	•	•	•	•	•	•
Work Light		•	•				•	•	•
Data Hold	•	•	•	•	•	•	•	•	•
NCV		•	•						
MAX/MIN				•	Max		•	•	•
Relative Measurement									•
Bar Graph									•
Insulation Test									
DC Current (From Plug)									
Low Pass Filter									
Low Impedance									
Dual Display				•					
Infrared Temperature									
Interface									

CAT II CAT III CAT IV									
Page	94	94	95	96	97	97	98	98	98
Model	MS2009A	MS2009C	MS2109A	MS2160	MS2600	MS2601	MS2140A	MS2140B	MS2140C
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL		CE/ETL			
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Display Counts	2000	6000	6000	4000	4000	6000	6000	6000	6000
Jaw Size	Φ26mm 1.0"	Φ26mm 1.0"	Φ26mm 1.0"	Φ24mm 0.9"	Φ12mm 0.5"	Φ12mm 0.5"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"
Autoranging	•	•	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•	•	•
True RMS									
DC Voltage	600V	600V	600V	600V	1000V	600V	1000V	1000V	1000V
AC Voltage	600V	600V	600V	600V	700V	600V	1000V	1000V	1000V
DC Current			600A	80A			600A	1000A	1000A
AC Current	600A	600A	600A	80A	200A	200A	600A	1000A	1000A
Inrush Current							600A	1000A	1000A
Resistance	20MΩ	60MΩ	60MΩ	40MΩ	40MΩ	60MΩ	60MΩ	60MΩ	60MΩ
Capacitance		60mF	4mF	40mF	40μF	60mF	60mF	60mF	60mF
Frequency		10MHz	10MHz	10MHz	100kHz	60MHz	60MHz	60MHz	60MHz
Duty Cycle		•	•	•	•	•	•	•	•
Type K Temperature		-20~1000°C -4~1832°F	-20~1000°C -4~1832°F	-20~1000°C -4~1832°F		-20~400°C -4~750°F	-40~500°C -40~932°F	-40~500°C -40~932°F	-40~500°C -40~932°F
Diode	•	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•	•	•	•
Work Light	•	•	•	•		•	•	•	•
Data Hold	•	•	•	•	•	•	•	•	•
NCV	•	•	•	•		•	•	•	•
MAX/MIN	Max		•				•	•	•
Relative Measurement			•		•		•	•	•
Bar Graph									
Insulation Test									
DC Current (From Plug)						1000μA	2000μA	2000μA	2000μA
Low Pass Filter									
Low Impedance						•			
Dual Display									
Infrared Temperature									-20~350°C -32~662°F
Interface									

CAT II CAT III CAT IV								
Page	100	100	101	101	102	102	103	103
Model	MS2025A	MS2025C	MS2125A	MS2125B	MS2026	MS2026R	MS2138	MS2138R
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL				
Safety Rating	CAT III 1000V	CAT III 1000V	CAT III 1000V	CAT III 1000V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
	CAT IV 600V	CAT IV 600V	CAT IV 600V	CAT IV 600V				
Display Counts	6000	6600	6000	6000	6000	6000	4000	4000
Jaw Size	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"	Φ40mm 1.6"
Autoranging	•	•	•	•	•	•	•	•
Auto Power Off	•	•	•	•	•	•	•	•
True RMS	•	•	•	•		•		•
DC Voltage	1000V	1000V	1000V	1000V	1000V	1000V	600V	600V
AC Voltage	750V	750V	750V	750V	750V	750V	600V	600V
DC Current			1000A	1000A			1000A	1000A
AC Current	1000A	1000A	1000A	1000A	1000A	1000A	1000A	1000A
Inrush Current			1000A	1000A				
Resistance	60MΩ	66MΩ	60MΩ	60MΩ	60MΩ	60MΩ	40MΩ	40MΩ
Capacitance	100mF	66mF	100mF	100mF	4mF	4mF	4mF	4mF
Frequency	10MHz	66MHz	10MHz	10MHz	10MHz	10MHz	10MHz	10MHz
Duty Cycle	•	•	•	•	•	•	•	•
Type K Temperature		-20~1000°C -4~1832°F						
Diode	•	•	•	•	•	•	•	•
Continuity	•	•	•	•	•	•	•	•
Display Backlight	•	•	•	•	•	•	•	•
Work Light	•	•	•	•	•	•	•	•
Data Hold	•	•	•	•	•	•	•	•
NCV	•	•	•	•				
MAX/MIN	•	•	•	•	•	•		
Relative Measurement	•	•	•	•		•	•	•
Bar Graph		•		•			•	•
Low Pass Filter								
Dual Display		•		•				
Active Power								
Apparent Power								
Reactive Power								
Power Factor								
Active Energy								
Harmonic Measurement								
Data Logging								
Interface				USB				

CAT II CAT III CAT IV				NEW 				NEW 		
Page	104	104	105	86	106	107	107	87	108	108
Model	MS2010A	MS2010B	MS2006B	MS2016A	MS2228	MS2203	MS2205	MS2225A	MS3300	MS3302
Certificate				CE/ETL				CE/ETL		
Safety Rating	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 1000V	CAT II 600V	CAT II 600V
Display Counts	2000	4000	2000	4000	6000	9999	6000	6000		
Jaw Size	Φ32mm 1.2"	Φ32mm 1.2"	Φ31mm 1.2"	Φ30mm 1.2"	Φ26mm 1.0"	Φ50mm 2.0"	Φ50mm 2.0"	Φ40mm 1.6"	Φ55mm 2.2"	Φ28mm 1.1"
Autoranging	•	•		•	•	•	•	•		
Auto Power Off	•	•	•	•	•		•	•		
True RMS				•	•	•	•	•	•	
DC Voltage	600V	600V		600V				1000V		
AC Voltage	600V	600V		600V	600V	600V	600V	750V		
DC Current									1000A	
AC Current	600A	600A	60A	150A	200A	1000A	1000A	1000A	1000A	400A
Inrush Current								1000A		
Resistance	20MΩ	40MΩ		40MΩ				60MΩ		
Capacitance		100μF		40mF				100mF		
Frequency		100kHz			1kHz	1kHz	1kHz	10MHz		
Duty Cycle		•						•		
Type K Temperature	20~1000°C -4~1832°F	-20~1000°C		20~1000°C -4~1832°F						
Diode	•	•		•				•		
Continuity	•	•		•				•		
Display Backlight	•	•			•	•	•	•		
Work Light					•			•		
Data Hold	•	•	•	•	•	•	•	•		
NCV								•		
MAX/MIN	Max			•	•	•		•		
Relative Measurement		•						•		
Bar Graph						•				
Low Pass Filter	•	•		•						
Dual Display										
Active Power					120kW	600kW	600kW	750kW		
Apparent Power					120kVA	600kVA	600kVA	750kVA		
Reactive Power					120kVAr	600kVAr	600kVAr	750kVAr		
Power Factor					0.3~1	0.3~1	0.3~1	0.3~1		
Active Energy						9999kWh				
Harmonic Measurement					45~65Hz		45~65Hz	45~65Hz		
Data Logging						28 Groups	100 Groups			
Interface						RS232	RS232	Wireless		

CIRCUIT TESTERS

CAT II CAT III CAT IV					
	110	111	111	112	113
	MS6860	MS102	MS112	MS5902	MS5905
	CE	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT II 230V	CAT II 125V	CAT II 125V	CAT II 600V	CAT II 600V
AC Volatge	110V 220V 230V	125V	125V	110V 120V 220V 230V	125V 220V 230V
Socket Test	•	•	•	•	•
GFCI		•		TF type	TB type
RCD					
Work Light				•	
NCV					•
Buzzer and LED Instruction	•	•	•	•	•

WIRE&CABLES

Page	120	120	119	121	122
Model	MS6810	MS6811	MS6812A	MS6813	MS6818
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating					CAT III 300V
Auto Ranging					•
DC Voltage					12~400V
AC Voltage					12~400V
Frequency			300kHz	300kHz	125kHz
Low Battery Inficator		•			
Sensitivity Adjustable			•	•	•
Electric Wire			•	•	•
Coaxial Cable (BNC)	•			•	
Network Cable	•	•		•	
Telephone Wire			•	•	
Backlight					•
Worklight					•
Sound & light instructions			•	•	•

ELECTRICAL TESTERS

CAT II CAT III CAT IV											
	114	114	114	115	115	115	116	117	117	118	NEW 118
	MS8900A	MS8900C	MS8900N	MS8902A	MS8902B	MS8902H	MS8907	MS6580B	MS6580D	MS8922A	MS8922B
	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT II 1000V CAT III 600V	CAT III 600V	CAT II 1000V CAT III 600V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT II 1000V	CAT III 400V	CAT III 400V
Non Contact Volatge	90~1000V	100~240V	90~1000V	12~1000V	20~1000V	100~1000V	50~1000V	12~1000V	12~1000V		
Contact Volatge										400V	400V
Frequency	50~60Hz	50~60Hz	50~60Hz	50~500Hz	50~500Hz	50~500Hz	50~60Hz	50~60Hz	50~60Hz	50~60Hz	50~60Hz
Resistance											
Metal Detecting											
RCD Test											•
Work Light							•	•	•		
Sound & Light	•	•	•	•	•	•	•	•	•		
Auto Power Off				•	•			•	•		
Sensitivity adjustment				•	•			•	•		
Infrared temperature								-20~330°C -4~626°F	-20~330°C -4~626°F		

CIRCUIT ANALYZER

CAT II CAT III CAT IV					
	124	124	125	125	126
	MS5900	MS5901	MS5908A	MS5908C	MS5910
		CE/ETL	CE/ETL	CE/ETL	CE/ETL
Safety Rating	CAT III 600V	CAT III 600V	CAT III 300V	CAT III 300V	CAT III 300V
AC Voltage	400V	400V	190V	375V	440V
Frequency	400Hz	400Hz	45~65Hz	45~65Hz	45~65Hz
Motor & Phase Rotation Indicator	•	•			
Voltage Drop current			12/15/20A	5/8/10A	
Impedance measurement			•	•	
Loop Resistance measurement					•
GFCI Test			•	•	
RCD Test			•	•	•
Data Hold			•	•	
Backlight			•	•	•
Interface					USB

						
			NEW			
Page	128	128	129	130	130	131
Model	MS8910	MS8910A	MS8911	MS6013	MY6243	MS5308
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Auto Ranging	•	•	•			
Auto Power Off	•	•	•			
Resistance	300Ω/30MΩ	300Ω/30MΩ	60Ω/20MΩ			20Ω/200MΩ
Capacitance	3nF/30mF	3nF/30mF	600pF/6mF	200pF/20mF	2nF/200μF	200pF/20mF
Inductance			600μH/200H		2mH~2H	200μH~20kH
Diode	•	•				
Continuity Buzzer	•	•				
Auto Scanning	•		•			
Zero Adjustment				•		
LCR / DCR			•			•
Data Hold	•	•	•			•
Backlight						•
Relative Measurement						•
Interface						RS232

CAT II CAT III CAT IV			
Page	132	133	134
Model	MS7220	MS7221	MS7212
Certificate	CE/ETL	CE/ETL	
Safety Rating			CAT II 600V
Auto Ranging			•
DC Voltage	-10~75mV	100mV / 10V	300V
AC Voltage			300V
DC Current		0~24mA	400mA
AC Current			400mA
Resistance			400kΩ
Frequency			30kHz
Thermocouple Type	K.J.T.E.R.S.B.N		
Temperature	-250~1800°C -418~3272°F		-50~1300°C
MAX/MIN/AVG			•
Backlight			•
Data Hold			•
Interface			USB / RS232

										
	NEW									
Page	136	138	139	139	139	140	140	141	141	141
Model	MS6561	MS6518	MS6522A	MS6522B	MS6522C	MS6530T	MS6541	MS6531A	MS6531B	MS6531C
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Color Display								•	•	•
IRT Temperature	-20~400°C -4~752°F		-20~300°C -4~572°F	-20~500°C -4~932°F	0~100°C 32~212°F	-20~350°C -4~662°F	-50~760°C -58~1400°F	-60~500°C -76~932°F	-40~800°C -40~1472°F	-40~800°C -40~1472°F
IRT Temperature [Body 5~15cm]		32~42°C 89~108°F			32~42°C 89~108°F					
Type K Temperature							-50~300°C -58~572°F	-40~1080°C -40~1976°F		-40~1080°C -40~1976°F
Distance to Spot(D:S)	30:1		10:1	10:1	10:1	12:1	30:1	12:1	12:1	12:1
Emissivity	0.1~0.99	0.98	0.95	0.95	0.95	0.95/0.85/ 0.75	0.1~0.99	0.1~0.99	0.1~0.99	0.1~0.99
MAX/MIN/AVG/DIF			MAX/MIN/ AVG	MAX/MIN/ AVG	MAX		•	•	•	•
Data Logging		10 groups					100 groups			20 groups
Backlight		•	•	•	•	•	•	•	•	•
Data hold		•	•	•	•	•	•	•	•	•
Interface	USB/ MicroSD Card									

									
Page	146	146	144	144	145	145	142	143	143
Model	MS6500	MS6501	MS6511	MS6512	MS6513	MS6514	MS6508	MS6503	MS6505
Certificate	CE/ETL		CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL		
Thermocouple Type	K	K	K.J.T.E	K.J.T.E	K.J.T.E. R.S.N	K.J.T.E. R.S.N			
Temperature	-50~750°C -58~1382°F	-50~150°C -58~302°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F	-200~1372°C -328~2501°F	-20~60°C -4~140°F	-20~60°C -4~140°F	-20~60°C -4~140°F
Injection Method	Single	Single	Single	Dual	Single	Dual			
Channel			TC	T1/T2/T1-T2	TC	T1/T2/T1-T2			
Relative Humidity							0~100%	0~100%	0~100%
Update Rate	500mS	500mS					400mS		
Clock									•
MAX/MIN/AVG/DIF			•	•	•	•	MAX/MIN	MAX/MIN	MAX/MIN
Date Logging					1000 groups	1000 groups	100 groups		16300 groups
Backlight							•	•	•
Date Hold	•	•	•	•	•	•	•	•	•
Interface					USB	USB		RS232	RS232

DIGITAL LIGHT METERS

				
				NEW
Page	148	149	149	149
Model	MS6610	MS6612	MS6612T	MS6612D
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Auto Ranging		•	•	•
Auto Power Off		•	•	•
Display Counts	2000	2000	2000	2000
Range	50000Lux	200000Lux 20000FC	200000Lux 20000FC 999900CD	200000Lux 20000FC 999900CD
Unit Selection	Lux	Lux / FC	Lux / FC / CD	Lux / FC / CD
Relative		•	•	•
Peak		•	•	•
MAX/MIN		•	•	•
Data Hold	•	•	•	•
Bar Graph		•	•	•
LED light source			•	•
Interface				Wireless

TACHOMETERS

		
Page	150	150
Model	MS6208A	MS6208B
Certificate	CE/ETL	CE/ETL
Contact	50~19999	
Non-Contact measurement		50~99999RPM
Measuring Distance		50~250mm
Auto Power Off	•	•
MAX/MIN	•	•
Data Hold	•	•
Backlight	•	•
Unit Selection	•	
Data Logging	100 Groups	100 Groups

DISTANCE METERS

							
Page	152	152	152	152	152	152	152
Model	MS6414	MS6416	MS6418	MS64100	MS6404	MS6406	MS6408
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Auto Power Off	•	•	•	•	•	•	•
Distance	0.05~40m	0.05~60m	0.05~80m	0.05~100m	0.05~40m	0.05~60m	0.05~80m
Accuracy	±1.5mm	±1.5mm	±1.5mm	±1.5mm	±2.0mm	±2.0mm	±2.0mm
Area & Volume	•	•	•	•	•	•	•
Pythagorean proposition measurement	•	•	•	•	•	•	•
Unit (meter / Inch / feet)	•	•	•	•	•	•	•
Backlight	•	•	•	•	•	•	•
Foor Level	•	•	•	•	•	•	•
Laser target point	•	•	•	•	•	•	•
Data Logging	99 groups	99 groups	99 groups	99 groups	30 groups	30 groups	30 groups

ANEMOMETERS

			
			NEW
Page	151	151	151
Model	MS6252A	MS6252B	MS6252D
Certificate	CE/ETL	CE/ETL	CE/ETL
m/s (meter per second)	0.8~40 m/s	0.8~40 m/s	0.8~40 m/s
km/h (kilometer per hour)	2.88~144 km/h	2.88~144 km/h	2.88~144 km/h
ft/s (feet per second)	2.62~131.2 ft/s	2.62~131.2 ft/s	2.62~131.2 ft/s
Knots (nautical miles per hour)	1.6~77.70 Knots	1.6~77.70 Knots	1.6~77.70 Knots
mile/h (mile per hour)	1.8~90.00 mile/h	1.8~90.00 mile/h	1.8~90.00 mile/h
ft/m (feet per minute)	157.5~7874 ft/m	157.5~7874 ft/m	157.5~7874 ft/m
Temperature		-10~60°C	-10~60°C
Relative Humidity		20~80%RH	20~80%RH
Ambient		•	•
Dew point		•	•
Wet Bulb		•	•
Interface		USB	Wireless

MOISTURE TESTERS

		
Page	153	153
Model	MS6900	MS6900A
Certificate	CE/ETL	CE/ETL
Range	Wood , Brick, Plaster ...	Wood , Brick, Plaster ...
Testing Depth	50mm	50mm
Object moisture	0~60%	0~60%
Ambient TEMP	-10~50°C 14~122°F	-10~50°C 14~122°F
Sampling Rate	240mS	240mS
MAX/MIN	•	•
Unit Selection	WB, TD, °C, °F, %RH	WB, TD, °C, °F, %RH
Auxiliary Verification		•
Data Hold	•	•
Backlight	•	•

DIGITAL SOUND LEVEL METERS

				
Page	155	155	155	154
Model	MS6700	MS6701	MS6702	MS6708
Certificate	CE/ETL	CE/ETL	CE/ETL	CE/ETL
Display	2000	2000	2000	2000
Auto Ranging	•	•	•	•
Auto Power Off	•	•	•	•
Sound Level	30~130dB	30~130dB	30~130dB	30~130dB
Dynamic	50dB	50dB	50dB	50dB
Frequency	30Hz~8kHz	30Hz~8kHz	30Hz~8kHz	30Hz~8kHz
A / C Weighting	•	•	•	•
Data Logging		16000		
Data Hold				•
Date / Time	•	•		
Backlight	•	•	•	•
MAX	•	•	•	•
AC adapter	•	•	•	
AC/DC Signal output	•	•	•	
Temperature			-20~60°C	
Relative humidity			10~90%RH	
°C / °F selection			•	
Interface		RS232 /USB		

OTHER TESTING INSTRUMENTS

	
Page	156
Model	MS6310
Certificate	CE/ETL
Alarm at level	10%~40%
Response Time	2 seconds
Warm up time	2 Minutes
Easy to Identify	•
Pinpoint Gas Leaks	•
Portable	•
High Sensitivity	•
Resume Original measurement	State after 7~10 min in clear air
Gas Detected	Natural gas, Methane, Ethane, Propane


		
Page		157
Model		MS6300
Certificate		CE/ETL
Auto Ranging		●
Auto Power Off		●
Temperature		-10~60°C
Humidity		20~80%RH
Sound level		30~130dB
Illuminance		50000Lux
Wind Speed	m/s	0.5~20
	km/h	1.8~72
	FPM	100~4000
	Knots	0.9~38.9
AirFlow [CMM]		0~999900
AirFlow [CFM]		0~999900
A / C Weighting		●
MAX/MIN/AVG/DIF		●
Data Hold		●
Backlight		●

■ CAT II	
■ CAT III	
■ CAT IV	
Page	158
Model	MS2309
Certificate	CE/ETL
Safety Rating	CAT III 600V
Resistance	4.0000~400.00Ω
Measurement Voltage	AC 600V
Auto Power Off	•
Backlight	•
Interface	USB

OTHER TESTING INSTRUMENTS

■ CAT II			
■ CAT III			
■ CAT IV			
Page	NEW 159	NEW 159	NEW 159
Model	MS5911	MS5911A	MS5911D
Certificate	CE	CE	CE
Safety Rating	CAT II 300V	CAT II 300V	CAT II 300V
Grounding	20Ω	20Ω	20Ω
Insulation Resistance	20MΩ	20MΩ	20MΩ
leakage current	10.5mA	10.5mA	10.5mA
Cord Test	•	•	•
Polarity Test	•	•	•
Power Socket Test	•	•	•
Auto Power Off	•	•	•
Backlight	•	•	•
Data logging	300 groups	300 groups	300 groups

■ CAT II			
■ CAT III			
■ CAT IV			
Page	160	160	160
Model	MS922A	MS922D	MS922E
Certificate	ETL		
Safety Rating	CAT II 600V	CAT II 600V	CAT II 600V
AC Volatge	125V	250V	250V
AC Current	15A	15A	15A
Frequency	50~60Hz	50~60Hz	50~60Hz
Feature	-Allows for easy AC Current measurements		
	-Using a Clamp meter on 2 or 3 Wire Power Cords		
	-Provides the Ability to Safely Measure Current without the need to cut or separate conductors		
	-Separates the Hot/Live conductor from the Neutral and Ground		
Style	-Voltage check sockets for easy power calculations		
	USA	EU	UK

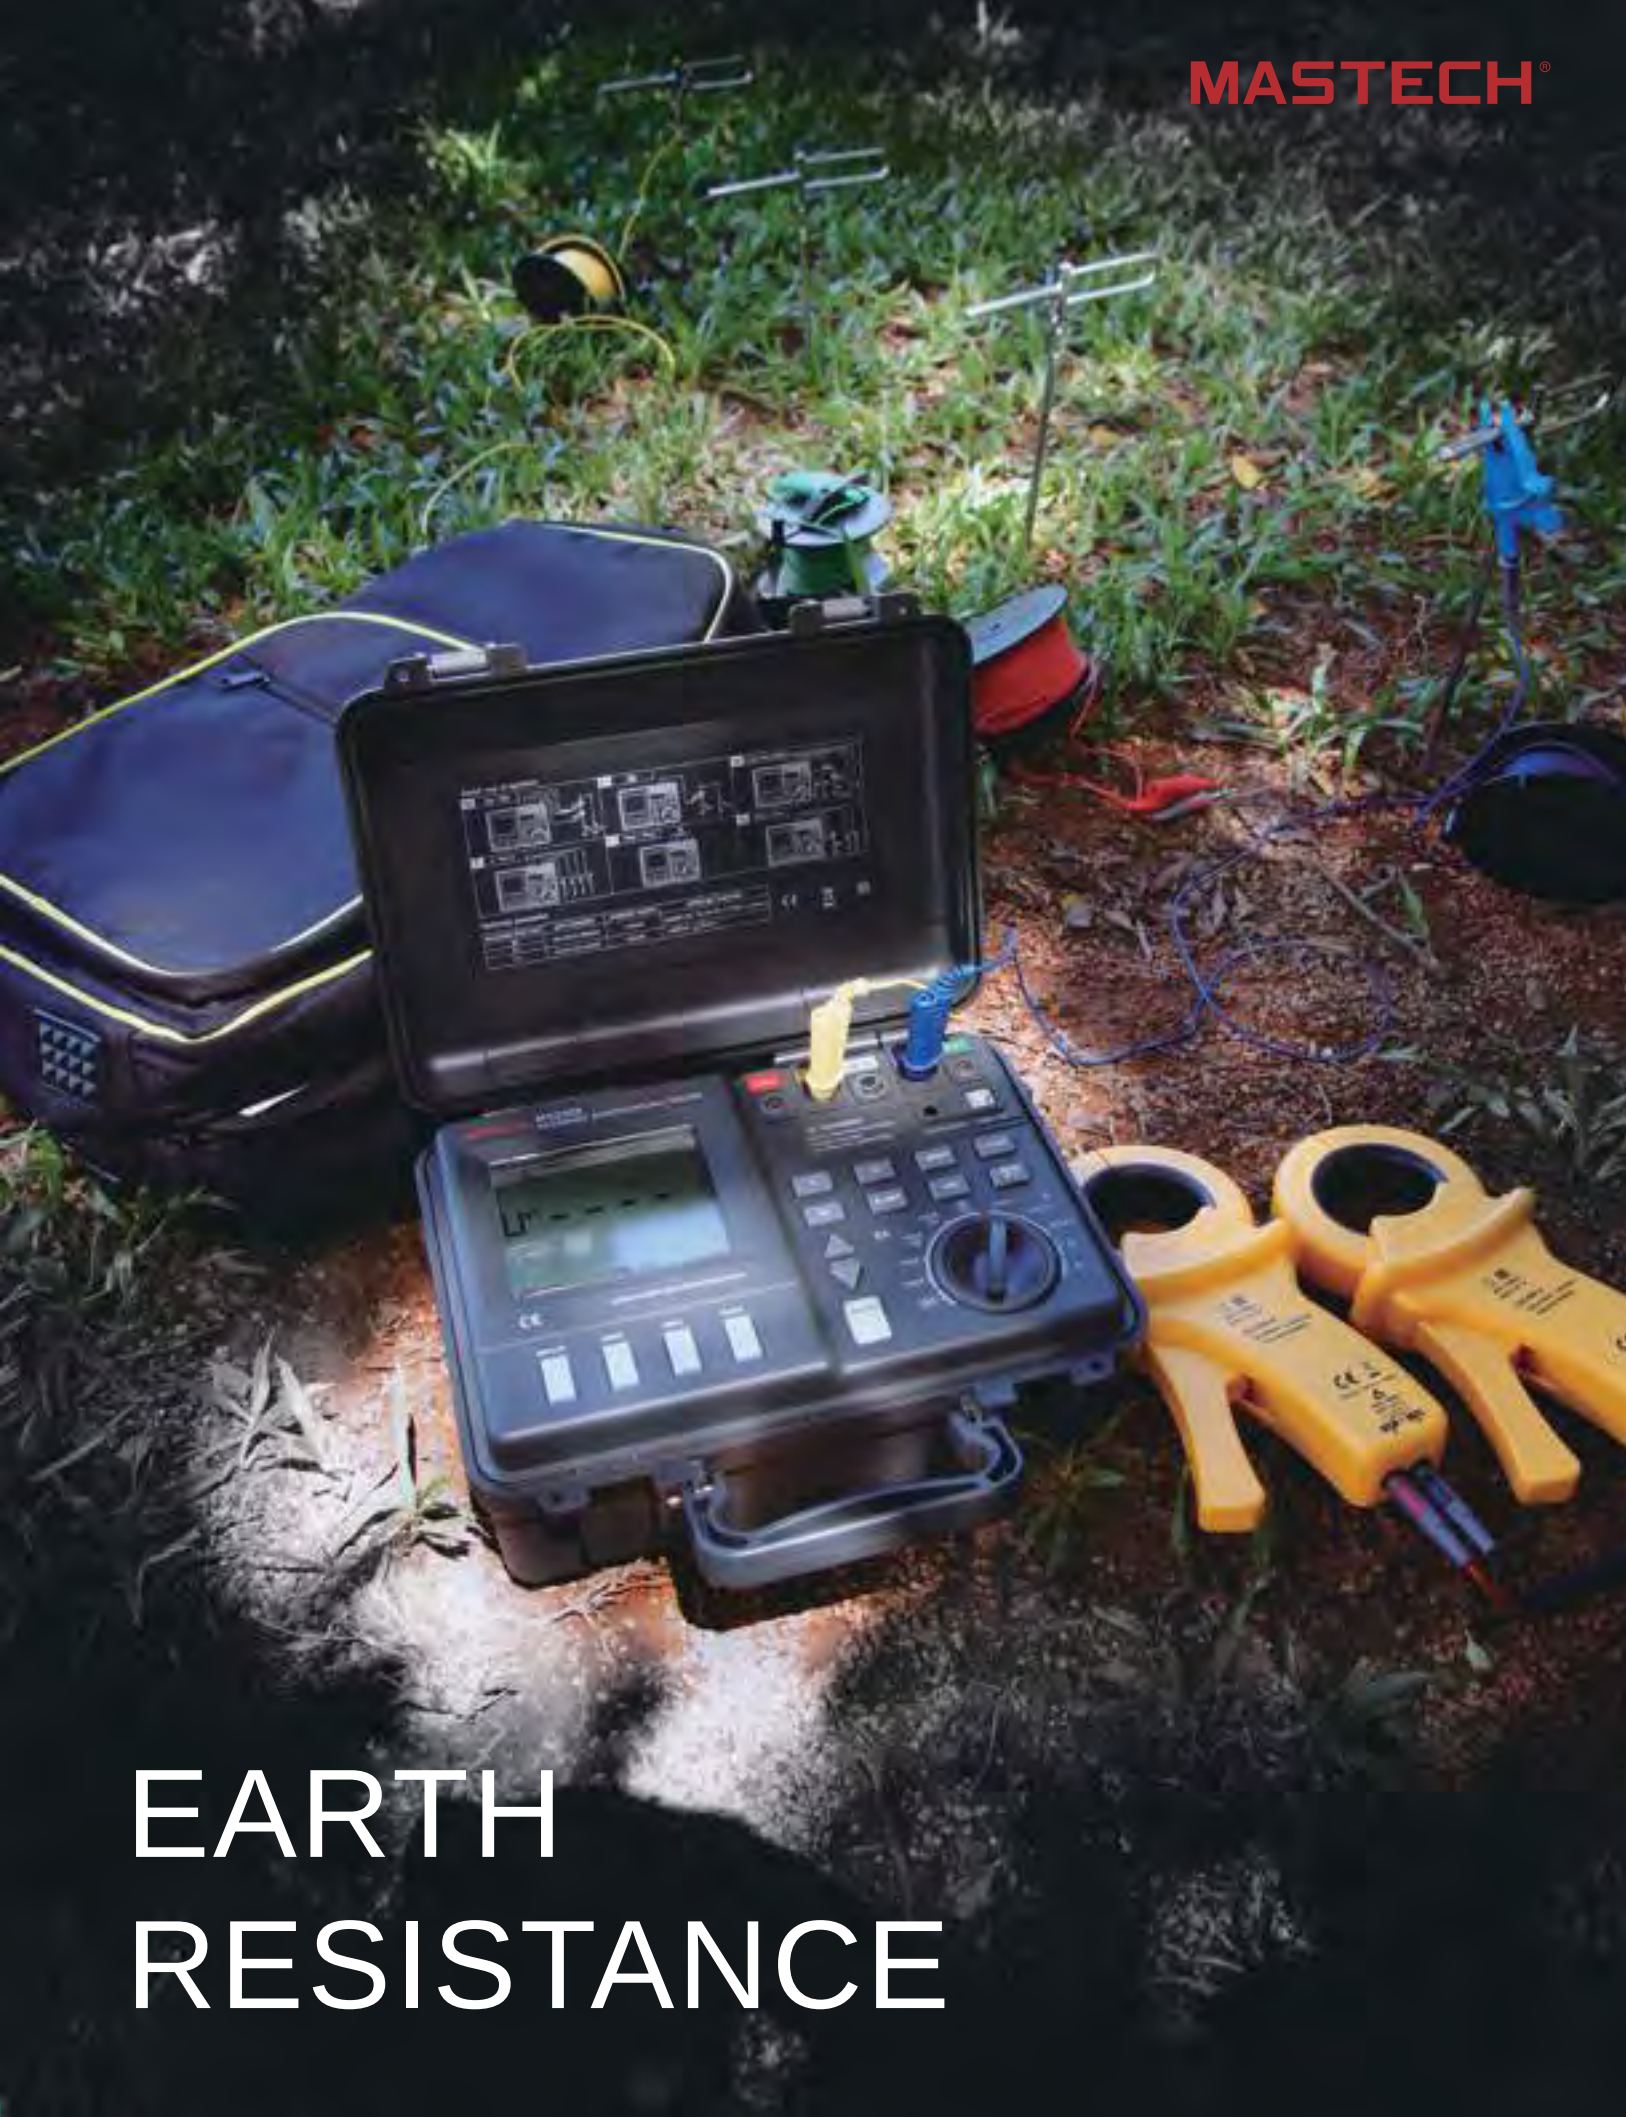

EARTH
RESISTANCE

MS2301

EARTH RESISTANCE CLAMP METER



A 100mA~20A





R 0.01~1200Ω

Specifications	Range	Resolution	Accuracy
Earth Resistance	0.01Ω~0.999Ω	0.001Ω	±(1.5%+0.01Ω)
	1Ω~9.99Ω	0.01Ω	±(1.5%+0.3Ω)
	10Ω~99.9Ω	0.1Ω	±(3.0%+0.3Ω)
	100Ω~199.9Ω	1Ω	±(5.0%+3Ω)
	200Ω~400Ω	5Ω	±(6.0%+5Ω)
	400Ω~500Ω	10Ω	±(10%+10Ω)
Current	500Ω~1200Ω	20Ω	approx. 20%
	100mA	0.1mA	±(2.5%+1mA)
	300mA	0.3mA	±(2.5%+2mA)
	1A	0.001A	±(2.5%+0.003A)
	3A	0.003A	±(2.5%+0.01A)
	10A	0.01A	±(2.5%+0.03A)
	20A	0.03A	±(2.5%+0.05A)

Features		
Display	counts	9999
Jaw Opening	45mmx32mm/1.8"x1.3"	•
Auto Ranging	Auto	•
Test Voltage	3700V	•
Logging and Recall	99 groups	•
Alarm Limit Setting	Setting Alarm Threshold in 1~100Ω	•
LBD	Low Battery Display	•
Buzzer ON Symbol		•
Data Hold		•

General	
Power Supply	1×9V Alkaline Battery
Product Size	276mm×104mm×54mm/10.8"×4.33"×2.1"
Product Weight	1050g/2.31lb
Certificate	CE/ETL/RoHS
Safety Rating	CAT III 150V

Accessories Included	
Calibration loop of resistance (1Ω/5Ω/10Ω)	
Carry Case	
Battery and User's Manual	

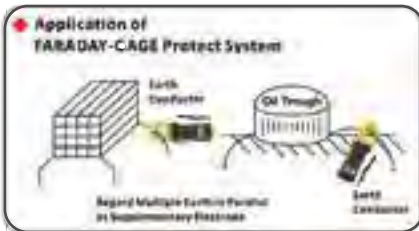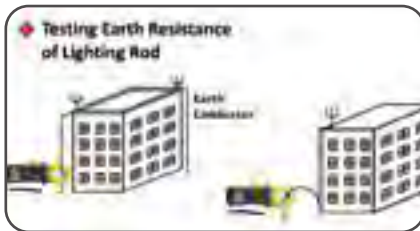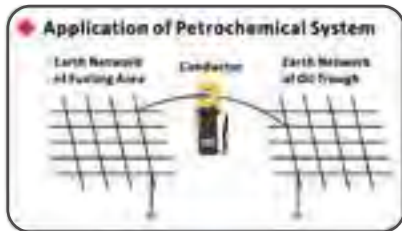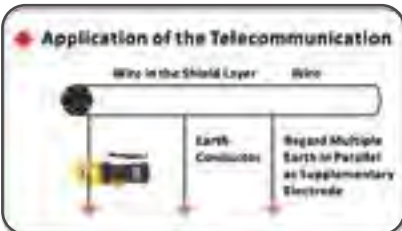

MS2302

EARTH RESISTANCE TESTER






V 0~200V

R 0.01~4000Ω

Specifications	Range	Resolution	Accuracy
Earth Ground Resistance	0~29.99Ω	0.01Ω	±(2%+6)
	30~99.9Ω	0.1Ω	±(3%+3)
	100~999Ω	1Ω	±(3%+3)
	1.00~4.00kΩ	10Ω	±(3%+3)
Measuring Voltage to Earth	AC 0~200V(50Hz/60Hz)	0.01V	±(2%+4)

Features		
Auto Ranging	Auto and Manual	•
APO	Auto Power Off	•
Segments Bar Graph		•
MAX/MIN/AVG		•
Continuity Test		•
REL	Relative Measurement	•
Data Logging	99 groups	•
Display Backlight		•
LBD	Low Battery Display	•

General	
Power Supply	6×1.5V AA Batteries
Product Size	330mm×265mm×125mm/13"×10.4"×4.9"
Product Weight	900g/1.98lb
Certificate	CE/ETL/RoHS
Safety Rating	CAT III 300V

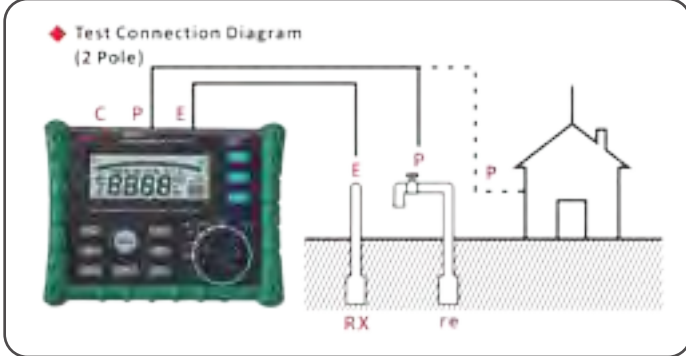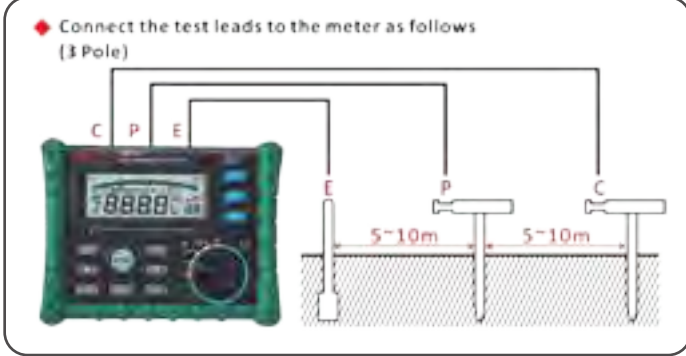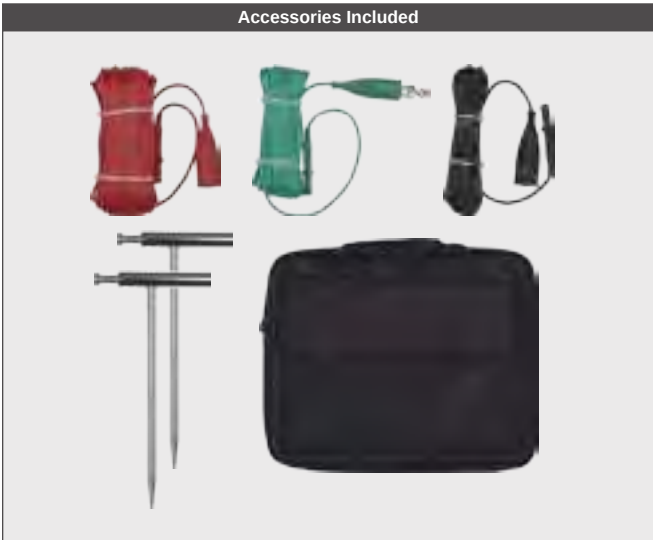

MS2308

MS2306 / MS2307

ADVANCED EARTH RESISTANCE TESTER



MS2308

MS2306 / MS2307

ADVANCED EARTH RESISTANCE TESTER

MASTECH®

Methods	Specifications	Resolution	Accuracy	MS2306	MS2307	MS2308
				Range		
3 Pole & 4 Pole Earthing-Resistance Test	Test Voltage: AC20/48V	0.001Ω	±(5%+10)	0.1Ω~20kΩ (94Hz/128Hz)	0.1Ω~30kΩ	0.02Ω~300kΩ
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC					
	Earthing-Resistance Test					
Selective mode (3 pole+ / 4 pole)	Test Voltage: AC20/48V	0.001Ω	±(5%+10)		0.1Ω~10kΩ	0.02Ω~20kΩ
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC					
	Earthing-Resistance Test					
Non-auxiliary-polar mode ()	Test Voltage: AC48V	0.001Ω	±(10%+10)		0.1Ω~150Ω	0.02Ω~150Ω
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC					
	Earthing-Resistance Test					
2 Pole R (AC)	Test Voltage: AC20V	0.001Ω	±(5%+10)	0.1Ω~20kΩ (94Hz/128Hz)	0.1Ω~30kΩ	0.02Ω~300kΩ
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC					
	Earthing-Resistance Test					
2/4 Pole R (DC)	Test Voltage: DC20V	0.001Ω	±(5%+10)		0.1Ω~3kΩ	0.02Ω~3kΩ
	Earthing-Resistance Test					
Soil Resistivity ρ	Test Voltage: AC20/48V	0.001Ω	±(5%+10)	0.02~1000 (94Hz/128Hz)	0.02~1000	0.02~1000
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC Range: (kΩ·m)					
RK (Wire Compensation)	Test Voltage: AC20/48V	0.001Ω	±(3%+10)	30Ω (94Hz/128Hz)	30Ω	30Ω
	Test Frequency: 94Hz/105Hz/111Hz/128Hz/AFC					
	Range: 30Ω					
Interfering Voltage/ Current/Frequency	Interfering Voltage: 1~50V DC/AC	0.1V	±(5%+5)	•	•	•
	Interfering Frequency: 16Hz~400Hz	1Hz	±(1%+10)	•	•	•
	Interfering Current: 20mA~2A	1mA	±(5%+5)	•	•	•
Short Circuit Current				≤100mA	≤100mA	≤250mA
Features						
Display	Digital/analog dual display; LCD with backlight				9999	
Apo	Auto Power Off				•	
Clock	To switch input-cursor position when changing date/time				•	
AVG	Indicator for averaged-value measurement				•	
RK	Compensation Resistance				•	
Limit	Limit Value				•	
•)	Alarming indicator for limit-value measurement				•	
	Battery capacity indicator				•	
B.Light	Display Backlight				•	
Length	Testing length between resistivity testing point				•	
Data Storage	100 groups measurement can be memorized				•	
USB	USB 2.0 Interface				•	•
General						
Power supply	6XLR14 alkaline(2#); rated voltage: 6×1.5V					
	Recharge Battery: NI-MH Recharge Battery, 7.2V					
	Charger: Input voltage: 100V~240V; Frequency: 50Hz~60Hz; Output Voltage: 12VDC 3A					
Product Size	284mm×230mm×125mm/11.2"×9.1"×4.9"					
Product Weight	2.5kg/5.5lb					
Certificate	CE/ETL/RoHS					



MS5209

ANALOG EARTH RESISTANCE TESTER



V AC 30V
R 1000Ω

Specifications	Range	Accuracy
Earth Ground Resistance	10Ω	±5%
	100Ω	±5%
	1000Ω	±5%
Voltage to Earth Features	30V(AC)	±5%
Features		
Measurement System	Earth Resistance : By Constant Current Inverter 800Hz approx, 2mA Earth Voltage: By Rectifier Type 5kΩ/V approx, 40~50Hz	
Withstand Voltage	1500V AC for one minute between electrical circuit and housing case.	
Self-Check Facility	Lead wire connection to C and P terminals and proper auxiliary earth resistance can be checked by pressing "BATT.CHECK" button. "OK" lamp is illuminated.	
General		
Power Supply	8×1.5V AA Batteries	
Product Size	140mm×140mm×90mm/5.5"×5.5"×3.5"	
Product Weight	800g/1.76lb	
Certificate	RoHS	

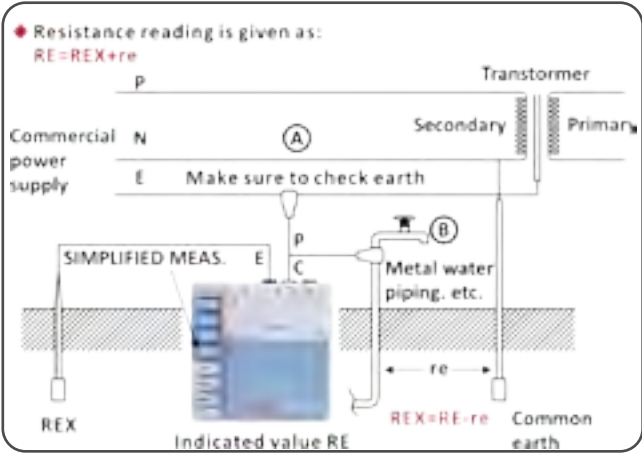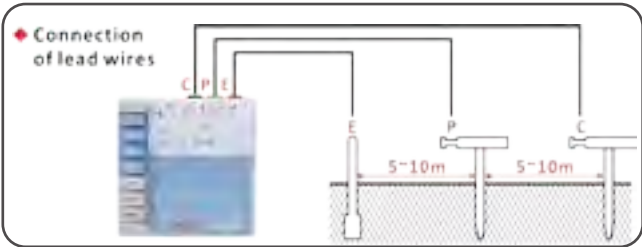

MS5202

DIGITAL / ANALOG HIGH VOLTAGE INSULATION TESTER




V DC 2500V
OUTPUT
R 0~100GΩ



MS5202				
Specifications				
Measuring Voltage		DC Voltage		
Range		0~2000MΩ/1000~100000MΩ(Auto-range)		
Accuracy	Insulated Resistance	0~100MΩ	±3.0% of arc	Surroundings' temperature : 23 ±5°C Relative humidity : < 70%
		100~50000MΩ	±2.5% of arc	
		50000~100000MΩ	±3.0% of arc	Surroundings' temperature : 0~ +40°C Relative humidity : < 85%
		0~100MΩ	±6.0% of arc	
		100~50000MΩ	±5.0% of arc	
	50000~100000MΩ	±6.0% of arc		
Output Voltage	2500V ±10%		100~100000MΩ	
Insulated Resistance		1000MΩ max./1000V		Between the circuit and the case
Voltage-Resistant		5000V AC per minute		
Features				
Inner Battery Testing		Checking the inner (AA) 12V battery status		
LBD		Low Battery Display		
LOCK		Constant Measuring Lock		
General				
Power Supply		8×1.5V AA Batteries/1×9V 6F22 Battery		
Product Size		225mm×138mm×81mm/8.86"×5.3"×3.19"		
Product Weight		1200g/2.75lb		
Certificate		RoHS		
Safety Rating		CAT II 1000V		

Accessories Included

Test Leads
Test Clips
Wrapping Bag
Battery and User's manual

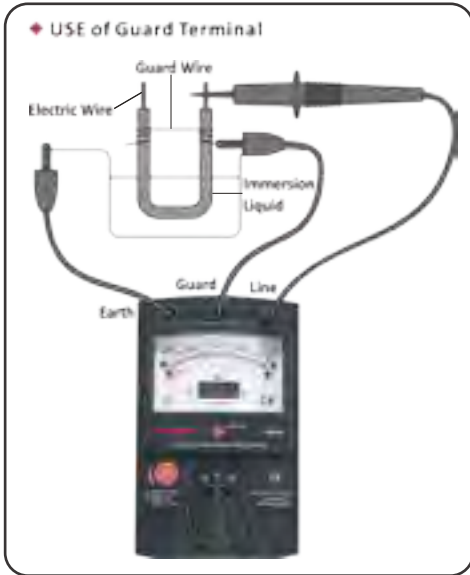

MS5203 MS5203A
DIGITAL INSULATION TESTER



V DC 1000V
AC 750V
R 10GΩ

			MS5203	MS5203A	
Output Voltage	Range	Resolution	Test Current	Accuracy	
50V (0~20%)	0~20MΩ	0.01MΩ	1mA	±(3%+5)	
	20~50MΩ	0.1MΩ	@50k		
100V (0~20%)	0~20MΩ	0.01MΩ	1mA	±(3%+5)	
	20~100MΩ	0.1MΩ	@100k		
250V (0~20%)	0~20MΩ	0.01MΩ	1mA @250k	±(3%+5)	
	20~200MΩ	0.1MΩ			
	200~250MΩ	1MΩ			
500V (0~20%)	0~20MΩ	0.01MΩ	1mA @500k	±(3%+5)	
	20~200MΩ	0.1MΩ			
	200~500MΩ	1MΩ			
1000V (0~20%)	0~200MΩ	0.1MΩ	1mA @1000k	±(3%+5)	
	200~1000MΩ	1MΩ		±(5%+10)	
	1.00~5.00GΩ	0.01GΩ		±(10%+20)	
	5.00~10.00GΩ	0.01GΩ		±(10%+20)	
DC Voltage Test	200V/1000V	0.1V/1V		±(0.5%+5)	
AC Voltage Test	200V/750V	0.1V/1V		±(1.5%+5)	
Resistance/ Continuity Test	0.01~20.0Ω	0.01Ω	1mA	±(1%+5)	
	20.1Ω~200.0Ω	0.1Ω		±(2%+5)	
	0.01~20.0Ω	0.01Ω	>200mA		±(1%+5)
	20.1Ω~200.0Ω	0.1Ω			±(2%+5)
Features					
APO	Auto Power Off			●	
MIN/MAX/AVG				●	
COMP	Compare function			●	
TIMER				●	
MEMO	Storage function			●	
DAR/PASS				●	
Backlight				●	
REL	Relative Measurement			●	
Data Hold	LOCK			●	
LBD	Low Battery Display			●	
General					
Power Supply	6×1.5V AA Batteries				
Product Size	200mm×155mm×76mm/7.6"×5.9"×2.95"				
Product Weight	900g/1.98lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 1000V/CAT IV 600V				

- Accessories Included
- Test Leads
 - Test Clips
 - Wrapping Bag
 - Battery and User's manual

MS5205 MS5205B
HIGH VOLTAGE DIGITAL INSULATION TESTER



V DC 2500V
OUTPUT
V DC 1000V
AC 750V
R 100GΩ

			MS5205	MS5205B
Output Voltage	Range	Resolution	Test Current	Accuracy
250V (0~20%)	0~20MΩ	0.01MΩ	1mA @250k	±(3%+5)
	20~200MΩ	0.1MΩ		
	200~250MΩ	1MΩ		
500V (0~20%)	0~20MΩ	0.01MΩ	1mA @500k	±(3%+5)
	20~200MΩ	0.1MΩ		
	200~500MΩ	1MΩ		
1000V (0~20%)	0~20MΩ	0.01MΩ	1mA @1000k	±(3%+5)
	20~200MΩ	0.1MΩ		
	200~1000MΩ	1MΩ		
2500V (0~20%)	0~2000MΩ	1MΩ	3mA @2500k	±(3%+5)
	2000MΩ~20GΩ	0.01GΩ		±(5%+20)
	20GΩ~100GΩ	0.1GΩ		±(10%+20)
	100GΩ~300GΩ	0.1GΩ		±(20%+20)
DC Voltage Test	200V/1000V	0.1V/1V		±(0.5%+5)
AC Voltage Test	200V/750V (50~60Hz)	0.1V/1V		±(1.5%+5)
Resistance	20Ω	0.01Ω	1mA	±(1%+5)
	200Ω	0.1Ω		±(1%+5)
Features				
APO	Auto Power Off			●
LOCK				●
MIN/MAX/AVG				●
COMP	Compare function			●
TIMER	Timer function			●
MEMO	Storage function			●
DAR				●
PASS				●
Backlight				●
REL	Relative Measurement			●
Data Hold				●
LBD	Low Battery Display			●
Operating Temperature	-30°C~-40°C			
General				
Power Supply	8×1.5V AA Batteries			
Product Size	180mm×140mm×65mm/7.1"×5.5"×2.56"			
Product Weight	900g/1.98lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 1000V/CAT IV 600V			

- Accessories Included
- Test Leads
 - Test Clips
 - Wrapping Bag
 - Battery and User's manual

MASTECH®




MS5215

ADVANCED HIGH VOLTAGE INSULATION TESTER




V DC 50-1000V
AC 50-750V
R 0.01MΩ~5TΩ
V OUTPUT DC 5000V

Insulation Resistance Test

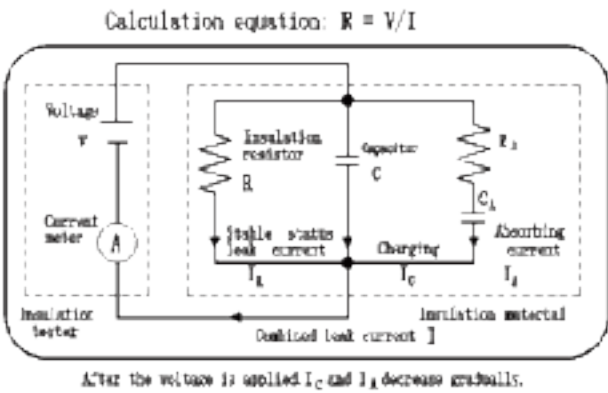

Cable Test

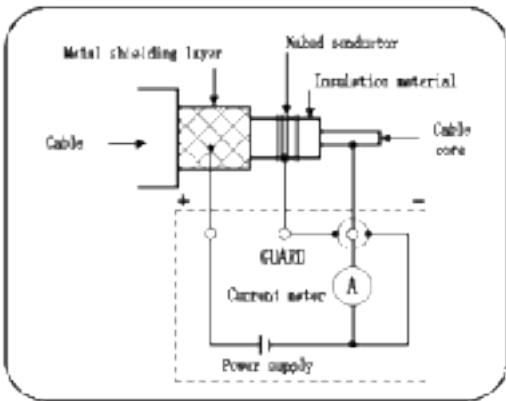

Rc: insulation resistance of the insulation material for high-voltage cables.
(between core and metal shielding layer)
Rs: insulation resistance of the protective layer for high-voltage cables.
(between metal shielding layer and earth)
Rn: insulation resistance between the insulation device or high-voltage equipment
and earth Interference from Rs and Rn is eliminated, and only Rc is tested.



MS5215

ADVANCED HIGH VOLTAGE INSULATION TESTER

Accessories Included	
Host computer x 1	
Tester probes leads x 3	
Grounding clips x 3	
USB x 1	
Rechargeable battery pack (for charging by battery) To be used with AC charger x 1	
Temperature Sensor x 1	
Users Manual x 1	
Instrument backpack x 1	

MS5215		
Insulation		
Operating Voltage	Measuring Range	Accuracy
250V DC	0.01MΩ~2.5GΩ	±(5%+5)
	2.51GΩ~250GΩ	±(20%+10)
500V DC	0.01MΩ~5.0GΩ	±(5%+5)
	5.01GΩ~500GΩ	±(20%+10)
1000V DC	0.01MΩ~10GΩ	±(5%+5)
	10.01GΩ~500GΩ	±(20%+10)
	501GΩ~999GΩ	±(30%+20)
2.5KV DC	0.01MΩ~25GΩ	±(5%+5)
	25.1GΩ~500GΩ	±(20%+10)
	501GΩ~999GΩ	±(30%+20)
	1TΩ~2.5TΩ	±(30%+40)
5KV DC	0.01MΩ~50GΩ	±(5%+5)
	50.1GΩ~500GΩ	±(20%+10)
	501GΩ~999GΩ	±(30%+20)
	1TΩ~5TΩ	±(30%+40)
Leakage Current		
Range	Measuring Range	Accuracy
10nA	1.00nA~9.99nA	±(15%+1nA)
100nA	9.0nA~99.9nA	±(15%+5)
1000nA	100nA~999nA	±(2.5%+5)
10μA	0.90μA~9.99μA	
100μA	9.0μA~99.9μA	
1000μA	90μA~999μA	
3mA	0.90mA~3.00mA	
Resistance		
Range of insulation	Range of humidity	Range of temperature
0Ω~100MΩ	<85% RH	23°C ±5°C 73°F ±9°F
101Ω~20GΩ	<75% RH	
21GΩ~500GΩ	<65% RH	
501GΩ~5TΩ	<55% RH	
Voltage		
Test Mode	DC Voltage	AC Voltage
Test Range	±(50V~1000V)	±50V~750V (50Hz~60Hz)
Precision error	±(5%+5)	±(5%+5)
Input Resistance	Approx. 10MΩ	Approx. 10MΩ
Temperature		
Measuring Range	Measuring Precision Accuracy	
-10°C~0°C	±1.5°C	
0°C~40°C	±2.0°C	
40°C~70°C	±1.5°C	
General		
Power Supply	6×Lr14(2#) Batteries, or 6×1.2V AA Batteries (Charger: Input Voltage 100V~240V)	
Product Size	284mm×230mm×125mm/11.2"×9.1"×4.9"	
Product Weight	2426g/5.34lb	
Certificate	CE/ETL/RoHS	
Safety Rating	CAT III 1000V/CAT IV 600V	

MS5201

DIGITAL INSULATION TESTER



V DC 1000V
AC 700V

V OUTPUT DC 1000V

R 2000MΩ

MS5201			
Specifications	Range	Resolution	Accuracy
AC Voltage (40~400Hz)	700V	1V	±(1.2%+5)
DC Voltage	1000V	1V	±(0.8%+3)
Resistance	200Ω @1mA	0.1Ω	±(1.0%+3)
Insulation Test Voltage	Resistance Range		Accuracy
DC 250V ±10%	200MΩ		±(3%+5)
DC 500V ±10%	200MΩ		±(3%+5)
DC1000V ±10%	50~1000MΩ		±(3%+5)
	1000~2000MΩ		±(5%+5)
Output Short Circuit Current	≤2.5mA		
Features			
Display	counts	2000	
Continuity Buzzer	<50Ω	●	
Data Hold		●	
LBD	Low Battery Display	●	
LOCK	Constant Measuring Lock	●	
General			
Power Supply	6×1.5V AA Batteries		
Product Size	192mm×122mm×55mm/7.48"×4.7"×2.2"		
Product Weight	545g/1.3lb		
Certificate	RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		



MASTECH®

Digital Multimeters



MS8238H

DIGITAL MULTIMETER with Wireless



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8238H			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V	0.1mV/0.001V/0.01V/0.1V	±(0.5%+2)
	600V	1V	±(0.8%+5)
AC Voltage	4V/40V/400V/600V	0.001V/0.01V/0.1V/1V	±(1.0%+10)
	600V	1V	±(1.2%+8)
DC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA	±(1.0%+10)
	10A	0.01A	±(2.0%+8)
AC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA	±(1.2%+5)
	10A	0.01A	±(2.0%+8)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ/0.001MΩ	±(0.8%+3)
	40MΩ	0.01MΩ	±(1.2%+3)
Temperature	-20°C~1000°C	1°C	±(2.0%+2)
	-4°F~1832°F	1°F	±(2.0%+4)
Features			
Display	Counts		4000
Auto range	Auto & Manual		•
APO	Auto Power Off		•
True RMS	For AC Voltage & AC Current		•
Continuity Buzzer	<50Ω		•
Diode	Open Voltage		3.2V
Data Hold			•
LBD	Low Battery Display		•
NCV	Non-Contact Voltage Detector		•
Battery Tester	1.5V/9V		•
Wireless	APP connection		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	148mm×73.5mm×50mm / 5.8"×2.9"×1.96"		
Product Weight	241g/0.53lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

- Accessories Included
- Test Leads
 - K Type Thermocouple
 - Battery and User's Manual



MS8361D

DIGITAL MULTIMETER with Wireless



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8361D			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V	0.1mV/0.001V/0.01V/0.1V	±(0.8%+3)
	600V	1V	±(1.0%+5)
AC Voltage	4V/40V/400V/600V	0.1mV/0.001V/0.01V/0.1V	±(1.0%+8)
	600V	1V	±(1.2%+8)
DC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA	±(1.0%+10)
	10A	0.01A	±(2.0%+5)
AC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA	±(1.5%+5)
	10A	0.01A	±(3.0%+5)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)
	40MΩ	0.001MΩ/0.01MΩ	±(1.5%+5)
Capacitance	9.999nF/99.9nF/9.999μF/99.99μF/999.9μF/9.999mF/99.99mF	0.001nF/0.01nF/0.001μF/0.01μF/0.1μF/0.001mF/0.01mF	±(4.0%+5)
Frequency (V)	99.99Hz/999.9Hz/9.999kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
	> 10kHz	0.01kHz	
Frequency (A)	99.99Hz/999.9Hz	0.01Hz/0.1Hz	±(1.5%+5)
	> 1kHz	0.001kHz	
Frequency (Hz/Duty)	9.999Hz/99.99Hz/999.9Hz/9.999kHz/99.99kHz/999.9kHz/9.999MHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz	±(0.3%+5)
		0.01kHz/0.1kHz/0.001MHz	±(0.3%+5)
Duty Cycle	0.1%-99.9%	0.1%	±3.0%
Features			
Display	Counts		4000
Auto range	Auto & Manual		•
APO	Auto Power Off		•
True RMS	For AC Voltage & AC Current		•
Continuity Buzzer	<50Ω		•
Diode	Open Voltage		3.2V
hFE	0~1000		•
Data Hold			•
Display Backlight			•
REL	Relative measurement		•
LBD	Low Battery Display		•
NCV	Non-Contact Voltage Detector		•
Wireless	APP connection		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	188mm×92mm×50mm/7.4"×3.6"×2.0"		
Product Weight	380g/0.83lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

- Accessories Included
- Test Leads
 - Multi-Function Socket
 - Battery and User's Manual

MASTECH®



MS8301D

SMART DIGITAL MULTIMETER



V DC 600V
AC 600V

MS8301D			
Specifications	Range	Resolution	Accuracy
DC Voltage	6V/60V/600V	0.01V/0.1V/1V	±(0.5%+3)
AC Voltage	6V/60V/600V	0.01V/0.1V/1V	±(0.8%+5)
Resistance	2kΩ/20kΩ/200kΩ/2MΩ	0.001kΩ/0.01kΩ/0.1kΩ/0.001MΩ	±(0.8%+3)
	10MΩ	0.01MΩ	±(1.0%+5)
Frequency	60Hz/600Hz/3kHz	0.1Hz/1Hz/10Hz	±(1.0%+5)
Duty Cycle	10% ~ 90%	1%	±2.0%
Features			
Display	Counts	6000	
Auto range	Auto	•	
APO	Auto Power Off	•	
Dual Display		•	
Continuity Buzzer	<40Ω	•	
Data Hold		•	
MAX/MIN		•	
Display Backlight		•	
LBD	Low Battery Display	•	
NCV	Non-Contact Voltage Detector	•	
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	150mm×74mm×48mm/5.9"×2.9"×1.7"		
Product Weight	220g/0.48lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

Accessories Included
Test Leads
Battery and User's Manual



• SMART



ACV



DCV

MS8333A

POCKET DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 600mA
AC 600mA

MS8333A			
Specifications	Range	Resolution	Accuracy
DC Voltage	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/0.1V	±(0.5%+3)
AC Voltage	6V/60V/600V	0.001V/0.01V/0.1V	±(1.0%+3)
DC Current	600μA/6000μA/60mA/600mA	0.1μA/1μA/0.01mA/0.1mA	±(1.0%+5)
AC Current	600μA/6000μA/60mA/600mA	0.1μA/1μA/0.01mA/0.1mA	±(1.8%+3)
Resistance	600Ω/6kΩ/60kΩ/600kΩ/6MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ/0.001MΩ	±(0.7%+3)
	60MΩ	0.01MΩ	±(2.0%+3)
Capacitance	6nF/60nF/600nF/6μF/60μF/600μF	0.001nF/0.01nF/0.1nF/1nF/10nF/100nF	±(3.0%+8)
Frequency	10Hz/100Hz/1000Hz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(1.5%+15)
Duty Cycle	0.5%~99.9%	0.1%	±(2.0%+5)
Features			
Display	Counts	6000	
Auto range	Auto	•	
APO	Auto Power Off	•	
True RMS	For AC Voltage & AC Current	•	
Continuity Buzzer	<50±20Ω	•	
Diode	Open Voltage	4V	
Data Hold		•	
Display Backlight		•	
LBD	Low Battery Display	•	
NCV	Non-Contact Voltage Detector	•	
Battery Tester	1.5V	•	
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	122mm×62mm×44mm/4.8"×2.44"×1.73"		
Product Weight	186g/0.4lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

Accessories Included
Battery and User's Manual

MASTECH®



M320

M320C / M300 / M300C

POCKET DIGITAL MULTIMETER



- Accessories Included
- Battery and User's manual



V DC 600V
AC 600V

A DC 400mA
AC 400mA

M300 M300C			
Specifications	Range	Resolution	Accuracy
DC Voltage	2V	1mV	±(0.5%+1)
	20V/200V/300V	10mV/100mV/1V	±(0.8%+1)
	20V/200V/600V	10mV/100mV/1V	±(0.8%+1)
AC Voltage	200V/300V	100mV/1V	±(1.2%+10)
	200V/600V	100mV/1V	±(1.2%+10)
DC Current	200mA	0.1mA	±(2.0%+2)
Resistance	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/100Ω/1kΩ	±(1.0%+2)
Features			
Display	counts		2000
Diode	Open Voltage		3.0V
Continuity Buzzer	<50Ω		•
LBD	Low Battery Display		•
General			
Power Supply	1×12V A23S Battery		
Product Size	120mm×70mm×18mm/4.7"×2.75"×0.7"		
Product Weight	110g/0.23lb		
Certificate	CE/ETL/RoHS		
Safety Rating	M300 - CAT III 300V/CAT II 600V		

M320 M320C			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V	0.1mV/1mV/10mV/100mV	±(0.5%+3)
	400mV/4V/40V	0.1mV/1mV/10mV	±(0.5%+3)
	300V	1V	±(0.8%+3)
	600V	1V	±(0.8%+3)
AC Voltage	4V/40V/400V	1mV/10mV/100mV	±(0.8%+4)
	4V/40V/300V	1mV/10mV/1V	±(0.8%+4)
	600V	1V	±(1.0%+4)
DC Current	40mA/400mA	0.01mA/0.1mA	±(2.0%+3)
AC Current	40mA/400mA	0.01mA/0.1mA	±(3.0%+4)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.0%+3)
	40MΩ	10kΩ	±(2.0%+4)
	4nF	1pF	±(5.0%+10)
Capacitance	40nF	10pF	±(4.0%+5)
	400nF/4μF/40μF/100μF	/0.1nF/1nF/10nF/0.1μF	±(3.0%+3)
Frequency	10Hz/100Hz/1kHz/10kHz/100kHz	0.01Hz/0.1Hz/1Hz/10Hz/0.1kHz	±(0.5%+3)
Features			
Display	counts		4000
Auto Power Off			•
Auto Ranging			•
Diode	Open Voltage		1.5V
Continuity Buzzer	<50±20Ω		•
Data Hold			•
LBD	Low Battery Display		•
General			
Power Supply	2×1.5V 357A(LR44) Batteries		
Product Size	120mm×70mm×18mm/4.7"×2.75"×0.7"		
Product Weight	110g/0.23lb		
Certificate	CE/ETL/RoHS		
Safety Rating	M320 - CAT III 300V/CAT II 600V		

MS8216

POCKET DIGITAL MULTIMETER



V DC 600V
AC 600V

MS8216			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/100mV/1V	±(0.7%+2)
AC Voltage	4V/40V/400V/600V	1mV/10mV/100mV/1V	±(0.8%+3)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ	±(1.2%+2)
	40MΩ	10kΩ	±(2.0%+5)
Capacitance	4nF/40nF/400nF/4μF/40μF/200μF	1pF/10pF/0.1nF/1nF/10nF/100nF	±(3.0%+3)
Frequency	9.999Hz	0.001Hz	±(2.0%+5)
	99.99Hz/999.9Hz/9.999kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
	99.99kHz/199.99kHz	10Hz/100Hz	±(2.0%+5)
	>200KHz	100Hz	Reference
Duty Cycle	0.1%~99.9%	0.1%	±3.0%
Features			
Display	counts		4000
Auto Ranging	Auto and Manual		•
APO	Auto Power Off		•
REL	Relative Measurement		•
Diode	Open Voltage		1.5V
Continuity Buzzer	<50±20Ω		•
LBD	Low Battery Display		•
Data Hold			•
General			
Power Supply	357A(LR44) Battery/2×1.5V Batteries		
Product Size	110mm×76mm×11mm/4.3"×3.07"×0.47"		
Product Weight	100g/0.22lb		
Certificate	RoHS		
Safety Rating	CAT II 600V/CAT III 300V		

MASTECH®



- Accessories Included
- Battery and User's manual



MS8223A MS8211 / MS8211D / MS8212A

PEN-TYPE DIGITAL MULTIMETER



MS8211D



V DC 600V
AC 600V

A DC 200mA
AC 200mA

		MS8211 MS8211D MS8212A MS8223A			
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/20mV/0.1V/1V	±(0.7%+2)		
	200mV/2V/20V/200V	0.1mV/1mV/20mV/0.1V	±(0.8%+3)		
AC Voltage	600V	1V	±(1.0%+3)		
	200Ω	0.1Ω	±(1.0%+3)		
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/0.1kΩ/1kΩ	±(1.0%+1)		
Resistance	20MΩ	0.01MΩ	±(1.0%+5)		
	20mA/200mA	20μA/0.1mA	±(1.5%+3)	±(1.5%+3)	±(1.5%+3)
DC Current	20mA/200mA	20μA/0.1mA	±(2.0%+3)	±(2.0%+3)	±(2.0%+3)
AC Current	20mA/200mA	20μA/0.1mA	±(2.0%+3)	±(2.0%+3)	±(2.0%+3)
Features					
Display	counts	2000			
Auto Ranging	Auto & Manual	•			
APO	Auto Power Off	•			
Diode	Open Voltage	1.5V			
MAX	Maximum Value Hold	•			
Data Hold		•			
LBD	Low Battery Display	•			
Continuity Buzzer		<50±20Ω	<50±20Ω	<50±20Ω	<50Ω
NCV	Detection: >50V AC	•	•	•	•
Logic Level Test	High / Low level	•	•	•	•
Retractable Tip	Retractable Tip for Safe Storage	•	•		
Work Light					•
Housing	Double Molding			•	•
General					
Power Supply	2×1.5V AAA Batteries				
Model number	MS8211/MS8211D	MS8212A	MS8223A		
Product Size	208mm×38mm×29mm/	238×43×29mm/	225×52×40mm		
Product Weight	110g/0.24lb	112g/0.28lb	138g/0.3lb		
Certificate	RoHS	CE/ETL/RoHS	CE/ETL/RoHS		
Safety Rating	CAT II 600V	CAT III 600V	CAT III 600V		

Accessories Included	
Test Leads	
Alligator Clips	
Battery and User's manual	

MS8217

DIGITAL MULTIMETER



V DC 1000V
AC 1000V

A DC 10A
AC 10A

		MS8217	
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV	0.1mV	±(1.0%+10)
	4V/40V/400V/1000V	1mV/10mV/100mV/1V	±(0.5%+3)
AC Voltage	400mV	0.1mV	±(3.0%+3)
	4V/40V/400V/1000V	1mV/10mV/100mV/1V	±(1.0%+3)
DC Current	400μA/4000μA/40mA/	0.1μA/1μA/10μA/	±(1.5%+3)
	400mA/4A/10A	0.1mA/1mA/10mA	±(1.5%+3)
AC Current	400μA/4000μA/40mA/	0.1μA/1μA/10μA/	±(1.5%+3)
	400mA/4A/10A	0.1mA/1mA/10mA	±(1.5%+3)
Resistance	400Ω	0.1Ω	±(0.5%+3)
	4kΩ/40kΩ/400kΩ/4MΩ	1Ω/10Ω/100Ω/1kΩ	±(0.5%+2)
	40MΩ	10kΩ	±(1.5%+3)
Capacitance	50nF	10pF	±(3.0%+10)
	500nF/5uF/50uF/100uF	100pF/1nF/10nF/100nF	±(3.0%+5)
Frequency	50Hz/500Hz/5kHz/	0.01Hz/0.1Hz/1Hz/	±(0.1%+3)
	50kHz/100kHz	10Hz/0.1kHz	±(0.1%+3)
Duty Cycle	0.1%~99%	0.10%	±(2.0%+5)
Temperature	-55°C~0°C	0.1°C	±(9.0%+2)
	1°C~400°C	0.1°C	±(2.0%+1)
	401°C~1000°C	1°C	±(2.0%)

Features	
Display	counts
Auto Ranging	Auto and Manual
APO	Auto Power Off
REL	Relative Measurement
Diode	Open Voltage
Continuity Buzzer	<50±20Ω
Data Hold	
LBD	Low Battery Display

General	
Power Supply	3×1.5 AAA Batteries
Product Size	185mm×87mm×53mm/7.28"×3.4"×2.04"
Product Weight	360g/0.79lb
Certificate	RoHS
Safety Rating	CAT II 1000V/CAT III 600V

Accessories Included	
Test Leads	
K type thermocouple	
Multi-Function Socket	
Battery and User's manual	

MASTECH®



MAS830

MAS830B / MAS830L / MAS830C / MAS830BC / MAS830LC

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A

Accessories Included
Test Leads
Battery and User's manual

			MAS830	MAS830B	MAS830L	MAS830C	MAS830BC	MAS830LC
Specifications	Range	Resolution	Accuracy					
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+3)					
	300V	1V				±(0.8%+5)		
	600V	1V	±(0.8%+5)					
AC Voltage	200V/300V	0.1V/1V				±(1.2%+10)		
	200V/600V	0.1V/1V	±(1.2%+10)					
DC Current	20μA	0.01μA	±(1.0%+3)					
	200μA/2mA	0.1μA/1μA	±(1.0%+3)					
	20mA	10μA	±(1.0%+5)					
	200mA	0.1mA	±(1.5%+5)					
	10A	10mA	±(3.0%+10)					
Resistance	200Ω	0.1Ω	±(0.8%+5)					
	2kΩ/20kΩ/200kΩ	1Ω/10Ω/0.1kΩ	±(0.8%+2)					
	2MΩ	1kΩ	±(1.0%+5)					
Features								
Display	counts		2000					
Diode	Open Voltage		3.0V					
Data Hold			●					
LBD	Low Battery Display		●					
Continuity Buzzer	<70 ±30Ω		●		●	●		●
Display Backlight					●			●
General								
Power Supply	1×9V 6F22 NEDA 1604 Battery							
Product Size	145mm×76mm×40mm/5.7"×3"×1.57"							
Product Weight	202g/0.44lb							
Certificate	CE/ETL/RoHS							
Safety Rating			CAT III 600V			CAT III 300V		

MAS838

MAS838C

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A

			MAS838	MAS838C
Specifications	Range	Resolution	Accuracy	
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+3)	
	300V	1V		±(0.8%+5)
	600V	1V	±(0.8%+5)	
AC Voltage	200V/300V	0.1V/1V	±(1.2%+10)	
	200V/600V	0.1V/1V	±(1.2%+10)	
DC Current	200µA/2mA	0.1µA/1µA	±(1.0%+3)	
	20mA	10µA	±(1.0%+5)	
	200mA	0.1mA	±(1.5%+5)	
	10A	10mA	±(3.0%+10)	
Resistance	200Ω	0.1Ω	±(0.8%+5)	
	2kΩ/20kΩ/200kΩ	1Ω/10Ω/0.1kΩ	±(0.8%+2)	
	2MΩ	1kΩ	±(1.0%+5)	
Temperature	-20°C~0°C	1°C	±(10%+2)	
	0°C~400°C	1°C	±(1.0%+2)	
	400°C~1000°C	1°C	±(2.0%)	
Features				
Display	counts		2000	
Diode	Open Voltage		3.0V	
Continuity Buzzer	<70 ±30kΩ		●	
Data Hold			●	
LBD	Low Battery Display		●	
General				
Power Supply	1×9V 6F22 NEDA 1604 Battery			
Product Size	145mm×76mm×40mm/5.7"×3"×1.57"			
Product Weight	202g/0.44lb			
Certificate	CE/ETL/RoHS			
Safety Rating			CAT III 600V	CAT III 300V

Accessories Included
Test Leads
K type thermocouple
Battery and User's manual

MASTECH®



MS8233A MS8233B / MS8233C

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A

			MS8233A	MS8233B	MS8233C
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+3)		
	600V	1V	±(0.5%+3)		
AC Voltage	200V	100mV	±(1.2%+10)		
	600V	1V	±(1.2%+10)		
DC Current	200µA/2000µA/20mA/200mA	0.1µA/1µA/10µA/0.1mA	±(1.0%+3)		
	10A	0.01A	±(3.0%+5)		
Resistance	200Ω/2kΩ/20kΩ/200kΩ	0.1Ω/1Ω/10Ω/0.1kΩ	±(0.8%+4)		
	2MΩ	1kΩ	±(0.8%+4)		
Temperature	-20°C~0°C / -4°F~32°F	1°C/1°F		±(10%+2)	
	0°C~400°C / 33°F~752°F	1°C/1°F		±(1%+3)	
	400°C~1000°C / 752°F~1832°F	1°C/1°F		±(2.0%)	
Features					
Display	counts		2000		
Diode	Open Voltage		3.0V		
Continuity Buzzer			<60Ω		
Data Hold			●		
LBD	Low Battery Display		●		
Display Backlight			●	●	
NCV	Non-contact Voltage Detection		●	●	
General					
Power Supply	1×9V 6F22 Battery				
Product Size	140mm×67mm×30mm/5.5"×2.6"×1.2"				
Product Weight	112g/0.25lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 600V				
Accessories Included					
Test Leads					
K type thermocouple (MS8233C)					
Battery and User's manual					



MS8233E MS8233D / MS8233Z

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8233D MS8233E MS8233Z			
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+2)
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(0.5%+2)
AC Voltage	600V	1V	±(0.8%+2)
	2V/20V/200V	1mV/10mV/0.1V	±(0.9%+3)
	4V/40V/400V	1mV/10mV/0.1V	±(0.8%+3)
DC Current	600V	1V	±(1.2%+3)
	200µA/2000µA/20mA/200mA	0.1µA/1µA/10µA/0.1mA	±(1.5%+4)
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.0%+3)
AC Current	10A	0.01A	±(3.0%+5)
	200µA/2000µA/20mA/200mA	0.1µA/1µA/10µA/0.1mA	±(1.5%+4)
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.2%+4)
Resistance	200Ω/2kΩ/20kΩ/200kΩ	0.1Ω/1Ω/10Ω/0.1kΩ	±(0.8%+2)
	2MΩ/20MΩ	1kΩ/20kΩ	±(1.0%+2)
	400Ω/4kΩ/40kΩ/400kΩ	0.1Ω/1Ω/10Ω/0.1kΩ	±(0.8%+2)
Capacitance	4MΩ/40MΩ	1kΩ/10kΩ	±(1.0%+2)
	4nF/40nF/400nF	1pF/10pF/0.1nF	±(3.0%+3)
Frequency	4µF/40µF/200µF	1nF/10nF/0.1µF	±(3.0%+3)
	0.1~10MHz	1Hz	±(1.5%+5)
Duty Cycle	0~20kHz	10Hz	±(1.5%+5)
Temperature	1%~99%	0.1%	±(1.0%)
	-20°C~0°C / -4°F~32°F	1°C/1°F	±(5.0%+3)
	0°C~400°C / 33°F~752°F	1°C/1°F	±(2.0%+3)
	400°C~1000°C / 752°F~1832°F	1°C/1°F	±(3.0%+3)
Features			
Display	counts	2000	4000
Autoranging	Auto & Manual	•	•
Diode	Open Voltage	1.5V	1.5V
Continuity Buzzer		<60Ω	<70Ω
Data Hold		•	•
APO	Auto Power Off	•	•
NCV	Non-contact Voltage Detection	•	•
MAX	Maximum Measurement	•	•
Display Backlight		•	•
LBD	Low Battery Display	•	•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	140mm×67mm×30mm/5.5"×2.6"×1.2"		
Product Weight	112g/0.25lb		
Certificate	MS8223E CE/ETL/RoHS		
Safety Rating	CAT II 600V / CAT III 600V / CAT II 600V		

Accessories Included	
Test Leads	
K type thermocouple (MS8233E/MS8233Z)	
Battery and User's manual	

MASTECH®



MS8238 MS8238G / MS8238A / MS8238B

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A

			MS8238	MS8238G	MS8238A	MS8238B
Specifications	Range	Resolution	Accuracy			
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+2)			
	600V	1V	±(0.8%+5)			
AC Voltage	200V/600V	0.1V/1V	±(1.0%+5)			
DC Current	2mA/20mA/200mA	1μA/10μA/0.1mA	±(0.8%+3)	±(0.8%+3)		
	200mA	0.1mA			±(0.8%+3)	±(0.8%+3)
	10A	10mA	±(2.5%+3)	±(2.5%+3)	±(2.5%+3)	±(1.2%+3)
AC Current	200mA	0.1mA			±(1.0%+3)	±(1.0%+3)
	10A	10mA			±(2.5%+3)	±(1.5%+3)
Resistance	200Ω/2kΩ/20kΩ	0.1Ω/1Ω/10Ω	±(0.8%+4)			
	200kΩ/2MΩ	0.1kΩ/1kΩ	±(0.8%+4)			
Features						
Display	counts		2000			
Diode	Open Voltage		3.0V			
Continuity Buzzer			<50Ω			
Data Hold			●			
LBD	Low Battery Display		●			
Battery Test	1.5V/9V/12V		●			
NCV	Non-contact voltage detection			●	●	●
General						
Power Supply	1×9V 6F22 NEDA 1604 Battery					
Product Size	148mm×73.5mm×50mm/5.8"×2.9"×1.96"					
Product Weight	232g/0.51lb					
Certificate	CE/ETL/RoHS					
Safety Rating	CAT III 600V					

Accessories Included
Test Leads
Battery and User's manual



MS8238C

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8238C			
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+3)
	600V	1V	±(0.8%+3)
AC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(0.5%+5)
	600V	1V	±(1.0%+5)
DC Current	200µA/2000µA/20mA	0.1µA/1µA/0.01mA	±(0.8%+3)
	200mA	0.1mA	±(0.8%+3)
	10A	10mA	±(1.0%+10)
AC Current	200µA/2000µA/20mA	0.1µA/1µA/0.01mA	±(1.0%+3)
	200mA	0.1mA	±(1.2%+3)
	10A	10mA	±(1.5%+10)
Resistance	200Ω/2kΩ/20kΩ	0.1Ω/1Ω/10Ω	±(0.8%+4)
	200kΩ/2MΩ	0.1kΩ/1kΩ	±(0.8%+4)
	20MΩ	0.01MΩ	±(1.0%+4)
Temperature	-20°C~750°C	1°C	±(2.0%+2)
	-4°F~1382°F	1°F	±(2.0%+4)
Features			
Display	counts	2000	
Diode	Open Voltage	1.5V	
Auto Ranging		●	
Continuity Buzzer		<50±20Ω	
Data Hold		●	
LBD	Low Battery Display	●	
Battery Test	1.5V/9V/12V	●	
NCV	Non-contact voltage detection	●	
APO	Auto power off	●	
General			
Power Supply	1×9V 6F22 NEDA 1604 Battery		
Product Size	148mm×73.5mm×50mm/5.8"×2.9"×1.96"		
Product Weight	232g/0.51lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

Accessories Included
Test Leads
K type thermocouple
Battery and User's manual

MASTECH®



MS8239A MS8239B / MS8239C

DIGITAL MULTIMETER



MS8239C



V DC 600V
AC 600V

A DC 10A
AC 10A

		MS8239A MS8239B MS8239C		
Specifications	Range	Resolution	Accuracy	
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+3)	±(0.5%+3)
	600V	1V	±(0.8%+3)	±(0.8%+3)
AC Voltage	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V		±(0.5%+3)
	200V/600V	0.1V/1V	±(1.2%+10)	±(1.2%+10)
DC Current	4V/40V/400V/600V	1mV/10mV/0.1V/1V		±(1.2%+5)
	20mA/200mA	0.01mA/0.1mA	±(1.0%+5)	
AC Current	200mA	0.1mA		±(1.0%+5)
	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA		±(1.0%+5)
Resistance	10A	0.01A	±(2.0%+10)	±(2.0%+10)
	200mA	0.1mA	±(1.2%+5)	
Capacitance	400μA/4000μA/40mA/400mA	0.1μA/1μA/0.01mA/0.1mA		±(1.2%+5)
	10A	0.01A	±(2.5%+10)	±(2.5%+10)
Frequency (V / A)	200Ω/2kΩ/20kΩ/200kΩ/2MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(0.8%+5)	±(0.8%+5)
	400Ω/4kΩ/40kΩ	0.1Ω/1Ω/10Ω		±(0.8%+5)
Frequency (Hz/ Duty)	5nF/50nF/500nF	1pF/10pF/0.1nF		±(3.0%+5)
	5μF/50μF/100μF	1nA/10nA/0.1μA		±(3.0%+5)
Duty Cycle	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/1Hz		±(1.5%+5)
	10Hz/100Hz/1000Hz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz		±(1.5%+5)
Temperature	100kHz/1000kHz/10MHz	10Hz/0.1kHz/1kHz		±(1.5%+5)
	0.1%~99%	0.1%		±(2.0%+5)
Features	-20°C~1000°C/ -4°F~1832°F	1°C/1°F		±(3.0%+3)
Display	Counts	2000	2000	4000
Auto Ranging	Auto & Manual			•
APO	Auto Power Off			•
Battery Tester	1.5V/9V/12V	•	•	•
Diode	Open Voltage	2.5V	2.5V	1.5V
Continuity Buzzer		<40Ω	<30Ω	<50±20Ω
Data Hold		•	•	•
Display Backlight				•
LBD	Low Battery Display	•	•	•
General				
Power Supply	2×1.5V AAA Batteries			
Product Size	150mm×74mm×41mm/5.9"×2.9"×1.6"			
Product Weight	202g/0.44lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CATIII 600V			

- Accessories Included
- Test Leads
 - K type thermocouple (MS8239C)
 - Battery and User's manual

MS8239D

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

		MS8239D	
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/100mV/100mV	±(0.7%+2)
AC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/100mV	±(0.8%+3)
DC Current	600V	100mV	±(1.0%+3)
AC Current	10A	0.01A	±(2.0%+10)
Resistance	10A	0.01A	±(3.0%+10)
DWELL Test	200Ω	0.1Ω	±(1.0%+3)
TACH Test	2kΩ/20kΩ/200kΩ/2MΩ	0.001kΩ/0.01kΩ/0.1kΩ/0.001MΩ	±(1.0%+1)
	20MΩ	0.01MΩ	±(1.0%+5)
	4CYL/6CYL/8CYL	0.1°	±(3.0°)
	4CYL/6CYL/8CYL	10RPM	±(3.0%+3)
Features			
Display	Counts	2000	
Auto ranging	Auto & Manual	•	
APO	Auto Power Off	•	
Diode	Open Voltage	2.7V	
Continuity Buzzer	<50Ω	•	
Data Hold		•	
MAX	Maximum Measurement	•	
Display backlight		•	
LBD	Low Battery Display	•	
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	150mm×74mm×41mm/5.9"×2.9"×1.6"		
Product Weight	202g/0.44lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

- Accessories Included
- Test Leads
 - Battery and User's manual



ENGINE ANALYZER

MS8321B MS8321A / MS8321C

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

			MS8321A	MS8321B	MS8321C
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.7%+1)		
	600V	1V	±(0.8%+2)		
AC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(0.8%+3)	±(0.8%+3)	
	200V	0.1V			±(1.2%+10)
	600V	1V	±(1.2%+3)		
DC Current	200μA/2mA/20mA	0.1μA/1μA/10μA	±(1.0%+3)		±(1.0%+3)
	2mA/20mA	1μA/10μA		±(1.0%+3)	
	200mA	0.1mA	±(1.5%+1)		±(1.5%+1)
	10A	0.01A		±(2.0%+5)	
AC Current	2mA/20mA	1μA/10μA	±(1.2%+5)		
	20mA	10μA		±(1.2%+5)	
	200mA	0.1mA	±(1.8%+5)		
	10A	0.01AV	±(3.0%+10)	±(3.0%+10)	
Resistance	200Ω	0.1Ω		±(1.0%+3)	
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/0.1kΩ/1kΩ		±(1.0%+1)	
	20MΩ	10kΩ	±(1.0%+5)	±(1.0%+5)	
Temperature	-20°C~0°C / -4°F~32°F	1°C / 1°F		±(10%+2)	
	1°C~400°C / 33°F~752°F	1°C / 1°F		±(1.0%+3)	
	401°C ~1000°C / 753°F~1832°F	1°C / 1°F		±(2.0%)	
Features					
Display	Counts		2000		
Manual Range			●		
APO	Auto Power Off		●		
Data Hold			●		
Diode	Open Voltage		3.0V		
Continuity Buzzer			<40Ω	<50Ω	<50Ω
LBD	Low Battery Display		●	●	●
Transistor hFE	0~1000		●		●
Battery Tester	1.5V/9V/12V			●	
General					
Power Supply	1×9V 6F22 Battery				
Product Size	158mm×74mm×36mm/5.8"×2.87"×1.5"				
Product Weight	220g/0.48lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 600V				

Accessories Included

Test Leads

K type thermocouple (MS8321B)

Battery and User's manual



MS8321E MS8321D / MS8321F

DIGITAL MULTIMETER



V DC 1000V
AC 750V

A DC 20A
AC 20A

			MS8321D	MS8321E	MS8321F
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.7%+1)		
	1000V	1V	±(0.8%+2)		
AC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(0.8%+3)	±(0.8%+3)	
	200V	0.1V			±(1.2%+10)
	750V	1V		±(1.2%+3)	
DC Current	200µA/2mA/20mA	0.1µA/1µA/10µA	±(1.0%+3)		±(1.0%+3)
	2mA/20mA	1µA/10µA		±(1.0%+3)	
	200mA	0.1mA	±(1.5%+1)		±(1.5%+1)
	20A	0.01A		±(2.0%+5)	
AC Current	2mA/20mA	1µA/10µA	±(1.2%+5)		
	20mA	10µA		±(1.2%+5)	
	200mA	0.1mA	±(1.8%+5)		
	20A	0.01A	±(3.0%+10)	±(3.0%+10)	
Resistance	200Ω	0.1Ω		±(1.0%+3)	
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/0.1kΩ/1kΩ		±(1.0%+1)	
	20MΩ	10kMΩ	±(1.0%+5)	±(1.0%+5)	
Temperature	-20°C~0°C / -4°F~32°F	1°C / 1°F		±(10%+2)	
	1°C~400°C / 33°F~752°F	1°C / 1°F		±(1.0%+3)	
	401°C ~1000°C / 753°F~1832°F	1°C / 1°F		±(2.0%)	
Features					
Display	Counts		2000		
Manual Range			●		
AP0	Auto Power Off		●		
Data Hold			●		
LBD	Low Battery Display		●		
Diode	Open Voltage		3.0V		
Continuity Buzzer			<60Ω	<60Ω	<50Ω
Transistor hFE	0~1000		●		●
ECBE	NPN/PNP		●		●
Battery Tester	1.5V/9V/12V			●	
General					
Power Supply	1×9V 6F22 Battery				
Product Size	158mm×74mm×36mm/5.8"×2.87"×1.5"				
Product Weight	220g/0.48lb				
Certificate	RoHS				
Safety Rating	CAT II 1000V/CAT III 600V				

Accessories Included

Test Leads

K type thermocouple (MS8321E)

Battery and User's manual

MASTECH®



MY65

MY60 / MY61 / MY62 / MY63 / MY64

DIGITAL MULTIMETER



V DC 1000V
AC 750V
A DC 10A
AC 10A

MY65

Specifications	Range	Resolution	Accuracy
DC Voltage	200mV	0.01mV	±(0.05%+3)
	2V/20V/200V	0.1mV/1mV/10mV	±(0.1%+3)
	1000V	0.1V	±(0.15%+3)
AC Voltage	2V	0.1mV	±(0.5%+3)
	20V/200V	1mV/10mV	±(0.8%+10)
	750V	0.1V	±(1.0%+15)
DC current	2mA/20mA	0.1μA/1μA	±(0.5%+5)
	200mA	10μA	±(0.8%+5)
	10A	1mA	±(2.0%+10)
AC current	2mA/20mA	0.1μA/1μA	±(0.8%+10)
	200mA	10μA	±(1.2%+10)
	10A	1mA	±(2.5%+10)
Resistance	200Ω	0.01Ω	±(0.5%+10)
	2kΩ	0.1Ω	±(0.3%+3)
	20kΩ/200kΩ/2MΩ/20MΩ	1Ω/10Ω/100Ω/1kΩ	±(0.3%+1)
	200MΩ	10kΩ	±(5.0%+10)
Capacitance	20nF/200nF/2μF/20μF/100μF	1pF/10pF/0.1nF/1nF/10nF	±(4.0%+20)
Frequency	20kHz	1Hz	±(1.5%+5)
Features			
Display	counts	20000	
APO	Auto Power Off	●	
Transistor hFE	0~1000	●	
Diode		3.0V	
Continuity Buzzer		<70Ω	
Data Hold		●	
LBD	Low Battery Display	●	
General			
Power Supply	1×9V 6F22 Battery		
Product Size	195mm×95mm×55mm/7.67"×3.74"×2.16"		
Product Weight	366g/0.8lb		
Certificate	RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		

Accessories Included	
Test Leads	
K type thermocouple (MY62 / MY64)	
Multi-Function Socket	
Battery and User's manual	



MY65

MY60 / MY61 / MY62 / MY63 / MY64

MASTECH®

DIGITAL MULTIMETER

			MY60	MY61	MY62	MY63	MY64
Specifications	Range	Resolution	Accuracy				
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/100mV	±(0.5%+2)	±(0.5%+2)	±(0.5%+2)	±(0.5%+2)	±(0.5%+2)
	1000V	1V	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)
AC Voltage	200mV	100μV	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)		
	2V	1mV	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)
	20V/200V	10mV/100mV	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)
	750V	1V	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)
DC Current	20μA	0.01μA	±(2.0%+5)				
	200μA/2mA/20mA	0.1μA/1μA/10μA	±(0.8%+1)				
	2mA/20mA	1μA/10μA		±(0.8%+1)	±(0.8%+1)	±(0.8%+1)	±(0.8%+1)
	200mA	0.1mA	±(1.5%+1)	±(1.5%+1)	±(1.5%+1)	±(1.5%+1)	±(1.5%+1)
	10A	10mA	±(2.0%+5)	±(2.0%+5)	±(2.0%+5)	±(2.0%+5)	±(2.0%+5)
AC Current	20μA	0.01μA	±(2.0%+5)				
	200μA	0.1μA	±(1.0%+5)				
	2mA	1μA	±(1.0%+5)	±(1.0%+5)			
	20mA	10μA	±(1.0%+5)	±(1.0%+5)	±(1.0%+5)	±(1.0%+5)	±(1.0%+5)
	200mA	0.1mA	±(1.8%+5)	±(1.8%+5)	±(1.8%+5)	±(1.8%+5)	±(1.8%+5)
	10A	10mA	±(3.0%+7)	±(3.0%+7)	±(3.0%+7)	±(3.0%+7)	±(3.0%+7)
Resistance	200Ω	0.1Ω	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/100Ω/1kΩ	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)
	20MΩ	10kΩ	±(1.0%+2)	±(1.0%+2)	±(1.0%+2)	±(1.0%+2)	±(1.0%+2)
	200MΩ	100kΩ	±(6.0%+10)	±(6.0%+10)	±(6.0%+10)	±(6.0%+10)	±(6.0%+10)
Capacitance	2nF/20nF/200nF/2μF	1pF/10pF/0.1nF/1nF		±(4.0%+3)	±(4.0%+3)	±(4.0%+3)	±(4.0%+3)
	100μF	100nF		±(6.0%+10)	±(6.0%+10)	±(6.0%+10)	±(6.0%+10)
Temperature	-20°C~0°C	1°C			±(5.0%+4)		±(5.0%+4)
	1°C~400°C	1°C			±(2.0%+3)		±(2.0%+3)
	401°C~1000°C	1°C			±(2.0%+5)		±(2.0%+5)
Frequency	20kHz	10Hz				±(2.0%+5)	±(2.0%+5)
	2kHz	1Hz				±(1.5%+5)	
Features							
Display	counts		2000				
APO	Auto Power Off		●				
Transistor hFE	0~1000		●				
Diode	Open Voltage		3.0V				
Continuity Buzzer	<50Ω		●				
Data Hold			●				
LBD	Low Battery Display		●				
General							
Power Supply	1×9V 6F22 Battery						
Product Size	195mm×95mm×55mm/7.67"×3.74"×2.16"						
Product Weight	366g/0.8lb						
Certificate	RoHS						
Safety Rating	CAT II 1000V/CAT III 600V						

MY74

MY70 / MY74B

DIGITAL MULTIMETER



V DC 600V
AC 600V
A DC 10A
AC 10A

			MY70	MY74	MY74B
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/0.1V	±(0.5%+2)	±(0.5%+2)	
	600V	1V	±(0.8%+2)	±(0.8%+2)	
AC Voltage	200mV	0.1mV	±(1.2%+3)		
	2V/20V/200V	1mV/10mV/0.1V	±(0.8%+3)	±(0.8%+3)	
	600V	1V	±(1.2%+3)	±(1.2%+3)	
DC Current	20μA	0.01μA	±(2.0%+5)		±(2.0%+5)
	200μA	0.1μA	±(0.8%+1)		
	2mA	1μA	±(0.8%+1)	±(0.8%+1)	
	20mA	10μA	±(0.8%+1)	±(0.8%+1)	
	200mA	0.1mA	±(1.5%+1)	±(1.5%+1)	
	10A	0.01A	±(2.0%+5)	±(2.0%+5)	
AC Current	20μA	0.01μA	±(2.0%+5)		
	200μA	0.1μA	±(1.0%+5)		
	2mA	1μA	±(1.0%+5)		
	20mA	10μA	±(1.0%+5)	±(1.0%+5)	
	200mA	0.1mA	±(1.8%+5)	±(1.8%+5)	
	10A	0.01A	±(3.0%+7)	±(3.0%+7)	
Resistance	200Ω	0.1Ω	±(0.8%+3)	±(0.8%+3)	
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/0.1kΩ/1kΩ	±(0.8%+2)	±(0.8%+2)	
	20MΩ	10kΩ	±(1.0%+2)	±(1.0%+2)	
	200MΩ	0.1MΩ	±(6.0%+10)	±(6.0%+10)	
Capacitance	2nF/20nF/200nF/2μF	1pF/10pF/0.1nF/1nF		±(4.0%+3)	
	100μF	0.1μF		±(6.0%+10)	
Frequency	20kHz	0.01kHz		±(2.0%+5)	
Temperature	-20°C~0°C	1°C		±(5.0%+4)	
	1°C~400°C	1°C		±(2.0%+3)	
	401°C~1000°C	1°C		±(2.0%+5)	
Features					
Display	counts		2000		
APO	Auto Power Off		●		
Transistor hFE	0~1000		●		
Diode	Open Voltage		3.0V		
Continuity Buzzer	<50Ω		●		
Data Hold			●		
LBD	Low Battery Display		●		
General					
Power Supply	1×9V 6F22 Battery				
Product Size	188mm×93mm×50mm/7.4"×3.7"×1.96"				
Product Weight	380g/0.84lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 600V				

Accessories Included
Test Leads
K type thermocouple (MY74 / MY74B)
Multi-Function Socket
Battery and User's manual



MY78

MY75

DIGITAL MULTIMETER



V DC 600V
AC 600V
A DC 10A
AC 10A

			MY75	MY78
Specifications	Range	Resolution	Accuracy	
DC Voltage	200 mV	0.01mV	±(0.05%+3)	
	2V/20V/200V	0.1mV/1mV/10mV	±(0.1%+3)	
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V		±(0.7%+2)
	600V	0.1V/1V	±(0.15%+3)	±(0.8%+2)
AC Voltage	2V	0.1Vm	±(0.5%+3)	
	20V/200V	1mV/10mV	±(0.8%+10)	
	400 mV	0.1mV		±(3.0%+3)
	4V/40V/400V	1mV/10mV/0.1V		±(0.8%+3)
	600V	0.1V/1V	±(1.0%+15)	±(1.2%+3)
DC Current	2mA/20mA	0.1μA/1μA	±(0.5%+50)	
	200mA	10μA	±(0.8%+50)	
	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA		±(1.2%+3)
	10A	1mA/10mA	±(2.0%+10)	±(2.0%+5)
AC Current	2mA/20mA	0.1μA/1μA	±(0.8%+50)	
	200mA	10μA	±(1.2%+50)	
	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA		±(1.5%+5)
	10A	1mA/10mA	±(2.5%+10)	±(3.0%+7)
Resistance	200Ω	0.01Ω	±(0.5%+10)	
	2kΩ	0.1Ω	±(0.3%+3)	
	20kΩ/200kΩ/2MΩ/20MΩ	1Ω/10Ω/0.1kΩ/1kΩ	±(0.3%+1)	
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ		±(1.2%+2)
	200MΩ	0.01MΩ	±(5.0%+10)	
Capacitance	40MΩ	0.01MΩ		±(2.0%+5)
	2μF/20μF/100μF/20nF/200nF	0.1nF/1nF/10nF/1pF/10pF	±(4.0%+20)	
	4nF	1pF		±(4.0%+25)
Frequency	40nF/400nF/4μF/40μF/200μF	0.01nF/0.1nF/1nF/10nF/0.1μF		±(4.0%+15)
	20kHz	1Hz	±(1.5%+5)	
	10Hz/100Hz/1kHz	0.01Hz/0.01Hz/0.1Hz		±(2.0%+5)
	10kHz/100kHz/200kHz	1Hz/10Hz/0.1kHz		±(2.0%+5)
	>200kHz	0.1kHz		Reference
DC Current (for Clamp Meter)	40A	1A/1mV		±(0.8%+3)
	400A	1A/1mV		±(0.8%+3)
AC Current (for Clamp Meter)	40A	1A/1mV		±(1.0%+3)
	400A	1A/1mV		±(1.0%+3)
Duty Cycle	5% ~ 95%	0.1%		±(2.0%+2)
Features				
Display	counts		20000	4000
Auto Ranging	Auto & Manual			●
REL	Relative Measurement			●
Diode	Open Voltage		3.0V	1.5V
Continuity Buzzer			<60Ω	<50±20Ω
Data Hold				●
APO	Auto Power Off			●
Transistor hFE	0~1000			●
LBD	Low Battery Display			●
General				
Power Supply	1×9V 6F22 Battery			
Product Size	MY75 188mm×93mm×50mm/7.4"×3.7"×1.96" ; MY78 189mm×91mm×31.5mm/7.67"×3.6"×1.24"			
Product Weight	MY75 380g/0.84lb ; MY78 420g/0.92lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 600V			

MASTECH®



Accessories Included
Test Leads
Multi-Function Socket
Battery and User's manual



MY75

MS8360C

MS8360E

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

		MS8360C		MS8360E	
Specifications	Range	Resolution	Accuracy		
DC Voltage	200mV/2V/20V/200V	0.1mV/1mV/10mV/100mV	±(0.5%+2)		
	600V	1V	±(0.8%+2)		
AC Voltage	2V/20V/200V	1mV/10mV/100mV	±(0.8%+5)		
	600V	1V	±(1.2%+5)	±(1.2%+3)	
DC Current	20mA	0.01mA	±(1.0%+1)		
	200mA	0.1mA	±(1.0%+1)		
	10A	10mA	±(1.5%+1)		
AC Current	20mA	0.01mA	±(2.0%+5)		
	200mA	0.1mA	±(1.5%+5)	±(1.8%+3)	
	10A	10mA	±(3.0%+5)	±(3.0%+7)	
Resistance	200Ω	0.1Ω	±(0.8%+3)		
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/100Ω/1kΩ	±(0.8%+5)		
	20MΩ	10kΩ	±(1.0%+2)		
Capacitance	200MΩ	0.1MΩ	±(5.0%+10)		
	20nF/200nF/2μF	0.01nF/0.1nF/0.01μF	±(5.0%+5)		
	200μF	0.1μF	±(4.0%+3)	±(4.0%+5)	
Frequency	20kHz	1Hz	±(5.0%+10)		
Temperature	-20°C~0°C	1°C	±(3.0%+5)		
	1°C~400°C/	1°C	±(5.0%+4)		
	401°C~1000°C	1°C	±(2.0%+2)		
	--4°F~32°F	1°F	±(2.0%+2)		
	33°F~752°F	1°F	±(5.0%+7)		
Inductance	753°F~1832°F	1°F	±(2.0%+4)		
	20mH/200mH/2H/20H	0.01mH/0.1mH/1mH/10mH	±(2.0%+4)		
Features					
Display	counts		2000		
APO	Auto Power Off		●		
NCV	Non-Contact Voltage Detector		●		
Transistor hFE	0~1000		●		
Diode	Open Voltage		3.0V		
Continuity Buzzer	<50Ω		●		
Data Hold			●		
Display Backlight			●		
LBD	Low Battery Display		●		
General					
Power Supply	1×9V 6F22 Battery				
Product Size	188mm×92mm×50mm/7.4"×3.6"×2.0"				
Product Weight	380g/0.83lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 600V				

Accessories Included

Test Leads
K type thermocouple (MS8360C)
Multi-Function Socket
Battery and User's manual



MS8360G

MS8360F

DIGITAL MULTIMETER



V DC 600V
AC 600V

A DC 10A
AC 10A

			MS8360F	MS8360G
Specifications	Range	Resolution	Accuracy	
DC Voltage	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(0.5%+2)	±(0.5%+2)
	600V	1V	±(0.8%+5)	±(0.8%+2)
AC Voltage	400mV	0.1mV	±(1.2%+20)	±(2.0%+3)
	4V/40V/400V	1mV/10mV/0.1V	±(0.8%+3)	±(0.8%+3)
	600V	1V	±(1.0%+5)	±(1.0%+3)
DC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA	±(0.8%+2)	±(0.8%+2)
	10A	10mA	±(1.2%+2)	
	4A/10A	1mA/10mA		±(1.2%+2)
AC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA	±(1.5%+2)	±(1.5%+2)
	10A	10mA	±(2.0%+2)	
	4A/10A	1mA/10mA		±(2.0%+2)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.0%+3)	±(1.0%+3)
	40MΩ	10kΩ	±(1.2%+15)	±(1.2%+15)
Capacitance	5nF/50nF/500nF	1pF/10pF/0.1nF	±(4.0%+15)	
	5μF/50μF/200μF	1nF/10nF/1μF	±(4.0%+15)	
	40nF/400nF/4μF	10pF/0.1nF/1nF		±(3.0%+5)
	40μF/400μF/4000μF	40nF/0.1μF/1μF		±(3.0%+5)
Frequency	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(4.0%+15)	±(0.5%+2)
	100kHz/1MHz/10MHz	10Hz/0.1kHz/1kHz	±(4.0%+15)	±(0.5%+2)
Duty Cycle	1%~99%	0.1%	±(2.0%+5)	±(2.0%+5)
Temperature	-20°C~0°C	1°C		±(5.0%+4)
	1°C~400°C/	1°C		±(1.0%+3)
	401°C~1000°C	1°C		±(2.0%+2)
	--4°F~32°F	1°F		±(5.0%+7)
	33°F~752°F	1°F		±(2.0%+4)
	753°F~1832°F	1°F		±(2.0%+4)
Features				
Display	counts		4000	
Auto Ranging	Auto and Manual		●	
APO	Auto Power Off		●	
REL	Relative Measurement		●	
NCV	Non-Contact Voltage Detector		●	
Transistor hFE	0~1000		●	
Diode	Open Voltage		1.5V	3.0V
Continuity Buzzer	<50±20Ω		●	
Data Hold			●	
Display Backlight			●	
LBD	Low Battery Display		●	
MAX/MIN				●
Bar Graph				●
General				
Power Supply	1×9V 6F22 Battery			
Product Size	188mm×92mm×50mm/7.4"×3.6"×2.0"			
Product Weight	380g/0.83lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 600V			

MASTECH®



Accessories Included

Test Leads
K type thermocouple (MS8360G)
Multi-Function Socket
Battery and User's manual



MS8250D


MS8250A / MS8250B

DIGITAL MULTIMETER



V	DC	1000V
	AC	1000V
A	DC	10A
	AC	10A

► True RMS Characteristics



- For non-sinusoidal signal measurement, the meter provides more accurate measurement than the traditional averaging method.
- If in AC current mode, the meter may display a random reading between 1 and 50 when the input is not active. This will not affect the accuracy if measurement.
- True RMS requires a minimum input level, AC current or voltage should be 2%~100% of the maximum level.

Accessories Included

Test leads

USB interface cable (MS8250B/MS8250D)

Software CD (MS8250B/MS8250D)

Battery and User's manual



MS8250D

MS8250A / MS8250B

DIGITAL MULTIMETER

MASTECH®

Specifications	Range	Resolution	MS8250A	MS8250B	MS8250D
			Accuracy		
DC Voltage	400mV	0.1mV	±(0.8%+3)		
	4V/40V/400V/600V	1mV/10mV/0.1V/1V	±(0.5%+5)		
	660mV	0.1mV			±(0.8%+3)
	6.6V/66V/660V/1000V	1mV/10mV/0.1V/1V			±(0.5%+5)
AC Voltage	400mV	0.1mV	±(1.0%+5)		
	4V/40V/400V	1mV/10mV/0.1V	±(0.8%+5)		
	600V	1V	±(1.2%+3)		
	660mV	0.1mV			±(1.5%+5)
	6.6V/66V	1mV/10mV			±(1.2%+5)
DC Current	660V/1000V	0.1V/1V			±(1.0%+3)
	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA	±(0.8%+2)		
	660μA/6600μA/66mA/660mA	0.1μA/1μA/10μA/0.1mA			±(1.0%+5)
	10A	10mA	±(2.0%+5)		±(2.0%+5)
AC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA	±(1.5%+2)		
	660μA/6600μA/66mA/660mA	0.1μA/1μA/10μA/0.1mA			±(1.5%+5)
	10A	10mA	±(3.0%+5)		±(3.0%+5)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/4kΩ	±(1.0%+5)		
	40MΩ	10kΩ	±(1.2%+15)		
	660Ω/6.6kΩ/66kΩ/660kΩ/6.6MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ			±(0.8%+5)
	66MΩ	10kΩ			±(1.5%+5)
Capacitance	40nF/400nF/4μF/40μF/100μF	10pF/0.1nF/1nF/10nF/0.1μF	±(3.0%+5)		
	6.6nF	1pF			±(4.0%+5)
	66nF/660nF/6.6μF/66μF/660μF	10pF/0.1nF/1nF/10nF/0.1μF			±(3.0%+3)
	6.6mF/66mF	1μF/10μF			±(4.0%+5)
Frequency	5Hz/50Hz/500Hz/5kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(0.5%+2)		
	50kHz/500kHz/5MHz	10Hz/0.1kHz/1kHz	±(0.5%+2)		
	66Hz/660Hz/6.6kHz/66kHz	0.01Hz/0.1Hz/1Hz/10Hz			±(1.5%+5)
	660kHz/6.6MHz/66MHz	0.1kHz/1kHz/10kHz			±(1.5%+5)
Duty Cycle	0.1%~99.9%	0.1%	±(2.0%+5)		±(2.0%+5)
Features					
Display	counts		4000		6600
Auto Ranging			•		•
Manual Ranging			•		•
APO	Auto Power Off		•		•
REL	Relative Measurement		•		•
True RMS	True Root Mean Square				•
NCV	Non-Contact Voltage Detector		•		•
Diode	Open Voltage		1.5V		3.2V
Continuity Buzzer			<50±20Ω		<50Ω
MAX/MIN					•
Bar Graph					•
Data Hold			•		•
LBD	Low Battery Display		•		•
Display Backlight			•		•
USB Interface	Windows OS			•	•
General					
Power Supply	1×9V 6F22 Battery				
Product Size	175mm×86mm×52mm/6.89"×3.38"×2.04"				
Product Weight	372g/0.82lb				
Certificate	CE/ETL/RoHS				
Safety Rating	MS8250A	MS8250B	MS8250D		
	CAT IV 600V	CAT IV 600V	CAT III 1000V/CAT IV 600V		

MS8251B

MS8251A / MS8251C

DIGITAL MULTIMETER



V	DC	1000V
	AC	1000V
A	DC	10A
	AC	10A

► True RMS Characteristics



- For non-sinusoidal signal measurement, the meter provides more accurate measurement than the traditional averaging method.
- If in AC current mode, the meter may display a random reading between 1 and 50 when the input is not active. This will not affect the accuracy if measurement.
- True RMS requires a minimum input level, AC current or voltage should be 2%~100% of the maximum level.

► Dual Impedance Characteristics



- Normal impedance (10M) with normal testing capabilities.
- Low impedance Lo-Z (400kΩ) for testing where “ghost voltage” may be present.
- Ghost voltage can occur when power supply conductors and adjacent unused conductors create a capacitance coupling between conductors. If this possibility exists or when testing for the presence of voltage, use the Lo-Z mode to switch to the low impedance setting to remove the ghost voltages during measurement.

Accessories Included

Test leads

K type thermocouple

Multi-Function Socket

Carry bag

Battery and User's manual



MS8251B

MS8251A / MS8251C

DIGITAL MULTIMETER

MASTECH®

Specifications	Range	Resolution	MS8251A	MS8251B	MS8251C
			Accuracy		
DC Voltage	400mV	0.1mV			±(0.8%+3)
	4V/40V/400V	1mV/10mV/0.1V			±(0.5%+5)
	1000V	1V			±(0.8%+3)
	660mV	0.1mV	±(0.8%+3)		
	6.6V/66V/660V	1mV/10mV/0.1V	±(0.5%+5)		
	1000V	1V	±(0.8%+3)		
AC Voltage	400mV(40~60Hz)	0.1mV			±(1.5%+5)
	4V/40V(40~400Hz)	1mV/10mV			±(1.2%+5)
	400V/1000V(40~400Hz)	0.1V/1V			±(1.0%+3)
	660mV(40~60Hz)	0.1mV	±(1.5%+5)		
	6.6V/66V(40~400Hz)	1mV/10mV	±(1.2%+5)		
	660V/1000V(40~400Hz)	0.1V/1V	±(1.0%+3)		
DC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA			±(1.0%+5)
	660μA/6600μA/66mA/660mA	0.1μA/1μA/10μA/0.1mA	±(1.0%+5)		
	10A	10mA	±(2.0%+5)		±(2.0%+5)
AC Current	400μA/4000μA/40mA/400mA	0.1μA/1μA/10μA/0.1mA			±(1.5%+5)
	660μA/6600μA/66mA/660mA	0.1μA/1μA/10μA/0.1mA	±(1.5%+5)		
	10A	10mA	±(3.0%+5)		±(3.0%+5)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ			±(0.8%+5)
	40MΩ	0.1MΩ			±(1.5%+5)
	660Ω/6.6kΩ/66kΩ/660kΩ/6.6MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ	±(0.8%+5)		
	66MΩ	0.1MΩ	±(1.5%+5)		
Capacitance	4nF	1pF			±(4.0%+5)
	40nF/400nF/4μF/40μF/400μF	40pF/0.1nF/1nF/10nF/0.1μF			±(3.0%+3)
	4mF/40mF	1μF/10μF			±(4.0%+5)
	6.6nF	1pF	±(4.0%+5)		
	66nF/660nF/6.6μF/66μF/660μF	10pF/0.1nF/1nF/10nF/0.1μF	±(3.0%+3)		
Frequency (V Position)	40Hz/400Hz/4kHz/10kHz	0.01Hz/0.1Hz/1Hz/10Hz			±(1.5%+5)
	66Hz/660Hz/6.6kHz/10kHz	0.01Hz/0.1Hz/1Hz/10Hz	±(1.5%+5)		
	40Hz/400Hz/4kHz/40kHz/400kHz/4MHz/40MHz	0.01Hz/0.1Hz/1Hz/10Hz/0.1kHz/1kHz/10kHz			±(1.5%+5)
Frequency (Hz Position)	66Hz/660Hz/6.6kHz/66kHz/660kHz/6.6MHz/66MHz	0.01Hz/0.1Hz/1Hz/10Hz/0.1kHz/1kHz/10kHz	±(1.5%+5)		
Duty Cycle	1%~99.9%	0.1%	±(2.0%)		±(2.0%)
Temperature	0~1000°C/32~1832°F	1°C/1°F	±(1.0%+3)		±(1.0%+3)
Features					
Display	counts		6600		4000
Auto Ranging			•		•
Manual Ranging			•		•
APO	Auto Power Off		•		•
REL	Relative Measurement		•		•
NCV	Non-Contact Voltage Detector		•		•
Diode	Open Voltage		3.2V		3.2V
Continuity Buzzer	<50Ω		•		•
MAX/MIN			•		•
Data Hold			•		•
LBD	Low Battery Display		•		•
Display Backlight			•		•
True RMS	True Root Mean Square			•	•
Low Z	Low Impedance Input Mode			•	
General					
Power Supply	1×9V 6F22 Battery				
Product Size	175mm×85mm×52mm/6.9"×3.3"×2.1"				
Product Weight	420g/0.92lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 1000V/CAT IV 600V				

MS8253A

MS8253D

DIGITAL MULTIMETER



V	DC	1000V
	AC	1000V
A	DC	10A
	AC	10A

- Accessories Included
- Test leads
 - USB interface cable (MS8253D)
 - Software CD (MS8253D)
 - Battery and User's manual



MS8253A MS8253D

Specifications	Ranges	Resolution	Accuracy
DC Voltage	660mV	0.1mV	±(0.8%+3)
	6.6V/66V/660V/1000V	0.001V/0.01V/0.1V/1V	±(0.5%+5)
AC Voltage	660mV	0.1mV	±(1.5%+5)
	6.6V/66V	0.001V/0.01V	±(1.2%+5)
	660V/1000V	0.1V/1V	±(1.0%+3)
DC Current	660uA/6600uA/66mA/660mA	0.1uA/1uA/0.01mA/0.1mA	±(1.0%+5)
	10A	0.01A	±(2.0%+5)
AC Current	660uA/6600uA/66mA/660mA	0.1uA/1uA/0.01mA/0.1mA	±(1.5%+5)
	10A	0.01A	±(3.0%+5)
Resistance	660Ω/6.6kΩ/66kΩ/	0.1Ω/0.001kΩ/0.01kΩ/	±(0.8%+5)
	660kΩ/6.6MΩ	0.1kΩ/0.001MΩ	
	66MΩ	0.01MΩ	±(1.5%+5)
Capacitance	6.6nF	0.001nF	±(4.0%+5)
	66nF/660nF/6.6uF/	0.01nF/0.1nF/0.001uF/	±(3.0%+3)
	66uF/660uF	0.01uF/0.1uF	
	6.6mF/66mF	0.001mF/0.01mF	±(4.0%+5)
Frequency (V)	66Hz/660Hz/6.6kHz/10kHz	0.01Hz/0.1Hz/0.001kHz/0.01kHz	±(1.5%+5)
	66Hz/660Hz/6.6kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
Frequency (Hz/Duty)	66KHz/660KHz/	0.01kHz/0.1kHz/	±(1.5%+5)
	6.6MHz/66MHz	0.001MHz/0.01MHz	
Duty Cycle	1-99%	0.1%	±(2.0%+5)
Features			
Display	Counts	6600	
Auto Range		●	
Manual Range		●	
APO	Auto Power Off	●	
REL	Relative Measurement	●	
True RMS	True Root Mean Square	●	
NCV	Non-Contact Voltage Deceptor	●	
Diode	Open Voltage	3.2V	
Continuity	<50Ω	●	
Max/Min		●	
Data Hold		●	
LBD	Low Battery Display	●	
Display Backlight		●	
NCV light		●	
Bar Graph		●	
USB Interface (windows OS)			●
General			
Power Supply	1×9V 6F22 Battery		
Product Size	179mm×86mm×52.1mm		
Product Weight	MS8253A : 398g / MS8253B : 406g		
Certification	CE/ETL/RoHS		
Safety Rating	CAT III 1000V/CAT IV 600V		

MS8236

MS8235

DIGITAL MULTIMETER with Lan/Phone/Tone tester



V	DC	600V
	AC	600V
A	DC	10A
	AC	10A

MS8235 MS8236

Specifications	Range	Resolution	Accuracy	
DC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/100mV/1V	±(0.5%+5)	
AC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/100mV/1V	±(0.8%+5)	
DC Current	200μA/2000μA/20mA/200mA	0.1μA/1μA/10μA/0.1mA	±(1.2%+5)	
	2A/10A	1mA/10mA	±(2.0%+10)	
AC Current	200μA/2000μA/20mA/200mA	0.1μA/1μA/10μA/0.1mA	±(1.5%+5)	
	2A/10A	1mA/10mA	±(3.0%+10)	
Resistance	200Ω/2kΩ/20kΩ/200kΩ	0.1Ω/1Ω/10kΩ/100Ω	±(1.0%+5)	
	2MΩ/20MΩ	1kΩ/10kΩ	±(1.5%+5)	
Frequency	20kHz	10Hz	±(1.5%+5)	
Features				
Display	counts		2000	
Auto Ranging	Auto & Manual		●	
APO	Auto Power Off		●	
NCV	Non-Contact Voltage Detector		●	
Diode	Open Voltage		1.7V	
Continuity Buzzer	<70Ω		●	
MAX	Maximum Measurement		●	
Data Hold			●	
LBD	Low Battery Display		●	
Display Backlight			●	
Network Cable Check	-Test for open circuits, shorts, miswires, reversals, split pairs, shield detection. -Main unit and one remote allow one person testing of T568A, T568B, 10Base-T. -Debug mode for detailed fault identification result.		●	
Phone Check	-Identify the state in the working telephone line: Busy, Ringing or Clear			●
Tone	-Judge the continuity of cables or wires. -Track the cables or wires and diagnose the break point.			●
General				
Model Number	MS8235		MS8236 & MS6812R	
Power Supply	1×9V 6F22 Battery		2×9V 6F22 Batteries	
Product Size	195mm×92mm×55mm/7.7"×3.6"×2.2"		195mm×92mm×55mm/7.7"×3.6"×2.2" 238mm×43mm×26mm/9.4"×1.7"×1.0"	
Product Weight	400g/0.88lb		470g/1.04lb	
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 600V			

MASTECH®



- Accessories Included
- Test leads
 - Protective cover
 - Detection connect line (MS8236)
 - Receiver (MS8236)
 - Battery and User's manual



MS8265

MS8261 / MS8264 / MS8269 / MS8268

DIGITAL MULTIMETER



V DC 1000V
AC 750V

A DC 10A
AC 10A

Accessories Included

- Test leads
- K type thermocouple (MS8264/MS8269)
- Multi-Function Socket
- Battery and User's manual



MS8265			
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV	0.01mV	±(0.05%+5)
	2V/20V/200V	0.1mV/1mV/10mV	±(0.1%+5)
	1000V	0.1V	±(0.15%+5)
AC Voltage	2V(50~60Hz)	0.1mV	±(0.5%+15)
	20V/200V(50~60Hz)	1mV/10mV	±(0.8%+15)
	750V(50~60Hz)	0.1V	±(1.0%+15)
	2V(40~400Hz)	0.1mV	±(1.0%+15)
	20V/200V(40~400Hz)	1mV/10mV	±(1.0%+50)
	750V(40~400Hz)	0.1V	±(1.2%+50)
DC Current	2mA/200mA	0.1µA/10µA	±(0.8%+10)
	10A	1mA	±(2.0%+20)
AC Current	2mA	0.1µA	±(0.8%+20)
	200mA	10µA	±(1.2%+20)
	10A	1mA	±(2.5%+50)
Resistance	200Ω	0.01Ω	±(0.5%+10)
	2kΩ/20kΩ/200kΩ	0.1Ω/1Ω/10Ω	±(0.5%+5)
	2MΩ/20MΩ	100Ω/1kΩ	±(0.5%+5)
	200MΩ	10kΩ	±(5.0%+20)
Capacitance	20nF/200nF/2µF	1pF/10pF/0.1nF	±(4.0%+20)
	20µF/200µF	1nF/10nF	±(4.0%+20)
Frequency	20kHz	1Hz	±(1.5%+15)
Features			
Display	counts	20000	
APO	Auto Power Off	•	
Sound & Light Warning	For incorrectly inserting the input plugs	•	
Transistor hFE	0~1000	•	
Diode	Open Voltage	3.0V	
Continuity Buzzer	<70Ω	•	
Data Hold		•	
Display Backlight		•	
LBD	Low Battery Display	•	
General			
Power Supply	1×9V 6F22 Battery		
Product Size	195mm×92mm×55mm/7.7"×3.6"×2.2"		
Product Weight	400g/0.9lb		
Certificate	RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		

MS8265

MS8261 / MS8264 / MS8269 / MS8268

MASTECH®

DIGITAL MULTIMETER

Specifications	Range	Resolution	MS8261	MS8264	MS8269	MS8268
			Accuracy			
DC Votage	200mV/2V/20V/200V	0.1mV/1mV/10mV/100mV	±(0.5%+1)	±(0.5%+1)	±(0.5%+1)	
	1000V	1V	±(0.8%+2)	±(0.8%+2)	±(0.8%+2)	
	400mV/4V/40V/400V	0.1mV/1mV/10mV/100mV				±(0.7%+2)
	1000V	1V				±(0.8%+2)
AC Votage	2V/20V/200V	1mV/10mV/100mV	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	
	750V	1V	±(1.2%+3)	±(1.2%+3)	±(1.2%+3)	
	400mV	0.1mV				±(3.0%+3)
	4V/40V/400V	1mV/10mV/100mV				±(0.8%+3)
	750V	1V				±(1.0%+3)
DC Current	2mA	1µA	±(0.8%+1)			
	20mA/200mA	10µA/0.1µA	±(1.5%+1)	±(1.5%+1)		
	200mA	0.1mA			±(1.5%+1)	
	10A	10mA	±(2.0%+5)	±(2.0%+5)	±(2.0%+5)	
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA				±(1.2%+3)
AC Current	10A	10mA				±(2.0%+5)
	2mA	1µA	±(1.0%+3)	±(1.0%+3)		
	200mA	0.1mA	±(1.8%+3)	±(1.8%+3)	±(1.8%+3)	
	10A	10mA	±(3.0%+7)	±(3.0%+7)	±(3.0%+7)	
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA				±(1.5%+5)
Resistance	10A	10mA				±(3.0%+7)
	200Ω	0.1Ω	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)	
	2kΩ/20kΩ/200kΩ/2MΩ	1Ω/10Ω/100Ω/1kΩ	±(0.8%+1)	±(0.8%+1)	±(0.8%+1)	
	20MΩ	10kΩ	±(1.0%+2)	±(1.0%+2)	±(1.0%+2)	
	200MΩ	0.1MΩ	±(5.0%+10)	±(5.0%+10)		
Capacitance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ				±(1.2%+2)
	40MΩ	10kΩ				±(2.0%+5)
	2nF	1pF	±(4.0%+3)			
	20nF/200nF/2µF/20µF	10pF/0.1nF/1nF/10nF	±(4.0%+3)	±(4.0%+3)		
	20nF/200nF/2µF	10pF/0.1nF/1nF			±(4.0%+8)	
Frequency	200µF	0.1µF			±(4.0%+15)	
	4nF	1pF				±(5.0%+5)
	40nF/400nF/4µF/40µF/200µF	10pF/100pF/1nF/10nF/0.1µF				±(3.0%+3)
	20kHz	10Hz		±(1.5%+5)		
	10Hz/100Hz/1000Hz	0.001Hz/0.01Hz/0.1Hz				±(2.0%+5)
Duty Cycle	10kHz/100kHz/200kHz	1Hz/10Hz/100Hz				±(2.0%+5)
Inductance	0.1%~99.9%	0.1%				±(2.0%+2)
Temperature	20mH/200mH/2H/20H	10µH/0.1mH/1mH/10mH			±(3.0%+8)	
	-20°C~0°C	1°C		±(5.0%+4)	±(5.0%+4)	
	1°C~400°C	1°C		±(1.0%+3)	±(1.0%+3)	
	401°C~1000°C	1°C		±(2.0%)	±(2.0%)	
Features						
Display	counts		2000	2000	2000	4000
Autoranging						•
APO	Auto Power Off		•	•	•	•
Sound & Light Warning	For incorrectly inserting the input plugs					•
REL	Relative Measurement					•
Transistor hFE	0~1000		•	•	•	•
Diode	Open Voltage		3.0V	3.0V	3.0V	1.5V
Continuity Buzzer			<70Ω	<70Ω	<70Ω	<70Ω
Data Hold			•	•	•	•
Display Backlight			•	•	•	•
LBD	Low Battery Display		•	•	•	•
General						
Model	MS8261/MS8264/MS8269		MS8268			
Power Supply	1×9V 6F22 Battery		3×1.5V AAA Batteries			
Product Size	195mm×92mm×55mm/7.7"×3.6"×2.2"		195mm×92mm×55mm/7.7"×3.6"×2.2"			
Product Weight	380g/0.83lb		400g/0.9lb			
Certificate	RoHS		RoHS			
Safety Rating	CATII 1000V/CATIII 600V		CATII 1000V/CATIII 600V			

MS8340B

MS8340A

DIGITAL MULTIMETER



V DC 1000V
AC 700V

A DC 10A
AC 10A

Accessories Included

- Test leads
- K type thermocouple (MS8340A)
- Multi-Function Socket (MS8340A)
- USB interface cable (MS8340B)
- Software CD (MS8340B)
- Battery and User's manual



MS8340A MS8340B				
Specifications	Range	Resolution	Accuracy	
DC Voltage	600mV/6V	0.1mV/1mV	±(0.5%+3)	
	6V/60V/600V/1000V	1mV/10mV/0.1V/1V	±(0.8%+3)	
	220mV/2.2V/22V	0.01mV/0.1mV/1mV		±(0.05%+3)
	220V/1000V	10mV/0.1V		±(0.05%+3)
AC Voltage	6V/60V/750V (50Hz)	10mV/0.1V/1V	±(1.5%+4)	
	6V/60V/750V (2kHz)	10mV/0.1V/1V	±(2.0%+3)	
	2.2V/22V/220V/700V (40–400Hz)	0.1mV/1mV/10mV/0.1V		±(0.8%+4)
DC Current	600μA/6mA/60mA/600mA/10A	0.1μA/1μA/10μA/0.1mA/10mA	±(1.2%+4)	
	220μA/2200μA/22mA/220mA/10A	0.01μA/0.1μA/1μA/10μA/1mA		±(0.8%+4)
AC Current	600μA/6mA/60mA/600mA	0.1μA/1μA/10μA/0.1mA	±(1.5%+3)	
	10A	10mA	±(2.0%+3)	
	200μA/2200μA/22mA/220mA	0.01μA/0.1μA/1μA/10μA		±(1.0%+3)
	10A	1mA		±(1.5%+3)
Resistance	600Ω/6kΩ/60kΩ/600kΩ/6MΩ/60MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ/10kΩ	±(1%+2)	
	220Ω/2.2kΩ/22kΩ/220kΩ	0.01Ω/0.1Ω/1Ω/10Ω		±(0.8%+2)
	2.2MΩ/22MΩ/220MΩ	0.1kΩ/1kΩ/10kΩ		±(0.8%+2)
Capacitance	40nF/400nF	10pF/0.1nF	±(3.0%+2)	
	4μF/40μF/400μF	1nF/10nF/0.1μF	±(3.5%+2)	
	22nF/220nF/2.2μF/22μF	1pF/10pF/0.1nF/1nF		±(2.5%+3)
	220μF/2.2mF/220mF	10nF/0.1μF/10μF		±(2.5%+3)
Frequency	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(2.0%+3)	
	100kHz/1MHz/10MHz	10Hz/0.1kHz/1kHz	±(2.0%+3)	
	22Hz/220Hz/2.2kHz	0.001Hz/0.01Hz/0.1Hz		±(2.0%+3)
	22kHz/220kHz	1Hz/10Hz		
Duty Cycle	1%–99%	0.1%	±(1.0%)	±(1.0%)
Temperature	-10°C–700°C/14°F–1292°F	1°C /1°F	±(3.0%+3)	
Special Functions				
LCD Display	counts		6000	22000
Auto Ranging	Auto & Manual		●	●
APO	Auto Power Off		●	●
REL	Relative Measurement		●	●
PEAK	Peak Measurement			●
LPF	1kHz Low Pass Filter		●	
Diode	Open Voltage		2.8V	2.8V
Continuity Buzzer			<50±20Ω	<30Ω
MAX/MIN			●	●
True RMS				●
Display Backlight			●	●
LBD	Low Battery Display		●	●
USB Interface	Windows OS			●
General				
Power Supply	4×1.5V AA Batteries			
Product Size	205mm×102mm×58mm/8.1"×4.0"×2.2"			
Product Weight	390g/0.86lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 1000V			

MS8209

DIGITAL MULTIMETER with Environment 4 in 1



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8209			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/100mV/1V	±(0.7%+2)
AC Voltage	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/100mV/1V	±(0.8%+3)
DC Current	40mA/400mA	10μA/100μA	±(1.2%+3)
	10A	10mA	±(2.0%+10)
	40mA/400mA	10μA/100μA	±(1.5%+5)
	10A	10mA	±(3.0%+10)
AC Current	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ	±(1.2%+2)
	40MΩ	10kΩ	±(2.0%+5)
	4nF/40nF/400nF	1pF/10pF/0.1nF	±(3.0%+3)
	4μF/40μF/200μF	1nF/10nF/100nF	±(3.0%+3)
Resistance	10Hz	0.001Hz	±(2.0%+5)
	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
	100kHz/200kHz	10Hz/100Hz	±(2.0%+5)
	>200kHz	0.1kHz	Reference
Capacitance	Duty Cycle	0.1%~99.9%	0.1% ±(3.0%)
	Temperature	-20°C~0°C	1°C ±(5.0%+5)
	Temperature (K-Type)	0°C~400°C	1°C ±(1.0%+3)
	Temperature	400°C~1000°C	1°C ±(2.0%+3)
Frequency	Relative Humidity	30%~90%	0.1% ±5.0%RH
	Sound Level	35dB~100dB (±3.5dB @94dB 1kHz sine wave)	0.1dB ±(3.5%)
	Luminosity	4000Lux/40000Lux	1Lux/10Lux ±(5.0%+10)
	Features		
Resistance	Display	counts	4000
	Auto Ranging	Auto & Manual	•
	APO	Auto Power Off	•
	Diode	Open Voltage	1.5V
Capacitance	Continuity Buzzer	<40Ω	•
	REL	Relative Measurement	•
	Data Hold		•
	LBD	Low Battery Display	•
Frequency	Display Backlight		•
	General		
	Power Supply	1×9V 6F22 Battery	
	Product Size	158mm×78mm×39mm/6.2"×3.1"×1.5"	
Resistance	Product Weight	260g/0.55lb	
	Certificate	RoHS	
	Safety Rating	CAT III 600V	

MASTECH®



Accessories Included

- Test leads
- K type thermocouple
- Carry bag
- Battery and User's manual



MS8228

DIGITAL MULTIMETER with infrared thermometer



- Accessories Included
- Test leads
 - Multi-Function Socket
 - Battery and User's manual



V DC 1000V
AC 750V

A DC 10A
AC 10A

MS8228			
Specifications	Range	Resolution	Accuracy
DC Voltage	40mV/400mV/4V/40V/	10µV/0.1mV/1mV/10mV/	±(0.7%+2)
	400V/1000V	0.1V/1V	
AC Voltage	40mV/400mV/4V/40V/400V	10µV/0.1mV/1mV/10mV/0.1V	±(0.8%+3)
	750V	1V	
DC Current	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.2%+3)
	4A/10A	1mA/10mA	
AC Current	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.5%+5)
	4A/10A	1mA/10mA	
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.2%+2)
	40MΩ	10kΩ	
Capacitance	50nF/500nF/5µF/50µF/100µF	10pF/0.1nF/1nF/10nF/0.1µF	±(3.0%+3)
	10Hz	0.001Hz	
Frequency	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
	100kHz/200kHz	10Hz/0.1kHz	
Duty Cycle	0.1%~99.9%	0.10%	±(3.0%)
Infrared Thermometer	-20°C~270°C	1°C	±(2.0%+3)
	270°C~300°C	1°C	
	-4°F~572°F	1°F	±(2.0%+6)
	0°C~40°C	1°C	
Environment	32°F~104°F	1°F	±(4.0°F)
Relative Humidity	20%~95%	0.1%	±(5.0%)
Features			
Display	counts		4000
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
Sound & Light Warning	For Incorrectly Inserting the Input Plugs		•
Laser Pointer	Targeting the measured point		•
°C/°F Selection			•
hFE	1~1000β for transistor under test		•
Emissivity	0.95		•
REL	Relative measurement		•
IR-T	Infrared temperature		•
Diode	Open Voltage		1.8V
Continuity Buzzer	<50±20Ω		•
Data Hold			•
LBD	Low Battery Display		•
Display Backlight			•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	195mm×92mm×55mm/7.7"×3.6"×2.2"		
Product Weight	400g/0.89lb		
Certificate	RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		

MS8229

DIGITAL MULTIMETER with Environment 5 in 1



V DC 600V
AC 600V

A DC 10A
AC 10A

MS8229			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V	±(0.7%+2)
AC Voltage	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(0.8%+3)
	600V	1V	
DC Current	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.2%+3)
	4A/10A	1mA/10mA	
AC Current	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA	±(1.5%+5)
	4A/10A	1mA/10mA	
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.2%+2)
	40MΩ	10kΩ	
Capacitance	40nF/400nF/4µF/40µF/100µF	0.01nF/0.1nF/1nF/10nF/0.1µF	±(3.0%+3)
	10Hz	0.001Hz	
Frequency	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
	100kHz/200kHz	10Hz/0.1kHz	
Duty Cycle	>200kHz	0.1kHz	Reference
	0.1%~99.9%	0.1%	±(3.0%)
Temperature (K-Type)	-20°C~0°C	1°C	±(5.0%+3)
	1°C~400°C	1°C	
	401°C~1000°C	1°C	±(2.0%)
	-4°F~32°F	1°F	
	33°F~752°F	1°F	±(1.0%+4)
	753°F~1832°F	1°F	
Environment	0°C~40°C	0.1°C	±(2.0°C)
	32°F~104°F	0.1°F	
Relative Humidity	20%~95%	0.10%	±(5.0%)
Sound Level	40dB~100dB	0.1dB	±(3.5%)
Luminosity	4000Lux/40000Lux	1Lux/10Lux	±(5.0%+10)
Features			
Display	Counts		4000
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
°C/°F Selection			•
Diode	Open Voltage		1.5V
Continuity Buzzer	<50±20Ω		•
Data Hold			•
LBD	Low Battery Display		•
Display Backlight			•
Sound & Light Warning	For Incorrectly Inserting the Input Plugs (S Version only)		•
General			
Power Supply	3×1.5V AAA Battery		
Product Size	195mm×92mm×55mm/7.7"×3.6"×2.2"		
Product Weight	390g/0.86lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

MASTECH®



- Accessories Included
- Test leads
 - K type thermocouple
 - Battery and User's manual



MS5206

DIGITAL INSULATION MULTIMETER



V DC 1000V
AC 660V

V DC 1000V
OUTPUT

- Accessories Included
- Test Leads
 - Test Clips
 - Carry Bag
 - Battery and User's Manual



MS5206				
Specifications	Range	Resolution	Accuracy	
DC Voltage	6.6V/66V/660V/1000V	0.001V/0.01V/0.1V/1V	±(1.0%+5)	
AC Voltage	6.6V/66V/660V	0.001V/0.01V/0.1V	±(3.0%+5)	
Resistance	20Ω/200Ω/2kΩ/20kΩ/200kΩ	0.01Ω/0.1Ω/1Ω/0.01kΩ/0.1kΩ	±(3.0%+10)	
Insulation Function				
Output Voltage	Range	Resolution	Test Current	Accuracy
50V (0~20%)	0MΩ~20MΩ	0.01MΩ	1mA@50k	±(2.0%+5)
	20MΩ~50MΩ	0.1MΩ		
100V (0~20%)	0MΩ~20MΩ	0.01MΩ	1mA@100k	±(2.0%+5)
	20MΩ~100MΩ	0.1MΩ		
250V (0~20%)	0M~20MΩ	0.01MΩ	1mA@250k	±(2.0%+5)
	20M~200MΩ	0.1MΩ		
500V (0~20%)	0M~20MΩ	0.01MΩ	1mA@500k	±(2.0%+5)
	20M~200MΩ	0.1MΩ		
	200M~500MΩ	1MΩ		
1000V (0~20%)	0M~200MΩ	0.1MΩ	1mA@1000k	±(2.0%+5)
	200M~2000MΩ	1MΩ		
	2G~10GΩ	0.1GΩ		
Features				
Display	counts			6600
Auto Ranging	Auto			●
APO	Auto Power Off			●
True RMS	For AC Voltage & AC Current			●
MAX/MIN				●
DAR/PI	For Insulation Mode			●
COMPARE				●
Lock				●
Display Backlight				●
LBD	Low Battery Display			●
Wireless	APP connection			●
General				
Power Supply	4×1.5V AA Batteries			
Product Size	205mm×102mm×58mm/8.1"×4.0"×2.3"			
Product Weight	390g/0.86lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 1000V			

MS5208

DIGITAL INSULATION MULTIMETER



A DC 400mA
AC 400mA

V DC 1000V
AC 750V

V DC 1000V
OUTPUT

MS5208				
Specifications	Range	Resolution	Accuracy	
DC Voltage	660mV/6.6V/66V/660V/1000V	0.1mV/1mV/10mV/0.1V/1V	±(0.5%+5)	
AC Voltage	660mV/6.6V/66V/660V/750V	0.1mV/1mV/10mV/0.1V/1V	±(1.5%+30)	
DC Current	66mA/400mA	10μA/0.1mA	±(1.0%+5)	
AC Current	66mA/400mA	10μA/0.1mA	±(1.5%+30)	
Resistance	660Ω/6.6kΩ/66kΩ/660kΩ	0.1Ω/1Ω/10Ω/0.1kΩ	±(1.2%+5)	
	6.6MΩ/66MΩ	1kΩ/10kΩ	±(2.0%+20)	
Capacitance	66nF/660nF/6.6μF/66μF	10pF/0.1nF/1nF/10nF	±(5.0%+20)	
	660μF/6.6mF/66mF	0.1μF/1μF/10μF	±(5.0%+20)	
Frequency	660.0Hz/6.600kHz/66.00kHz	0.1Hz/1Hz/10Hz	±(1.5%+5)	
	>10kHz	10Hz	Reference	
Temperature	-30°C~1300°C	1°C	±(1.0%+2)	
	-22°F~2372°F	1°F	±(1.0%+4)	
Insulation Function				
Output Voltage	Range	Resolution	Test Current	Accuracy
50V (0~20%)	0M~5MΩ	0.01MΩ	1mA@50k	±(3.0%+5)
	5M~50MΩ	0.1MΩ		
100V (0~20%)	0M~5MΩ	0.01MΩ	1mA@100k	±(3.0%+5)
	5M~50MΩ	0.1MΩ		
250V (0~20%)	50M~100MΩ	1MΩ	1mA@250k	±(3.0%+5)
	0M~25MΩ	0.1MΩ		
500V (0~20%)	25M~250MΩ	1MΩ	1mA@250k	±(3.0%+5)
	0M~50MΩ	0.1MΩ		
1000V (0~20%)	50M~500MΩ	1MΩ	1mA@500k	±(3.0%+5)
	0M~50MΩ	0.1MΩ		
1000V (0~20%)	50M~500MΩ	1MΩ	1mA@1000k	±(3.0%+5)
	0.5G~2.0GΩ	0.1GΩ		
Features				
Display	counts			6600
Auto Ranging	Auto & Manual			●
APO	Auto Power Off			●
True RMS	For AC Voltage & AC Current			●
DAR/PI	For Insulation Mode			●
REL	Relative Measurement			●
Continuity Buzzer	<30Ω			●
Diode	Open Voltage			2.4V
LPF	Low Pass Filter Function (1kHz)			●
LOCK				●
Data Logging	100 Groups			●
Data Recording				●
MAX/MIN/AVG				●
Data Hold				●
Display Backlight				●
LBD	Low Battery Display			●
General				
Power Supply	4×1.5V AA Batteries			
Product Size	205mm×102mm×58mm/8.1"×4.0"×2.3"			
Product Weight	390g/0.86lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 1000V			

MASTECH®



- Accessories Included
- Test Leads
 - Test Clips
 - K Type Thermocouple
 - Multi-Function Socket
 - Carry Bag
 - Battery and User's Manual



MS6100

MULTI-FUNCTION DIGITAL COUNTER



A 10Hz~100MHz
INPUT

B 100MHz~1300MHz
INPUT

- Accessories Included
- BNC to BNC Test Lead (50 ohm, 100cm)
 - Power Cord
 - User's Manual

MS6100

Frequency Measurements			
Channel	Range	Resolution	Accuracy
A	10MHz (10Hz~10MHz)	1,10,100Hz selectable	±1 count ±1x 10 ⁻⁵ x frequency (month) ±1 count ±5x10 ⁻⁶ x frequency (minute)
	100MHz (10MHz~100MHz)	10,100,1000Hz selectable	
B	1300MHz (100MHz~1300MHz)	100Hz,1kHz,10kHz selectable	
Period Measurements			
Channel	Range	Resolution	Accuracy
A (only)	0.1S~0.1μS (10Hz~10MHz)	0.0μS 0.00μS 0.000μS selectable	±1 count ±1x10 ⁻⁵ x frequency (month) ±1 count ±5x10 ⁻⁶ x frequency (minute)
Total Measurements			
Channel	Range	Resolution	
A (only)	10Hz~10MHz	1 count input	
Input Characteristics			
Channel A	MAX Input Voltage: 250V RMS / Impedance: 1MΩ less than 35pF		
Channel B	MAX Input Voltage: 3V RMS / Impedance: 50Ω		
Features			
Display	8 digits (22000 count), about 10mm high red LED display with decimal point		
Power Requirement	AC 198~264V 50/60Hz		
	AC 90~132V 50/60Hz		
Temperature	Operating: 0°C~40°C		
	Storage: -10°C~50°C		
Relative Humidity	20%~80%RH (0°C~40°C)		
Low Pass Filter	~100kHz, -3dB		
	~150kHz, -3dB at ATTN condition		
Data Hold	●		
Self Check	●		
Overrange Indications	●		
OSC. Out	10MHz		
General			
Power Supply	220V/110V AC		
Product Size	300mm×260mm×74mm/11.8"×10.2"×2.9"		
Product Weight	1850g/4.02lb		
Certificate	RoHS		

M9803R

AUTORANGING BENCH TOP MULTIMETER



V DC 1000V
AC 750V

A DC 10A
AC 10A

- Accessories Included
- Test leads
 - Power cord
 - RS232C cable
 - Software CD
 - Carrying strap
 - User's manual



M9803R

Specifications	Range	Resolution	Accuracy
DC Voltage	400mV	0.1mV	±(0.3%+5)
	4V/40V/400V/1000V	1mV/10mV/0.1V/1V	±(0.3%+2)
AC Voltage	4V/40V/400V/750V (50Hz~60Hz)	1mV/10mV/0.1V/1V	±(0.8%+5)
	4V/40V/400V/750V (45Hz~1kHz)	1mV/10mV/0.1V/1V	±(1.2%+5)
DC Current	4mA/40mA/400mA	1μA/10μA/0.1mA	±(0.8%+5)
	10A (20A for 30seconds)	10mA	±(1.5%+10)
AC Current	4mA/40mA/400mA (45Hz~400Hz)	1μA/10μA/0.1mA	±(1.5%+5)
	10A (20A for 30seconds) (45Hz~400Hz)	10mA	±(2.0%+10)
Resistance	400Ω	0.1Ω	±(0.5%+5)
	4kΩ/40kΩ/400kΩ	1Ω/10Ω/0.1kΩ	±(0.5%+3)
	4MΩ	1kΩ	±(1.0%+5)
	40MΩ	10kΩ	±(1.5%+10)
Capacitance	4nF	1pF	±(2.0%+40)
	40nF/400nF/4μF	10pF/0.1nF/1nF	±(2.0%+5)
	40μF (at ≤20μF)	10nF	±(2.0%+5)
	40μF (at >20μF)	10nF	±(5.0%+5)
Frequency	100Hz/1kHz/10kHz/100kHz/600kHz	0.1Hz/1Hz/10Hz/0.1kHz/1kHz	±(0.1%+4)
ADP Measurement	≤400mV (10 Counts per 1mV DC)	1mV	±(0.3%+5)

Features	
Display	4000counts digital indication. Frequency Range: 9999counts Max.
Auto Ranging	Auto & Manual
True RMS	For AC Voltage & AC Current
REL	Relative Measurement
Diode	3.0V
Continuity Buzzer	<40Ω
MAX/MIN	•
Data Hold	•
Display Backlight	•
Display Storage	Display can be memorized and recallable
USB Interface	Windows OS
General	
Power Supply	220V/110V AC (50~60Hz) 1×9V 6F22 Battery, 6×1.5V AA Batteries
Product Size	238mm×230mm×83mm/9.4"×9.1"×3.3"
Product Weight	1500g/3.3lb
Certificate	RoHS
Safety Rating	CAT II 1000V

MS8040

TRUE RMS BENCH TOP MULTIMETER with 22000 counts



V	DC	1000V
	AC	750V
A	DC	10A
	AC	10A

Accessories Included

- Test Leads
- K Type Thermocouple
- Multi-Function Socket
- RS232C Cable
- Power cord
- Software CD
- User's manual

MS8040			
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV/2V/20V/200V/1000V	0.01mV/0.1mV/1mV/10mV/0.1V	±(0.05%+6)
	(40Hz~60Hz)		±(0.5%+30)
AC Voltage	200mV/2V/20V/200V/750V	0.01mV/0.1mV/1mV/10mV/0.1V	±(1.5%+30)
	(60Hz~5kHz)		±(2.5%+30)
	(5kHz~10kHz)		
DC Current	200µA/2mA/20mA/200mA	0.01µA/0.1µA/1µA/10µA	±(0.15%+15)
	10A	1mA	±(0.5%+15)
AC Current	200µA/2mA/20mA/200mA	0.01µA/0.1µA/1µA/10µA	±(0.8%+30)
	(40Hz~60Hz)		±(1.0%+30)
	(60Hz~1kHz)		±(1.0%+30)
	(1kHz~5kHz)		±(1.5%+30)
	(40Hz~60Hz)	1mA	±(1.2%+30)
	(60Hz~1kHz)		±(2.0%+30)
Resistance	200Ω/2kΩ	0.01Ω/0.1Ω	±(0.1%+10)
	20kΩ/200kΩ	1Ω/10Ω	±(0.1%+5)
	2MΩ	0.1kΩ	±(0.1%+10)
	20MΩ	1kΩ	±(0.5%+10)
	200MΩ	10kΩ	±(2%+10)
Capacitance	2nF/200nF/2µF/20µF	0.1pF/10pF/0.1nF/1nF	±(1.2%+30)
	200µF/2000µF/20mF	10nF/0.1µF/1µF	±(2.2%+30)
Logic Frequency	20Hz~220MHz	1Hz	±(0.06%+10)
Temperature	-30°C~1300°C	1°C	±(1.0%+2)
	-22°F~2372°F	1°F	±(1.0%+4)
Duty Cycle	5%~95%	0.10%	±(10.0%)
Clamp DC Current	220A/2200A	0.01A/0.1A	±(0.1%+10)
Clamp AC Current	220A/2200A (50Hz~60Hz)	0.01A/0.1A	±(1.0%+30)

Features	
Dual Display	22000 counts and 44 Segments Bars Graph
Auto Ranging	Auto & Manual
Auto Power Off	•
True RMS	For AC Voltage & AC Current
Low pass filter (1kHz)	For AC Voltage & AC Current
Relative Measurement	•
Peak Measurement	•
Diode	2.8V
Continuity Buzzer	<30Ω
MAX/MIN	•
Data Hold	•
Display Backlight	•
USB Interface	Windows OS
General	
Power Supply	220V/110V AC (50~60Hz)
Product Size	238mm×230mm×83mm/ 9.4"×9.1×3.3"
Product Weight	1500g/3.4lb
Certification	CE/ETL/RoHS
Safety Rating	CAT II 1000V

MS8050

TRUE RMS BENCH TOP MULTIMETER with 53000 counts



V	DC	1000V
	AC	1000V
A	DC	10A
	AC	10A

Accessories Included

- Test leads
- RS232C cable
- User's manual
- Alligator clip
- Software CD
- Power cord
- Carrying strap

MS8050			
Specifications	Range	Resolution	Accuracy
DC Voltage	50mV	0.001mV	±(0.03%+10)
	500mV/5V/50V/ 500V/1000V	0.01mV/0.1mV/1mV/ 10mV/0.1V	±(0.03%+6)
AC Voltage	50mV/500mV/5V/ 50V/500V/1000V (40Hz~1kHz)	0.001mV/0.01mV/0.1mV/ 1mV/10mV/0.1V	±(0.5%+40)
	50mV/500mV/5V/ 50V/500V (1kHz~10kHz)	0.001mV/0.01mV/0.1mV/ 1mV/10mV	±(1.0%+40)
	1000V (1kHz~10kHz)	0.1V	unspecified
	50mV/500mV/5V/ 50V (10kHz~20kHz)	0.001mV/0.01mV/0.1mV/ 1mV	±(2.5%+40)
	500V/1000V (10kHz~20kHz)	10mV/0.1V	unspecified
DC Current	500µA	0.01µA	±(15%+15)
	5mA/50mA/500mA	0.1µA/1µA/10µA	±(15%+10)
AC Current	5A/10A	0.1mA/1mA	±(0.5%+10)
	500µA/50mA/5A (40Hz~1kHz)	0.01µA/1µA/0.1mA	±(0.75%+20)
	5000µA/500mA/10A (40Hz~1kHz)	0.1µA/10µA/1mA	±(0.75%+10)
	500µA/50mA/5A (1kHz~10kHz)	0.01µA/1µA/0.1mA	±(1.0%+20)
	5000µA/500mA/10A (1kHz~10kHz)	0.1µA/10µA/1mA	±(1.0%+10)
	500µA/50mA/5A (10kHz~20kHz)	0.01µA/1µA/0.1mA	±(2.0%+20)
	5000µA/500mA (10kHz~20kHz)	0.1µA/10µA	±(2.0%+10)
	10A(10kHz~20kHz)	1mA	unspecified
Resistance	500Ω	0.01Ω	±(0.1%+10)
	5kΩ/50kΩ/500kΩ	0.1Ω/1Ω/10Ω	±(0.1%+5)
	5MΩ	0.1kΩ	±(0.1%+10)
	50MΩ	1kΩ	±(0.5%+10)
Capacitance	50nF/500nF	1pF/10pF	±(1.0%+15)
	5µF/50µF	0.1nF/1nF	±(1.0%+10)
	500µF/5000µF	10nF/0.1µF	±(2.0%+10)
Logic Frequency	5Hz~2MHz	1Hz	±(0.006%+4)
Duty Cycle	10%~90%	0.01%	±(10.0%)
Linear Frequency	5Hz~200kHz	1Hz	±(0.006%+4)

Features	
Display VFD	53000 counts
Auto Ranging	Auto & Manual
Auto Power Off	•
True RMS	•
Relative Measurement	•
Diode	Open Voltage: 3.3V
Continuity Buzzer	<50±20Ω
dBm Measurement	•
MAX/MIN/AVG	•
Data Hold	•
Data Logging	30 groups
PC Analysis Software	•
USB Interface	Windows OS
General	
Power Supply	220V/110V AC
Product Size	350mm×240mm×100mm/13.8"×9.5"×3.9"
Product Weight	2500g/5.5lb
Certificate	RoHS
Safety Rating	CAT II 1000V



Digital Clamp Meters



V DC 600V
AC 600V

Ø 26mm/1.0"

A AC 600A

MS2033A			
Specifications	Range	Resolution	Accuracy
DC Voltage	6V/60V/600V	0.01V/0.1V/1V	±(0.5%+3)
AC Voltage	6V/60V/600V	0.01V/0.1V/1V	±(0.8%+5)
AC Current	2A/20A/200A	0.01A/0.01A/0.1A	±(2.5%+8)
	600A	1A	±(3.0%+10)
Resistance	2kΩ/20kΩ/200kΩ/2MΩ	0.001kΩ/0.01kΩ/0.1kΩ/0.001MΩ	±(0.8%+3)
	10MΩ	0.01MΩ	±(1.0%+5)
Frequency (Clamp)	60Hz/600Hz/3kHz	0.1Hz/1Hz/10Hz	±(1.0%+5)
Frequency (Plug)	60Hz/600Hz/3kHz	0.1Hz/1Hz/10Hz	±(1.0%+5)
Duty Cycle	10% ~ 90%	1%	±2.0%
Features			
Display	counts		6000
Jaw Opening			Ø26mm/1.0"
Auto range	Auto		•
APO	Auto Power Off		•
Dual Display			•
Continuity Buzzer	<40Ω		•
A Hold	Data Auto hold		•
MAX/MIN			•
Display Backlight			•
LBD	Low Battery Display		•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	204mm×78mm×43mm/8"×3.07"×1.77"		
Product Weight	195g/0.43lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		



- Accessories Included
- Test Leads
- Battery and User's manual

SMART



ACA & ACV



MS2016A

AC LEAKAGE CURRENT METER



V DC 600V
AC 600V

Ø 30mm/1.2"

A AC 4mA~150A

MS2016A			
Specifications	Range	Resolution	Accuracy
DC Voltage	4V/40V/400V/600V	1mV/10mV/100mV/1V	±(0.5%+4)
AC Voltage	4V/40V/400V/600V	1mV/10mV/100mV/1V	±(1.0%+3)
AC Current	4mA/40mA (50/60Hz)	1µA/10µA	±(2.0%+10)
	400mA/4A/40A (50/60Hz)	0.1mA/1mA/10mA	±(2.0%+5)
	150A (50/60Hz)	0.1A	±(2.0%+10)
	4mA/40mA (40~1kHz)	1µA/10µA	±(3.0%+5)
	400mA/4A/40A (40~1kHz)	0.1mA/1mA/10mA	±(3.0%+3)
Resistance	150A (40~1kHz)	0.1A	±(3.0%+5)
	400Ω/4KΩ/40KΩ/400KΩ/4MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ	±(0.8%+3)
	40MΩ	10kΩ	±(1.0%+3)
Capacitance	40nF/400nF/4uF	0.01nF/0.1nF/1nF	±(3.0%+8)
	40uF/400uF/4mF/40mF	10nF/100nF/1uF/10uF	±(3.0%+8)
Temperature	-20°C ~ 0°C/-4°F ~ 32°F	0.1°C/0.1°F	±(3.0%+5)
	0°C ~ 400°C/32°F ~ 752°F	0.1°C/0.1°F	±(1.5%+5)
Features			
Display	counts	4000	
Jaw Opening		Ø30mm/1.2"	
Auto Ranging	Auto	•	
APO	Auto Power Off	•	
True RMS	For AC Voltage	•	
LPF	Low Pass Filter Function (50/60Hz)	•	
Zero	Zero adjustment	•	
MAX/MIN		•	
Diode	Open Voltage	3.2V	
Continuity	Continuity Buzzer	<40Ω	
Data Hold		•	
LBD	Low Battery Display	•	
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	213mm×62mm×38mm/8.39"× 2.44"×1.5"		
Product Weight	238g/0.52lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

- Accessories Included
- Test Leads
 - K Type Thermocouple
 - Battery and User's manual



MS2225A

SINGLE PHASE POWER CLAMP METER



V DC 1000V
AC 750V

Ø 40mm/1.6"

A AC 1000A

MS2225A			
Specifications	Range	Resolution	Accuracy
DC Voltage	6V/60V/600V	0.001V/0.01V/0.1V	±(0.5%+5)
	1000V	1V	±(0.8%+4)
AC Voltage	6V/60V/600V	0.001V/0.01V/0.1V	±(0.6%+5)
	750V	1V	±(0.8%+4)
AC Current	60A/600A/1000A	0.01A/0.1A/1A	±(2.0%+8)
Inrush Current	60A/600A/1000A	0.01A/0.1A/1A	±(5.0%+60)
Resistance	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(2.0%+5)
Capacitance	9.999nF/99.99nF/999.9nF/9.999µF	0.001nF/0.01nF/0.1nF/0.001µF	±(3.0%+5)
	99.99µF/999.9µF/9.999mF/99.99mF	0.01µF/0.1µF/0.001mF/0.01mF	±(3.0%+5)
Active Power	3.0W/100.0W/4000W/ 10.0kW/100.0kW/750kW	0.01W/0.1W/1W/ 0.01kW/0.1kW/1kW	±(3.0%+5)
Apparent Power	3.0VA/100.0VA/4000VA/ 10.0kVA/100.0kVA/750kVA	0.01VA/0.1VA/1VA/ 0.01kVA/0.1kVA/1kVA	±(3.0%+5)
Reactive Power	3.0VAr/100.0VAr/4000VAr/ 10.0kVAr/100.0kVAr/750kVAr	0.01VAr/0.1VAr/1VAr/ 0.01kVAr/0.1kVAr/1kVAr	±(3.0%+5)
Power Factor	0.3~1	0.001	±(3.0%+5)
Frequency (V)	99.99Hz/999.9Hz/9.999kHz/ > 10kHz	0.01Hz/0.1Hz/0.001kHz/ 0.01kHz	±(1.5%+5)
Frequency (A)	99.99Hz/999.9Hz/ > 1kHz	0.01Hz/0.1Hz/ 0.001kHz	±(1.5%+5)
Frequency (W)	40~1kHz	0.1Hz	±(0.5%+1)
Frequency (KW)	40~1kHz	0.1Hz	±(0.5%+1)
Frequency (Hz/Duty)	10Hz/100Hz/1000Hz/10kHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz	±(0.3%+5)
	100kHz/1000kHz/10MHz	0.01kHz/0.1kHz/0.001MHz	±(0.3%+5)
Duty Cycle	0.1%-99.9%	0.10%	±(3.0%+3)
Harmonic Measurement	Harmonic Number:1		±(3.0%+10)
	Harmonic Number:2~6		±(3.5%+10)
	Harmonic Number:7~8		±(4.5%+10)
	Harmonic Number:9~10		±(5.0%+10)
	Harmonic Number:11~15		±(7.0%+10)
	Harmonic Number:16~20		±(10%+10)
Features			
Display	counts	6000	
Jaw Opening		Φ40mm/1.6"	
Auto Ranging	Auto & Manual	•	
APO	Auto Power Off	•	
True RMS	True root mean square	•	
Diode	Open voltage	3.2V	
Continuity	Continuity Buzzer	<50Ω	
Inrush	Inrush Current measurement	•	
MAX/MIN		•	
Data Hold		•	
REL	Relative measurement	•	
Display Backlight		•	
Worklight		•	
LBD	Low Battery Display	•	
NCV	Non-Contact Voltage Detector	•	
Wireless	APP Connection	•	
General			
Power Supply	9V 6F22 Battery		
Product Size	250mm×98mm×53mm/9.84"×3.78"×2.09"		
Product Weight	450g/0.99lb		
Certifiacte	CE/ETL/RoHS		
Safety Rating	CAT III 1000V		



- Accessories Included
- Test Leads
 - Carry Bag
 - Battery and User's Manual



M266

M266C / M266F

DIGITAL AC CLAMP METER



- Accessories Included
- Test Leads

K Type Thermocouple (M266C)

Carry Bag

Battery and User's Manual



V

DC 1000V

AC 750V

Ø 50mm/2.0"

A AC 1000A

Specifications	Range	Resolution	Accuracy		
			M266	M266C	M266F
DC Voltage	200mV	0.1mV		±(0.5%+1)	
	2V/20V/200V	1mV/10mV/0.1V		±(0.5%+3)	±(0.5%+3)
	1000V	1V	±(0.8%+3)	±(0.8%+3)	±(0.8%+3)
AC Voltage	200V	0.1V		±(1.0%+5)	±(1.0%+5)
	750V	1V	±(1.2%+5)	±(1.2%+5)	±(1.2%+5)
AC Current	20A	10mA		±(4.0%+5)	
	200A	0.1A	±(2.5%+5)	±(2.5%+5)	±(2.5%+5)
	1000A	1A	±(3.0%+10)	±(3.0%+10)	±(3.0%+10)
Resistance	200Ω	0.1Ω	±(1.0%+5)	±(1.0%+5)	±(1.0%+5)
	2kΩ	1Ω			±(1.0%+8)
	20kΩ	10Ω	±(1.0%+8)	±(1.0%+8)	±(1.0%+8)
	200kΩ	0.1kΩ			±(1.0%+8)
Frequency	2kHz	1Hz			±(2.0%+5)
	20MΩ	10kΩ		±(2.0%+2)	
Insulation Test	2000MΩ (Note<500MΩ)	1MΩ		±(4.0%+2)	
	2000MΩ (Note>500MΩ)	1MΩ		±(5.0%+2)	
Features					
Display	counts			2000	
Jaw Opening				Φ50mm/2.0"	
Diode	Open Voltage				2.7V
Continuity Buzzer	<100Ω			•	
Data Hold				•	
LBD	Low Battery Display			•	
General					
Power Supply	1×9V 6F22 Battery				
Product Size	235mm×96mm×46mm/9.25"×3.8"×1.8"				
Product Weight	268g/0.59lb				
Model Number	M266	M266C	M266F		
Certification	CE / ETL / RoHS	RoHS	CE / ETL / RoHS		
Safety Rating	CAT II 1000V/ CAT III 600V	CAT II 1000V/ CAT III 600V	CAT II 1000V/ CAT III 600V		

MS2000R

MS2000G

DIGITAL AC/DC CLAMP METER

MASTECH®



V

DC 1000V

AC 750V

Ø 55mm/2.2"

A

DC 1000A

AC 1000A

Specifications	Range	Resolution	Accuracy	
			MS2000G	MS2000R
DC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(0.5%+1)	
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V		±(0.8%+1)
	1000V	1V	±(1.0%+2)	±(1.0%+2)
AC Voltage	200V/750V	0.1V/1V	±(1.0%+3)	
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V		±(1.0%+5)
	750V	1V		±(1.2%+5)
DC Current	400A	0.1A		±(2.0%+5)
	1000A(400~600A)	1A		±(2.0%+5)
	1000A(>600A)	1A		±(3.0%+5)
AC Current	200A	0.1A	±(2.0%+5)	
	2000A(<600A)	1A	±(2.0%+5)	
	2000A(600A~1000A)	1A	±(3.0%+5)	
	2000A(>1000A)	1A	±(3.0%+15)	
	400A	0.1A		±(2.0%+5)
	1000A(400~600A)	1A		±(2.0%+5)
Resistance	1000A(>600A)	1A		±(3.0%+5)
	200Ω	0.1Ω	±(1.0%+3)	
	20kΩ/2MΩ	10Ω/1kΩ	±(1.5%+15)	
Frequency	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ		±(1.5%+5)
	40MΩ	10kΩ		±(2.5%+10)
	2kHz	1Hz	±(2.0%+5)	
Temperature	20kHz	10Hz	±(1.5%+5)	
	4kHz/40kHz/400kHz	1Hz/10Hz/100Hz		±(1.0%+5)
	0°C~400°C/32°F~752°F	1°C/1°F	±(1.0%+3)	
Features	401°C~750°C/753°F~1382°F	1°C/1°F	±(2.0%+1)	
	Display	counts	2000	4000
Jaw Opening	Φ55mm/2.2"		•	•
Auto Ranging	Auto			•
APO	Auto Power Off			•
True RMS	True Root Mean Square			•
REL	Relative Measurement			•
MAX/MIN				•
Diode	Open Voltage	3.0V		
Continuity Buzzer	<30Ω		•	•
Data Hold			•	•
Display Backlight			•	•
LBD	Low Battery Display		•	•
General				
Power Supply	1×9V 6F22 Battery			
Product Size	282mm×104mm×47mm/11"×4.1"×1.85"			
Product Weight	570g/1.26lb			
Certificate	RoHS			
Safety Rating	CAT II 1000V			

- Accessories Included
- Test Leads

K type Thermocouple (MS2000G)

Wrapping Case

Battery and User's manual



MS2000G

MS2101 MS2001 / MS2001C

DIGITAL AC/DC CLAMP METER



MS2001



V DC 1000V
AC 750V

Ø 42mm/1.7"

A DC 1000A
AC 1000A

Specifications	Range	Resolution	MS2001 MS2001C MS2101		
			Accuracy		
DC Voltage	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V			±(0.7%+1)
	1000V	1V	±(1.0%+2)	±(1.0%+2)	±(0.8%+3)
AC Voltage	4V/40V/400V	1mV/10mV/0.1V			±(0.8%+5)
	750V	1V	±(1.0%+5)	±(1.0%+5)	±(1.0%+10)
DC Current	400A/1000A	0.1A/1A			±(3.0%+3)
AC Current	20A/200A	0.01A/0.1A	±(2.0%+5)	±(2.0%+5)	
	1000A	1A	±(2.0%+7)	±(2.0%+7)	
	400A/1000A	0.1A/1A			±(3.0%+3)
Resistance	200Ω/2000Ω	0.1Ω/1Ω	±(1.0%+3)	±(1.0%+3)	
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ			±(1.2%+1)
	40MΩ	10kΩ			±(2.0%+3)
Capacitance	4nF/40nF/400nF	1pF/10pF/0.1nF			±(4.0%+10)
	4μF/40μF/100μF	1nF/10nF/100nF			±(4.0%+10)
Frequency	40Hz/400Hz/4kHz	0.01Hz/0.1Hz/1Hz			±(2.0%+1)
	40kHz/100kHz	10Hz/0.1kHz			±(2.0%+1)
Duty Cycle	0.1%~99.9%	0.10%			±(2.0%+2)
Temperature	-40°C~0°C	1°C		±(1.0%+6)	±(1.0%+6)
	1°C~400°C	1°C		±(1.0%+3)	±(1.0%+3)
	401°C~750°C	1°C		±(1.0%+5)	±(1.0%+5)
Features					
Display	counts		2000	2000	4000
Jaw Opening			Φ42mm/1.7"	Φ42mm/1.7"	Φ42mm/1.7"
Auto Ranging	Auto & Manual				•
APO	Auto Power Off				•
Diode	Open Voltage		3.0V		2.2V
Continuity	Continuity Buzzer		<60Ω	<60Ω	<50±20Ω
Data Hold			•	•	•
Backlight	Display Backlight		•	•	•
LBD	Low Battery Display		•	•	•
General					
Power Supply	1×9V 6F22 Battery				
Product Size	250mm×99mm×43mm/9.8"×3.9"×1.7"				
Product Weight	416g/0.92lb				
Certification	RoHS				
Safety Rating	CAT II 1000V/CAT III 600V				

- Accessories Included
- Test leads
 - K type thermocouple (MS2001C / MS2101)
 - Carry bag
 - Battery and User's manual

MS2030B MS2030A / MS2030

DIGITAL AC CLAMP METER



V DC 600V
AC 600V

Ø 28mm/1.1"

A AC 600A

Specifications	Range	Resolution	MS2030 MS2030A MS2030B		
			Accuracy		
DC Voltage	600V	1V	±(1.0%+3)	±(1.0%+3)	
	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V			±(0.8%+3)
AC Voltage	600V	1V	±(1.5%+10)	±(1.5%+10)	
	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V			±(1.0%+5)
AC Current	2A/20A	1mA/10mA	±(2.0%+10)	±(2.0%+10)	
	200A	0.1A		±(2.0%+5)	
	400A	1A	±(2.0%+5)		
	4A/40A/400A/600A	1mA/10mA/0.1A/1A			±(2.5%+5)
Resistance	2kΩ	1Ω	±(1.0%+5)	±(1.0%+5)	
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ			±(1.0%+5)
	40MΩ	10kΩ			±(2.0%+5)
Capacitance	5nF	1pF			±(4.0%+5)
	50nF/500nF/5μF/50μF/100μF	10pF/0.1nF/1nF/10nF/0.1μF			±(3.0%+3)
Frequency	50Hz/500Hz/5kHz/10kHz	0.01Hz/0.1Hz/1Hz/10Hz			±(1.0%+5)
Duty Cycle	0.1%~99.9%	0.1%			±(2.0%)
Temperature	-20°C~1000°C	1°C			±(3.0%+3)
	-4°F~1832°F	1°F			±(3.0%+3)
Features					
Display	counts		2000	2000	4000
Jaw Opening			Φ28mm/1.1"	Φ28mm/1.1"	Φ28mm/1.1"
Auto Ranging	Auto & Manual				•
APO	Auto Power Off				•
Diode	Open Voltage		4.5V	3.5V	1.5V
Continuity	Continuity Buzzer		<70Ω	<70Ω	<50±20Ω
Data Hold			•	•	•
Backlight	Display Backlight			•	•
Work Light				•	•
NCV	Non-Contact Voltage Detector			•	•
LBD	Low Battery Display		•	•	•
General					
Power Supply	3×1.5V AAA Batteries				
Product Size	198mm×79mm×38mm/7.8"×3.1"×1.5"				
Product Weight	195g/0.43lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 600V				



- Accessories Included
- Test leads
 - K type thermocouple (MS2030B)
 - Carry bag
 - Battery and User's manual



MS2028B MS2028A

DIGITAL AC CLAMP METER



- Accessories Included
- Test leads
 - K type thermocouple (MS2028B)
 - Carry bag
 - Battery and User's manual



V DC 600V
AC 600V

Ø 26mm/1.0"

A AC 600A

		MS2028A MS2028B	
Specifications	Range	Resolution	Accuracy
DC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(0.8%+2)
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(0.8%+2)
	600V	1V	±(1.0%+2) ±(1.0%+2)
AC Voltage	2V/20V/200V	1mV/10mV/0.1V	±(1.0%+5)
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(1.0%+10)
	600V	1V	±(1.2%+5) ±(1.2%+10)
AC Current	2A(<0.5A)	1mA	±(3.5%+20)
	2A	1mA	±(3.0%+10)
	20A	10mA	±(3.0%+10)
	200A	0.1A	±(2.5%+10)
	4A(<0.5A)	1mA	±(3.5%+20)
	4A	1mA	±(3.0%+20)
	40A(<5A)	10mA	±(3.0%+10)
	40A	10mA	±(2.5%+10)
	400A	0.1A	±(2.5%+10)
	600A	1A	±(1.5%+5) ±(1.5%+5)
Resistance	200Ω/2kΩ/20kΩ/200kΩ/2MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.2%+2)
	20MΩ	10kΩ	±(2.0%+5)
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.2%+2)
	40MΩ	10kΩ	±(2.0%+5)
Capacitance	50nF/500nF/5μF/50μF/100μF	10pF/0.1nF/1nF/10nF/0.1μF	±(4.0%+10)
Frequency	50Hz/500Hz/5kHz	0.01Hz/0.1Hz/1Hz	±(1.0%+5)
	50kHz/100kHz	10Hz/100Hz	±(1.0%+5)
	Duty Cycle	0.1%~99.9%	±(2.0%+5)
Temperature	-20°C~750°C	1°C	±(2.0%+2)
Features			
Display	counts	2000	4000
Jaw Opening		Φ26mm/1.0"	Φ26mm/1.0"
Auto Ranging	Auto & Manual	•	•
APO	Auto Power Off	•	•
Diode	Open Voltage	1.5V	1.5V
Continuity	Continuity Buzzer	<50Ω	<50±20Ω
True RMS	True root mean square	•	
MAX	Maximum Measurement	•	
Data Hold		•	•
Backlight	Display Backlight	•	•
LBD	Low Battery Display	•	•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	208mm×78mm×35mm/8.2"×3.1"×1.4"		
Product Weight	245g/0.54lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

MS2128A MS2128 / MS2108T

DIGITAL AC/DC CLAMP METER

MASTECH®



V DC 600V
AC 600V

Ø 26mm/1.0"

A DC 400A
AC 400A

		MS2108T MS2128 MS2128A		
Specifications	Range	Resolution	Accuracy	
DC Votage	660mV/6.6V/66V	0.1mV/0.001V/0.01V	±(0.8%+3)	
	400mV	0.1mV		
	4V/40V/400V	0.001V/0.01V/0.1V		
	600V	0.1V	±(1.0%+5)	±(0.8%+2)
AC Votage	660mV	0.1mV	±(1.5%+10)	
	6.6V/66V	0.001V/0.01V	±(1.2%+5)	
	4V/40V/400V	0.001V/0.01V/0.1V		
	600V	0.1V	±(1.5%+10)	±(1.0%+4)
DC Current	66A/600A	0.01A/0.1A	±(3.0%+10)	
AC Current	40A/400A	0.01A/0.1A		
	66A/600A	0.01A/0.1A	±(3.0%+10)	
Inrush Current	66A/600A	0.01A/0.1A	±(10.0%+60)	
Resistance	660Ω/6.6kΩ/66kΩ	0.1Ω/0.001kΩ/0.01kΩ	±(1.2%+2)	
	660kΩ/6.6MΩ	0.1kΩ/0.001MΩ	±(1.2%+2)	
	66MΩ	0.1MΩ	±(2.0%+5)	
	400Ω/4kΩ/40kΩ	0.1Ω/0.001kΩ/0.01kΩ		
	400kΩ/4MΩ	0.1kΩ/0.001MΩ		
	40MΩ	0.01MΩ		
Capacitance	6.6μF	0.001μF	±(4.0%+50)	
	66μF/660μF/6.6mF/66mF	0.01μF/0.1μF/0.001mF/0.01mF	±(4.0%+3)	
	10nF/100nF/1000nF/10μF	0.001nF/0.01nF/0.1nF/0.001μF	±(5.0%+5)	
	100μF/1000μF/10mF/100mF	0.01μF/0.1μF/0.001mF/0.01mF	±(5.0%+5)	
	40nF/400nF/4μF	0.01nF/0.1nF/0.001μF		±(4.0%+5)
	40μF/400μF/4000μF	0.01μF/0.1μF/1μF		±(4.0%+5)
Frequency (A)	660Hz/1kHz	0.1Hz/0.001kHz	±(1.5%+5)	
	100Hz/1kHz	0.1Hz/0.001kHz		±(1.5%+5)
	>1kHz	0.01kHz	Referance	Referance
Frequency (V)	660Hz/6.6kHz/10kHz	0.1Hz/0.001kHz/0.01kHz	±(1.5%+5)	
	100Hz/1kHz/10kHz	0.1Hz/0.001kHz/0.01kHz		±(1.5%+5)
	>10kHz	0.01kHz	Referance	Referance
Frequency (Hz/Duty)	10Hz/100Hz/1000Hz/10kHz/100kHz/1000kHz/10MHz	0.001Hz/0.01Hz/0.1Hz/1Hz		±(0.5%+3)
		0.01kHz/0.1kHz/0.001MHz		±(0.5%+3)
Duty Cycle	10%~95%	0.10%	±3.0%	±3.0%
Features				
Display	counts	6600	6600	4000
Jaw Opening		Φ26mm/1.0"	Φ26mm/1.0"	Φ26mm/1.0"
Auto Ranging	Auto & Manual	•	•	•
APO	Auto Power Off	•	•	•
REL	Relative Measurement			•
Inrush	100ms Current Integral	•	•	
True RMS	True root mean square	•	•	
Diode	Open Voltage	3.3V	3.2V	3V
Continuity Buzzer	<50±20Ω	•	•	•
MAX/MIN	MAX/MIN Measurement	•	•	•
Data Hold		•	•	•
Display Backlight		•	•	•
Work Light		•	•	•
LBD	Low Battery Display	•	•	•
General				
Power Supply	3×15V AAA Batteries			
Product Size	208mm×78mm×53mm/8.2"×3.1"×1.4"			
Product Weight	245g/0.54b			
Certification	CE/ETL/RoHS			
Safety Rating	CAT III 600V			



- Accessories Included
- Test Leads
 - Carry Bag
 - Battery and User's manual



MS2009C MS2009A

DIGITAL AC CLAMP METER



- Accessories Included
- Test leads
 - K type thermocouple (MS2009C)
 - Carry bag
 - Battery and User's manual



V DC 600V
AC 600V

A AC 600A

Ø 26mm/1.0"

Specifications	Range	Resolution	MS2009A MS2009C	
			Accuracy	
DC Voltage	200mV/2V/20V/200V	0.1mV/0.001V/0.01V/0.1V	±(0.6%+3)	
	600mV/6V/60V	0.1mV/0.001V/0.01V		±(0.8%+2)
	600V	1V	±(0.8%+3)	±(1.0%+2)
AC Voltage	200mV	0.1mV	±(2.0%+3)	
	2V/20V/200V	0.001V/0.01V/0.1V	±(0.8%+5)	
	600mV/6V/60V	0.1mV/0.001V/0.01V		±(1.0%+10)
	600V	1V	±(1.0%+5)	±(1.2%+10)
AC Current	2A/20A/200A/600A	0.001A/0.01A/0.1A/1A	±(2.0%+5)	
	6A/60A/600A	0.001A/0.01A/0.1A		±(2.5%+10)
Resistance	200Ω/2kΩ/20kΩ/200kΩ/2MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ/1kΩ	±(0.8%+4)	
	20MΩ	0.01MΩ	±(1.2%+5)	
	600Ω/6kΩ/60kΩ/600kΩ/6MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ/1kΩ		±(1.2%+2)
	60MΩ	0.01MΩ		±(2.0%+2)
Capactance	10nF/100nF/1000nF/	0.001nF/0.01nF/0.1nF		±(3.0%+10)
	10μF/100μF/1000μF	1nF/10nF/100nF		±(3.0%+10)
	10mF/60mF	10μF		±(4.0%+10)
Frequency (A)	100Hz/1kHz	0.01Hz/0.1Hz		±(1.5%+5)
Frequency (V)	100Hz/1kHz/10kHz	0.01Hz/0.1Hz/0.001kHz		±(1.5%+5)
Frequency (Hz/Duty)	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz		±(0.5%+5)
	100kHz/1MHz/10MHz	0.01kHz/0.1kHz/0.001MHz		±(0.5%+5)
Duty Cycle	0.5%~99%	0.1%		±(1.5%+15)
Temperature	-20°C~1000°C	1°C		±(2.0%+2)
	-4°F~1832°F	1°F		±(2.0%+4)
Features				
Display	counts		2000	6000
Jaw Opening		Φ26mm/1.0"	Φ26mm/1.0"	Φ26mm/1.0"
Auto Ranging	Auto & Manual		•	•
APO	Auto Power Off		•	•
NCV	Non-Contact Voltage Detector		•	•
Diode	Open Volatge	1.5V	3.2V	
Continuity Buzzer		<60Ω	<50Ω	
MAX		•		
Data Hold		•	•	
Display Backlight		•	•	
Work Light		•	•	
LBD	Low Battery Display	•	•	
General				
Power Supply	3×1.5V AAA Batteries			
Product Size	218mm×78mm×35mm/8.9"×3.1"×1.4"			
Product Weight	239g/0.53lb			
Certificate	CE / ETL / RoHS			
Safety Rating	CAT III 600V			

MS2109A

DIGITAL AC/DC CLAMP METER



V DC 600V
AC 600V

A DC 600A
AC 600A

Ø 26mm/1.0"

MS2109A			
Specifications	Range	Resolution	Accuracy
DC Voltage	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/1V	±(0.7%+2)
AC Voltage	6V/60V	0.001V/0.01V	±(0.8%+3)
	600V	1V	±(1.0%+4)
DC Current	60A/600A	0.01A/0.1A	±(3.0%+6)
AC Current	60A/600A	0.01A/0.1A	±(2.5%+6)
Resistance	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(1.2%+3)
Capacitance	40nF/400nF/4μF	0.01nF/0.1nF/0.001μF	±(4.0%+5)
	40μF/400μF/4000μF	0.01μF/0.1μF/1μF	±(4.0%+5)
Frequency (A)	100Hz/1kHz	0.01Hz/0.1Hz	±(1.5%+5)
Frequency (V)	100Hz/1kHz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
Frequency (Hz/Duty)	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz	±(0.5%+3)
	100kHz/1MHz/10MHz	0.01kHz/0.1kHz/0.001MHz	±(0.5%+3)
Duty Cycle	0.1%~99.9%	0.1%	±(3.0%+5)
Temperature	-20°C~0°C	1°C	±(3.0%+4)
	1°C~400°C	1°C	±(1.0%+3)
	401°C~1000°C	1°C	±(2.0%)
	-4°F~32°F	1°F	±(3.0%+7)
	33°F~752°F	1°F	±(1.0%+5)
	753°F~1832°F	1°F	±(2.0%)
Features			
Display	counts		6000
Jaw Opening			Φ26mm/1.0"
Auto Ranging			Auto only
APO	Auto Power Off		●
NCV	Non-Contact Voltage Detector		●
REL	Relative Measurement		●
Diode	Open Voltage		2.7V
Continuity Buzzer			<50±20Ω
MAX			●
MIN			●
Data Hold			●
Display Backlight			●
Work Light			●
LBD	Low Battery Display		●
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	218mm×78mm×35mm/8.9"×3.1"×1.4"		
Product Weight	239g/0.53lb		
Certificate	CE / ETL / RoHS		
Safety Rating	CAT III 600V		

MASTECH®



- Accessories Included
- Test leads
 - K type thermocouple
 - Carry bag
 - Battery and User's manual



MS2160

DIGITAL AC/DC CLAMP METER



- Accessories Included
- Test leads
 - K type thermocouple
 - Carry bag
 - Battery and User's manual



V DC 600V
AC 600V

Ø 24mm/0.9"

A DC 80A
AC 80A

			MS2160
Specifications	Range	Resolution	Accuracy
DC Voltage	4V/40V/400V/600V	1mV/10mV/0.1V/1V	±(0.8%+3)
AC Voltage	4V/40V/400V/600V	1mV/10mV/0.1V/1V	±(1.0%+3)
DC Current	4A/40A/80A	1mA/10mA/0.1A	±(2.5%+5)
AC Current	4A/40A/80A	1mA/10mA/0.1A	±(2.5%+5)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(0.8%+3)
	40MΩ	10kΩ	±(1.2%+3)
Capacitance	4nF/40nF/400nF/4μF	1pF/10pF/0.1nF/1nF	±(4.0%+3)
	40μF/400μF/4mF/40mF	10nF/0.1μF/1μF/10μF	±(4.0%+3)
Frequency (Clamp)	100Hz/1kHz	0.01Hz/0.1Hz	±(1.5%+5)
Frequency (Voltage)	100Hz/1kHz/10kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
Logic Frequency	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(0.5%+3)
	100kHz/1MHz/10MHz	0.01kHz/0.1kHz/1kHz	±(0.5%+3)
Duty Cycle	0.5%~99.5%	0.1%	±(3.0%)
Temperature	-20°C~1000°C	1°C	±(3.0%+3)
	-4°F~1832°F	1°F	±(3.0%+3)
Features			
Display	counts	4000	
Jaw Opening		Φ24mm/0.9"	
Auto Ranging	Auto & Manual	●	
APO	Auto Power Off	●	
NCV	Non-Contact Voltage Detector	●	
Diode	Open Voltage	3.2V	
Continuity Buzzer	<50Ω	●	
Data Hold		●	
Display Backlight		●	
Work Light		●	
LBD	Low Battery Display	●	
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	195mm×80mm×45mm/7.8"×3.1"×1.8"		
Product Weight	195g/0.43lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 600V		

MS2601

MS2600

DIGITAL AC ELECTRICAL TESTER



V DC 600V
AC 600V

Ø 12mm/0.5"

A AC 200A

MS2600 MS2601			
Specifications	Range	Resolution	Accuracy
DC Voltage	4V/40V/400V	0.001V/0.01V/0.1V	±(0.7%+1)
	1000V	1V	±(0.8%+3)
	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/0.1V	±(0.7%+3)
AC Voltage	4V/40V/400V	0.001V/0.01V/0.1V	±(0.8%+5)
	700V	1V	±(1.0%+10)
	6V/60V/600V	0.001V/0.01V/0.1V	±(0.8%+3)
LO-Z(DCV/ACV)	1V~600V	0.001V	±(2.0%+3)
DC Current	600uA/1000uA	0.1uA/1uA	±(1.0%+4)
AC Current	200A	0.1A	±(3.0%+3)
Resistance	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ/1kΩ	±(1.2%+1)
	40MΩ	0.01MΩ	±(2.0%+3)
	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(1.2%+3)
Capacitance	40nF/400nF/4μF/40μF	0.01nF/0.1nF/0.001μF/0.01μF	±(4.0%+10)
	60nF/600nF/6μF/60μF	0.01nF/0.1nF/0.001μF	±(4.0%+5)
	600μF/6000μF/60mF	0.01μF/0.1μF/1μF/0.01mF	±(4.0%+5)
Frequency (Hz/Duty)	40Hz/400Hz/4kHz	0.01Hz/0.1Hz/0.001kHz/	±(2.0%+1)
	40kHz/100kHz	0.01kHz/0.1kHz	±(2.0%+1)
Frequency (Hz/Duty)	60Hz/600Hz/6kHz/60kHz	0.01Hz/0.1Hz/0.001kHz/0.01kHz	±(0.3%+5)
	600kHz/6MHz/60MHz	0.1kHz/0.001MHz/0.01MHz	±(0.3%+5)
Frequency (A)	100Hz/1000Hz	0.01Hz/0.1Hz	±(1.5%+5)
Frequency (V)	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
Duty Cycle	0.1%~99.9%	0.1%	±(3.0%)
	5%~95%	0.1%	±(0.3%)
Temperature	-20°C~0°C/-4°F~32°F	1°C/1°F	±(3.0%+2)
	0°C~400°C/32°F~752°F	1°C/1°F	±(2.0%+2)
Features			
Display	counts	4000	6000
Jaw Opening		Φ12mm/0.5"	Φ12mm/0.5"
Auto Ranging	Auto & Manual	●	●
APO	Auto Power Off	●	●
NCV	Non-Contact Voltage Detector		●
REL	Relative Measurement	●	
Diode	Open Voltage	1.5V	3.2V
Continuity Buzzer		<50±20Ω	<50Ω
Data Hold		●	●
Display Backlight		●	●
Work Light			●
LBD	Low Battery Display	●	●
General			
Power Supply	1×9V 6F22 Battery		
Model Number	MS2600	MS2601	
Product Weight	230g/0.5lb	265g/0.58lb	
Product Size	192mm×68mm×43mm/	201mm×65mm×43mm/	
	7.56"×2.67"×1.7"	7.7"×2.6"×1.7"	
Certificate	RoHS	CE / ETL /RoHS	
Safety Rating	CAT III 600V	CAT III 600V	

- Accessories Included
- Test leads
 - K type thermocouple (MS2601)
 - Carry bag
 - Battery and User's manual



MS2600



MS2140A



V DC 1000V
AC 1000V

Ø 40mm/1.6"

A DC 1000A
AC 1000A

Accessories Included



Specifications	Range	Resolution	MS2140A MS2140B MS2140C		
			Accuracy		
DC Voltage	600mV/6V/60V/600V/1000V	0.1mV/0.001V/0.01V/0.1V/1V	±(0.5%+3)		
AC Voltage	600mV/6V/60V/600V/1000V	0.1mV/0.001V/0.01V/0.1V/1V	±(0.8%+3)		
DC Current	60A/600A	0.01A/0.1A	±(3.0%+10)		
	600A/1000A	0.1A/1A		±(3.0%+10)	±(3.0%+10)
AC Current	60A/600A	0.01A/0.1A	±(1.8%+10)		
	600A/1000A	0.1A/1A		±(1.8%+10)	±(1.8%+10)
Inrush Current	60A/600A	0.01A/0.1A	±(10%+60)		
	600A/1000A	0.1A/1A		±(10%+60)	±(10%+60)
Resistance	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)		
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(1.2%+3)		
Capacitance	6nF	0.001nF	±(5.0%+5)		
	60nF/600nF/6μF/60μF	0.01nF/0.1nF/0.001μF/0.01μF	±(4.0%+5)		
	600μF/6mF/60mF	0.1μF/0.001mF/0.01mF	±(4.0%+5)		
Frequency (A)	60Hz/600Hz/1kHz	0.01Hz/0.1Hz/1Hz		±(1.5%+5)	±(1.5%+5)
	60Hz/600Hz/6kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)		
Frequency (V)	60Hz/600Hz/6kHz/10kHz	0.01Hz/0.1Hz/1Hz/0.01kHz		±(1.5%+5)	±(1.5%+5)
	60Hz/600Hz/6kHz/60kHz	0.01Hz/0.1Hz/1Hz/0.01kHz	±(1.5%+5)		
Frequency (Hz/Duty)	60Hz/600Hz/6kHz/60kHz	0.01Hz/0.1Hz/1Hz/0.01kHz	±(0.3%+5)		
	600kHz/6MHz/60MHz	0.1kHz/1kHz/0.01MHz	±(0.3%+5)		
Duty Cycle	5%~95%	0.1%	±(3.0%)		
DC μA Current	200μA/2000μA	0.1μA/1μA	±(1.0%+5)		
AC μA Current	200μA/2000μA	0.1μA/1μA	±(1.0%+5)		
Temperature (K type)	-40°C~10°C	0.1°C	±(5.0%+15)		
	-40°F~14°F	0.1°F	±(5.0%+33)		
	-10°C~500°C	0.1°C	±(1.0%+8)		
	-14°F~932°F	0.1°F	±(1.0%+8)		
Temperature (IR-T)	-20°C~0°C	0.1°C			±(3.5°C)
	-4°F~32°F	0.1°F			±(6.5°F)
	0°C~350°C	0.1°C			±(2.5%+3°C)
	32°F~662°F	0.1°F			±(5.0%+5°F)
Features					
Display	counts		6000		
Jaw Opening			Φ40mm/1.6"		
Auto Ranging	Auto & Manual		•		
APO	Auto Power Off		•		
NCV	Non-Contact Voltage Detector		•		
Diode	Open Voltage		2.8V	2.8V	2.8V
Continuity Buzzer			<30Ω	<30Ω	<50Ω
MAX/MIN			•		
Data Hold			•		
Inrush Hold			•		
Display Backlight			•		
Work Light			•		
REL	Relative Measurement		•		
LBD	Low Battery Display		•		
Dual Display			•		
Bar Graph	Segments Bar Graph		•		
IR-T	Sampling time 300mS / IR D:S : 6:1 / IR Emissivity 0.95				•
General					
Model	MS2140A / MS2140B		MS2140C		
Power Supply	3×1.5V AAA Batteries		3×1.5V AAA Batteries 2×LR44 Batteries		
Product Size	233mm×86mm×32mm/9.2"×3.4"×1.3"		233mm×108mm×32mm/9.2"×4.2"×1.3"		
Product Weight	350g/0.77lb		380g/0.84lb		
Certificate	RoHS		RoHS		
Safety Rating	CAT III 600V		CAT III 600V		

MS2025C MS2025A

DIGITAL AC CLAMP METER with TRMS / NCV



- Accessories Included
- Test leads
 - K type thermocouple (MS2025C)
 - Carry bag
 - Battery and User's manual



V DC 1000V
AC 750V

Ø 40mm/1.6"

A AC 1000A

		MS2025A		MS2025C
Specifications	Range	Resolution	Accuracy	
DC Votage	60mV/600mV/6V/60V/600V	0.01mV/0.1mV/0.001V/0.01V/0.1V	±(0.5%+5)	
	660mV	0.1mV		±(0.8%+2)
	6.6V/66V/660V	0.001V/0.01V/0.1V		±(0.7%+2)
	1000V	1V	±(0.8%+4)	±(0.8%+2)
AC Votage	60mV/600mV/6V/60V/600V	0.01mV/0.1mV/0.001V/0.01V/0.1V	±(0.6%+5)	
	660mV	0.1mV		±(1.5%+10)
	6.6V/66V/660V	0.001V/0.01V/0.1V		±(0.8%+3)
	750V	1V	±(0.8%+4)	±(1.0%+4)
AC Current	60A/600A/1000A	0.01A/0.1A/1A	±(2.0%+8)	
	66A/660A/1000A	0.01A/0.1A/1A		±(2.5%+6)
Resistance	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)	
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(1.2%+3)	
	660Ω/6.6kΩ/66kΩ/660kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ		±(0.8%+3)
	6.6MΩ/66MΩ	0.001MΩ/0.01MΩ		±(1.2%+3)
Capacitance	10nF/100nF/1000nF/10μF	0.001nF/0.01nF/0.1nF/0.001μF	±(3.0%+5)	
	100μF/1000μF/10mF/100mF	0.01μF/0.1μF/0.001mF/0.01mF	±(3.0%+5)	
	6.6nF/66nF/660nF/6.6μF	0.001nF/0.01nF/0.1nF/0.001μF		±(4.0%+5)
	66μF/660μF/6.6mF/66mF	0.01μF/0.1μF/0.001mF/0.01mF		±(4.0%+5)
Frequency (A)	100Hz/1000Hz	0.01Hz/0.1Hz	±(1.5%+5)	
	66Hz/660Hz	0.01Hz/0.1Hz		±(1.5%+5)
Frequency (V)	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)	
	66Hz/660Hz/6.6kHz	0.01Hz/0.1Hz/0.001kHz		±(1.5%+5)
Logic Frequency	10Hz/100Hz/1000Hz/10kHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz	±(0.3%+5)	
	100kHz/1000kHz/10MHz	0.01kHz/0.1kHz/0.001MHz	±(0.3%+5)	
	66Hz/660Hz/6.6kHz/66kHz	0.01Hz/0.1Hz/0.001kHz/0.01kHz		±(0.5%+2)
	660kHz/6.6MHz/66MHz	0.1kHz/0.001MHz/0.01MHz		±(0.5%+2)
Duty Cycle	0.1%~99.9%	0.1%	±(3.0%)	±(3.0%)
Temperature	-20°C~1000°C/-4°F~1832°F	1°C/1°F		±(3.0%+3)
Features				
Display	counts	6000	6600	
Jaw Opening		Φ40mm/1.6"	Φ40mm/1.6"	
Auto Ranging	Auto & Manual	•	•	
APO	Auto Power Off	•	•	
NCV	Non-Contact Voltage Detector	•	•	
REL	Relative Measurement	•	•	
Diode	Open Voltage	3.2V	3.2V	
Continuity Buzzer	<50Ω	•	•	
Data Hold		•	•	
Display Backlight		•	•	
MAX/MIN	Max/Min Measurement	•	•	
Work Light		•	•	
True RMS	True Root Mean Square	•	•	
LBD	Low Battery Display	•	•	
Dual Display				•
Bar Graph	Segments Bar Graph			•
General				
Power Supply	1×9V 6F22 Battery			
Product Size	238mm×92mm×50mm/9.37"×3.6"×1.9"			
Product Weight	390g/0.86lb			
Certification	CE/ETL/RoHS			
Safety Rating	CAT III 1000V/CAT IV 600V			

MS2125A MS2125B

DIGITAL AC/DC CLAMP METER with TRMS / NCV



V DC 1000V
AC 750V

Ø 40mm/1.6"

A DC 1000A
AC 1000A

		MS2125A		MS2125B
Specifications	Range	Resolution	Accuracy	
DC Voltage	60mV/600mV/6V/60V/600V	0.01mV/0.1mV/0.001V/0.01V/0.1V	±(0.5%+5)	
	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/0.1V		±(0.5%+5)
	1000V	1V	±(0.8%+4)	±(0.8%+4)
			±(0.6%+5)	
AC Voltage	60mV/600mV/6V/60V/600V	0.01mV/0.1mV/0.001V/0.01V/0.1V	±(0.8%+4)	±(0.8%+5)
	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/0.1V		±(0.8%+5)
	750V	1V	±(0.8%+4)	±(0.8%+4)
			±(2.0%+8)	±(2.5%+8)
DC Current	60A/600A/1000A	0.01A/0.1A/1A	±(2.0%+8)	±(2.5%+8)
AC Current	60A/600A/1000A	0.01A/0.1A/1A	±(2.0%+8)	±(2.5%+8)
Inrush Current	60A/600A/1000A	0.01A/0.1A/1A	±(5.0%+60)	±(10%+60)
Resistance	600Ω/6kΩ/60kΩ/600kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)	±(0.8%+3)
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(2.0%+5)	±(1.2%+3)
	10nF/100nF/1000nF/10μF	0.001nF/0.01nF/0.1nF/0.001μF	±(3.0%+5)	
	100μF/1000μF/10mF/100mF	0.01μF/0.1μF/0.001mF/0.01mF	±(3.0%+5)	
Capacitance	6nF/60nF/600nF/6μF	0.001nF/0.01nF/0.1nF/0.001μF		±(3.0%+5)
	60μF/600μF/6mF/60mF	0.01μF/0.1μF/0.001mF/0.01mF		±(3.0%+5)
	Frequency (A)	100Hz/1000Hz	0.01Hz/0.1Hz/	±(1.5%+5)
	Frequency (V)	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
Frequency (Hz/Duty)	10Hz/100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/0.001kHz/0.01kHz	±(0.3%+5)	
Frequency (A)	100kHz/1000kHz/10MHz	0.1kHz/0.001MHz/0.01MHz	±(0.3%+5)	
Frequency (V)	60Hz/600Hz/1kHz	0.01Hz/0.1Hz/1Hz		±(1.5%+5)
Frequency (Hz/ Duty)	60Hz/600Hz/6kHz/60kHz	0.01Hz/0.1Hz/1Hz/10Hz		±(1.5%+5)
Frequency (V)	60Hz/600Hz/6kHz/60kHz	0.01Hz/0.1Hz/0.001kHz/0.01kHz		±(0.3%+5)
Frequency (Hz/ Duty)	600kHz/6MHz/60MHz	0.1kHz/0.001MHz/0.01MHz		±(0.3%+5)
Duty Cycle	0.1%~99.9%	0.1%	±(3.0%)	
	10%~90%	0.1%		±(3.0%)
Features				
Display	counts	6000	6000	
Jaw Opening		Φ40mm/1.6"	Φ40mm/1.6"	
Auto Ranging	Auto & Manual	•	•	
APO	Auto Power Off	•	•	
NCV	Non-Contact Voltage Detector	•	•	
REL	Relative Measurement	•	•	
Diode	Open Voltage	3.2V	2.7V	
Continuity Buzzer		<50Ω	<50Ω	
MAX/MIN		•	•	
Data Hold		•	•	
Display Backlight		•	•	
Work Light		•	•	
True RMS	True Root Mean Square	•	•	
LBD	Low Battery Display	•	•	
Inrush	Inrush Current Mesurement	•	•	
Dual Display				•
Bar Graph	Segments Bar Graph			•
USB interface	Windows OS			•
General				
Power Supply	1×9V 6F22 Battery			
Product Size	238mm×92mm×50mm/9.37"×3.6"×1.9"			
Product Weight	386g/0.85lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 1000V CAT IV 600V			



- Accessories Included
- Test Leads
 - Carry Bag
 - Battery and User's manual



MS2026R MS2026

DIGITAL AC CLAMP METER



- Accessories Included
- Test leads
 - Carry bag
 - Battery and User's manual



V DC 1000V
AC 750V

Ø 40mm/1.6"

A DC 1000A

MS2026 MS2026R			
Specifications	Range	Resolution	Accuracy
DC Votage	600mV/6V/60V/600V	0.1mV/0.001V/0.01V/0.1V	±(0.7%+3)
	1000V	1V	±(0.8%+2)
AC Votage	6V/60V/600V	0.001V/0.01V/0.1V	±(0.8%+3)
	750V	1V	±(1.0%+4)
AC Current	6A/60A/600A/1000A	0.001A/0.01A/0.1A/1A	±(2.0%+6)
	600Ω/6kΩ/60kΩ/600kΩ	0.001Ω/0.01kΩ/0.1kΩ	±(0.8%+3)
Resistance	6MΩ/60MΩ	0.001MΩ/0.1MΩ	±(1.2%+3)
	40nF/400nF/4μF	0.01nF/0.1nF/0.001μF	±(4.0%+5)
Capacitance	40μF/400μF/4000μF	0.01μF/0.1μF/1μF	±(4.0%+5)
	100Hz/1000Hz	0.01Hz/0.1Hz	±(1.5%+5)
Frequency (A)	>1kHz	0.001kHz	Reference
	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
Frequency (V)	>10kHz	0.01kHz	Reference
	10Hz/100Hz/1000Hz/10kHz/100kHz/1000kHz/10MHz	0.001Hz/0.01Hz/0.1Hz/0.001kHz	±(0.3%+5)
Duty Cycle	0.1%~99%	0.1%	±3.0%
Features			
Display	counts	6000	
Jaw Opening		Φ40mm/1.6"	
Auto Ranging	Auto & Manual	•	
APO	Auto Power Off	•	
Diode	Open Voltage	3.3V	
Continuity Buzzer		<50±20Ω	
MAX/MIN		•	
Data Hold		•	
LBD	Low Battery Display	•	
Display Backlight		•	
Work Light		•	
True RMS	True Root Mean Square		•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	222mm×86mm×32mm/8.74"×3.38"×1.26"		
Product Weight	323g/0.71lb		
Certificate	RoHS		
Safety Rating	CAT III 600V		

MS2138R MS2138

DIGITAL AC/DC CLAMP METER

MASTECH®



- Accessories Included
- Test leads
 - Carry bag
 - Battery and User's manual



V DC 600V
AC 600V

Ø 40mm/1.6"

A DC 1000A
AC 1000A

MS2138 MS2138R			
Specifications	Range	Resolution	Accuracy
DC Votage	400mV	0.1mV	±(1.0%+2)
	4V/40V/400V	0.001V/0.01V/0.1V	±(0.7%+2)
	600V	1V	±(0.8%+2)
AC Votage	400mV/4V/40V/400V	0.0001V/0.001V/0.01V/0.1V	±(0.8%+3)
	600V	1V	±(1.0%+4)
DC Current	40A/400A/1000A	0.01A/0.1A/1A	±(3.0%+6)
	40A/400A/1000A	0.01A/0.1A/1A	±(2.5%+6)
AC Current	400Ω/4kΩ/40kΩ/400kΩ	0.1Ω/0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+3)
	4MΩ/40MΩ	0.001MΩ/0.1MΩ	±(1.2%+3)
Resistance	40nF/400nF/4μF	0.01nF/0.1nF/0.001μF	±(4.0%+5)
	40μF/400μF/4000μF	0.01μF/0.1μF/1μF	±(4.0%+5)
Capacitance	100Hz/1kHz	0.01Hz/0.1Hz	±(1.5%+5)
	>1kHz	0.001kHz	Reference
Frequency (A)	100Hz/1kHz/10kHz	0.01Hz/0.1Hz/0.001kHz	±(1.5%+5)
	>10kHz	0.01kHz	Reference
Frequency (V)	10Hz/100Hz/1kHz/10kHz	0.001Hz/0.01Hz/0.1Hz/1Hz	±(0.5%+2)
	100kHz/1MHz/10MHz	0.01kHz/0.1kHz/0.001MHz	±(0.5%+2)
Duty Cycle	0.1%~99%	0.1%	±3.0%
Features			
Display	counts	4000	
Jaw Opening		Φ40mm/1.6"	
Auto Ranging	Auto & Manual	•	
APO	Auto Power Off	•	
Diode	Open Voltage	2.8V	
Continuity Buzzer	<50±20Ω	•	
REL	Relative Measurement	•	
Data Hold		•	
LBD	Low Battery Display	•	
Display Backlight		•	
Work Light		•	
Bar Graph		•	
True RMS	True Root Mean Square		•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	222mm×86mm×32mm/8.74"×3.38"×1.26"		
Product Weight	323g/0.71lb		
Certificate	RoHS		
Safety Rating	CAT III 600V		

HIGH SENSITIVITY AC LEAKAGE CLAMP METER



- Accessories Included
- Test leads
 - K type thermocouple
 - Carry bag
 - Battery and User's manual



V DC 600V
AC 600V

Ø 32mm/1.2"

A AC 600V

		MS2010A MS2010B	
Specifications	Range	Resolution	Accuracy
DC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/0.1V/1V	±(0.7%+3)
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V	±(0.7%+3)
	600V	1V	±(0.8%+5)
AC Voltage	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/0.1V/1V	±(0.8%+5)
	200mV/2V/20V/200V/600V	0.1mV/1mV/10mV/0.1V/1V	±(2.0%+10)
	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V	±(0.8%+5)
	400mV/4V/40V/400V/600V	0.1mV/1mV/10mV/0.1V/1V	±(2.0%+10)
AC Current	20mA/200mA/2A/20A/200A	0.01mA/0.1mA/1mA/	±(1.0%+8)
	20mA/200mA/2A/20A/200A	0.01mA/0.1mA/1mA/	±(3.0%+10)
	40mA/400mA/4A/40A/400A	0.01mA/0.1mA/1mA/	±(1.0%+8)
	600A(50~60Hz)	1A	±(1.5%+3)
			±(1.5%+3)
Resistance	200Ω/2kΩ/20kΩ/200kΩ/2MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.0%+2)
	20MΩ	10kΩ	±(2.0%+5)
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ	±(1.0%+2)
	40MΩ	10kΩ	±(2.0%+5)
Capacitance	50nF/500nF/5μF/50μF/100μF	0.01nF/0.1nF/1nF/0.01μF/0.1μF	±(2.0%+5)
Frequency (A)	10Hz	0.001Hz	±(2.0%+5)
	100Hz/1000Hz/2kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
Frequency (V)	10Hz	0.001Hz	±(2.0%+5)
	100Hz/1000Hz/10kHz	0.01Hz/0.1Hz/1Hz	±(1.5%+5)
	100kHz	10Hz	±(2.0%+5)
Duty Cycle	1%~99.9%	0.1%	±(3.0%)
	-20°C~0°C	1°C	±(5.0%+5)
	0°C~400°C	1°C	±(1.5%+3)
	400°C~1000°C	1°C	±(3.0%+3)
	-4°F~32°F	1°F	±(5.0%+5)
	32°F~752°F	1°F	±(1.5%+3)
	752°F~1832°F	1°F	±(3.0%+3)
Features			
Display	counts	2000	4000
Jaw Opening		Φ32mm/1.2"	Φ32mm/1.2"
Auto Ranging	Auto & Manual	•	•
APO	Auto Power Off	•	•
LPF	Low Pass Filter Function	•	•
REL	Relative Measurement	•	•
MAX		•	•
Diode	Open Voltage	1.8V	1.8V
Continuity	Continuity Buzzer	<30Ω	<50±20Ω
Data Hold		•	•
Backlight	Display Backlight	•	•
LBD	Low Battery Display	•	•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	260mm×92mm×55mm/10.2"×3.6"×2.16"		
Product Weight	445g/0.98lb		
Certificate	RoHS		
Safety Rating	CAT III 600V		

HIGH SENSITIVITY AC LEAKAGE CLAMP METER



Ø 31mm/1.2"

A AC 60A

MS2006B			
Specifications	Range	Resolution	Accuracy
AC Current	2mA	0.001mA	±(2.0%+10)
	20mA	0.01mA	±(2.0%+8)
	60A(<50A)	0.1A	±(2.0%+5)
	60A(>50A)	0.1A	±(3.0%+5)
Features			
Display	counts		2000
Jaw Opening			Φ31mm/1.2"
APO	Auto Power Off		•
Data Hold			•
LBD	Low Battery Display		•
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	176mm×59mm×28mm/6.9"×2.3"×1.1"		
Product Weight	150g/0.33lb		
Certificate	RoHS		
Safety Rating	CAT III 600V		

- Accessories Included
- Carry bag
 - Battery and User's manual





- Accessories Included
- Test Leads
 - Test Clip
 - Wrapping Case
 - Battery and User's manual



V AC 10V~600V Ø 26mm/1.0"

A AC 10mA~200A

MS2228			
Specifications	Range	Resolution	Accuracy
AC Votage(RMS)	10V~600V	0.1V	±(1.0%+5)
AC Current	10mA~3999mA	0.01mA	±(2.0%+5)
	4A~200A	0.01A	±(2.0%+5)
Active Power	0.10w~3.00w	0.01w	±(3.0%+5)
	3.0w~100.0w	0.1w	
	100w~3.00kw	1w	
	3.00kw~10.00kw	10w	
	10.0kw~100.0kw	100w	
	100kw~120kw	1kw	
Apparent Power	0.10VA~3.00VA	0.01VA	±(3.0%+5)
	3.0VA~100.0VA	0.1VA	
	100VA~3.00kVA	1VA	
	3.00kVA~10.00kVA	10VA	
	10.0kVA~100.0kVA	100VA	
	100kVA~120kVA	1kVA	
Reactive Power	0.10VAr~3.00VAr	0.01VAr	±(3.0%+5)
	3.0VAr~100.0VAr	0.1VAr	
	100VAr~3.00kVAr	1VAr	
	3.00kVAr~10.00kVAr	10VAr	
	10.0kVAr~100.0kVAr	100VAr	
	100kVAr~120kVAr	1kVAr	
Power Factor	0.3~1 capacitive	0.001	±(0.02%+2)
	0.3~1 inductive	0.001	±(0.02%+2)
Frequency	30Hz~1kHz	0.1Hz	(±0.5%+1)
Harmonic Measurement	Harmonic Number :1		±(3.0%+10)
	Harmonic Number :2-6		±(3.5%+10)
	Harmonic Number :7-8		±(4.5%+10)
	Harmonic Number :9-10		±(5.0%+10)
	Harmonic Number :11-15		±(7.0%+10)
Harmonic Measurement	Harmonic Number :16-20		±(10%+10)
Features			
Display	counts		6000
Jaw Opening	Φ26mm/1.0"		•
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
MAX/MIN	MAX/MIN Measurement		•
True RMS	True root mean square		•
Work Light			•
Data Hold			•
Display Backlight			•
LBD	Low Battery Display		•
General			
Power Supply	3×1.5V AAA Batteries		
Product Size	208mm×78mm×35mm/8.2"×3.1"×1.4"		
Product Weight	245g/0.54lb		
Certificate	RoHS		
Safety Rating	CAT III 600V		



V AC 600V Ø 50mm/2.0"

A AC 1000A

MS2203 MS2205			
Specifications	Range	Resolution	Accuracy
AC Votage	100V/300V/600V	0.1V	±(1.2%+5)
	80V/180V/400V/600V	0.1V/0.1V/1V/1V	±(1.0%+5)
AC Current	40A/100A/400A/1000A	0.1A/0.1A/0.1A/1A	±(2.0%+5)
	20A/40A/100A/200A/450A/1000A	0.01A/0.01A/0.1A/0.1A/1A/1A	±(2.0%+5)
Active Power	4kW/10kW/40kW/100kW	0.01kW	±(3.0%+5)
	600kW	0.1kW	±(3.0%+5)
	30kW/60kW/120kW	0.01kW/0.01kW/0.1kW	±(3.0%+5)
	150kW/300kW/600kW	0.1kW	±(3.0%+5)
Apparent Power	4kVA/10kVA/40kVA/100kVA/	0.01kVA	±(3.0%+5)
	600kVA	0.1kVA	±(3.0%+5)
	3kVA/12kVA/30kVA	0.001kVA/0.01kVA/0.01kVA	±(3.0%+5)
	120kVA/150kVA/600kVA	0.1kVA	±(3.0%+5)
Reactive Power	4kVAr/10kVAr/40kVAr/100kVAr	0.01kVAr	±(4.0%+5)
	600kVAr	0.1kVAr	±(4.0%+5)
	3kVAr/12kVAr/30kVAr	0.001kVAr/0.01kVAr/0.01kVAr	±(3.0%+5)
	120kVAr/150KVA/600kVAr	0.1kVAr	±(3.0%+5)
Power Factor	0.3~1	0.001	±(2.0%+2)
Active Energy	1kWh~9999kWh	0.001kWh	±(3.0%+2)
Frequency	20Hz~1000Hz	0.1Hz	±(0.5%)
	30Hz~1000Hz	0.1Hz	±(0.5%+1)
Harmonic Measurement (fundamental)	Harmonic Number :1		±(3.0%+10)
	Harmonic Number :2-6		±(3.5%+10)
	Harmonic Number :7-8		±(4.5%+10)
	Harmonic Number :9-10		±(5.0%+10)
	Harmonic Number :11-15		±(7.0%+10)
Harmonic Measurement (fundamental)	Harmonic Number :16-20		±(10%+10)
Features			
Display	counts		9999 6000
Jaw Opening	Φ50mm/2.0"		• •
Auto Ranging	Auto & Manual		• •
APO	Auto Power Off		• •
Data Logging	groups		28 100
True RMS	True root mean square		• •
Bar Graph			• •
MAX/MIN	MAX/MIN Measurement		• •
Data Hold			• •
Display Backlight			• •
LBD	Low Battery Display		• •
RS232 Interface	Windows OS		• •
General			
Power Supply	4×1.5V AA Batteries		
Product Size	300mm×103mm×51mm/11.8"×4.1"×2.0"		
Product Weight	640g/1.4lb		
Certiifacte	RoHS		
Safety Rating	CAT III 600V		



- Accessories Included
- Test Leads
 - Test Clip
 - Wrapping Case
 - Battery and User's manual

MS3300

MS3302

DIGITAL CLAMP TRANSDUCER



Accessories Included
Wrapping Case
Battery and User's manual




Ø 55mm/2.2"

A DC 1000A
AC 1000A

MS3300		
Specifications	Range	Accuracy
DC Current	1000A	±(3.0%+5)
AC Current	1000A	±(3.0%+5)
Output	DC 1mV / A	
	AC 1mV / A	
Features		
Jaw Opening	Φ55mm/2.2"	
True RMS	True Root Mean Square	
DCA ZERO	Zero adjust	
Frequency	DC/AC 50-60Hz	
General		
Power Supply	1×9V 6F22 Battery	
Product Size	256mm×104mm×47mm/9.3"×3.86"×1.9"	
Product Weight	520g/1.1lb	
Certificate	RoHS	
Safety Rating	CAT II 600V	

MS3302		
Specifications	Range	Accuracy
AC Current	0.1A~400A	±(2.0%+5)
Output	10mV/A	±(2.0%+5)
	1mV/A	±(2.0%+5)
Features		
Jaw Opening	Φ28mm/1.1"	
General		
Power Supply	N/A	
Product Size	143mm×64mm×30mm/5.6"×2.5"×1.2"	
Product Weight	185g/0.4lb	
Certificate	RoHS	
Safety Rating	CAT II 600V	

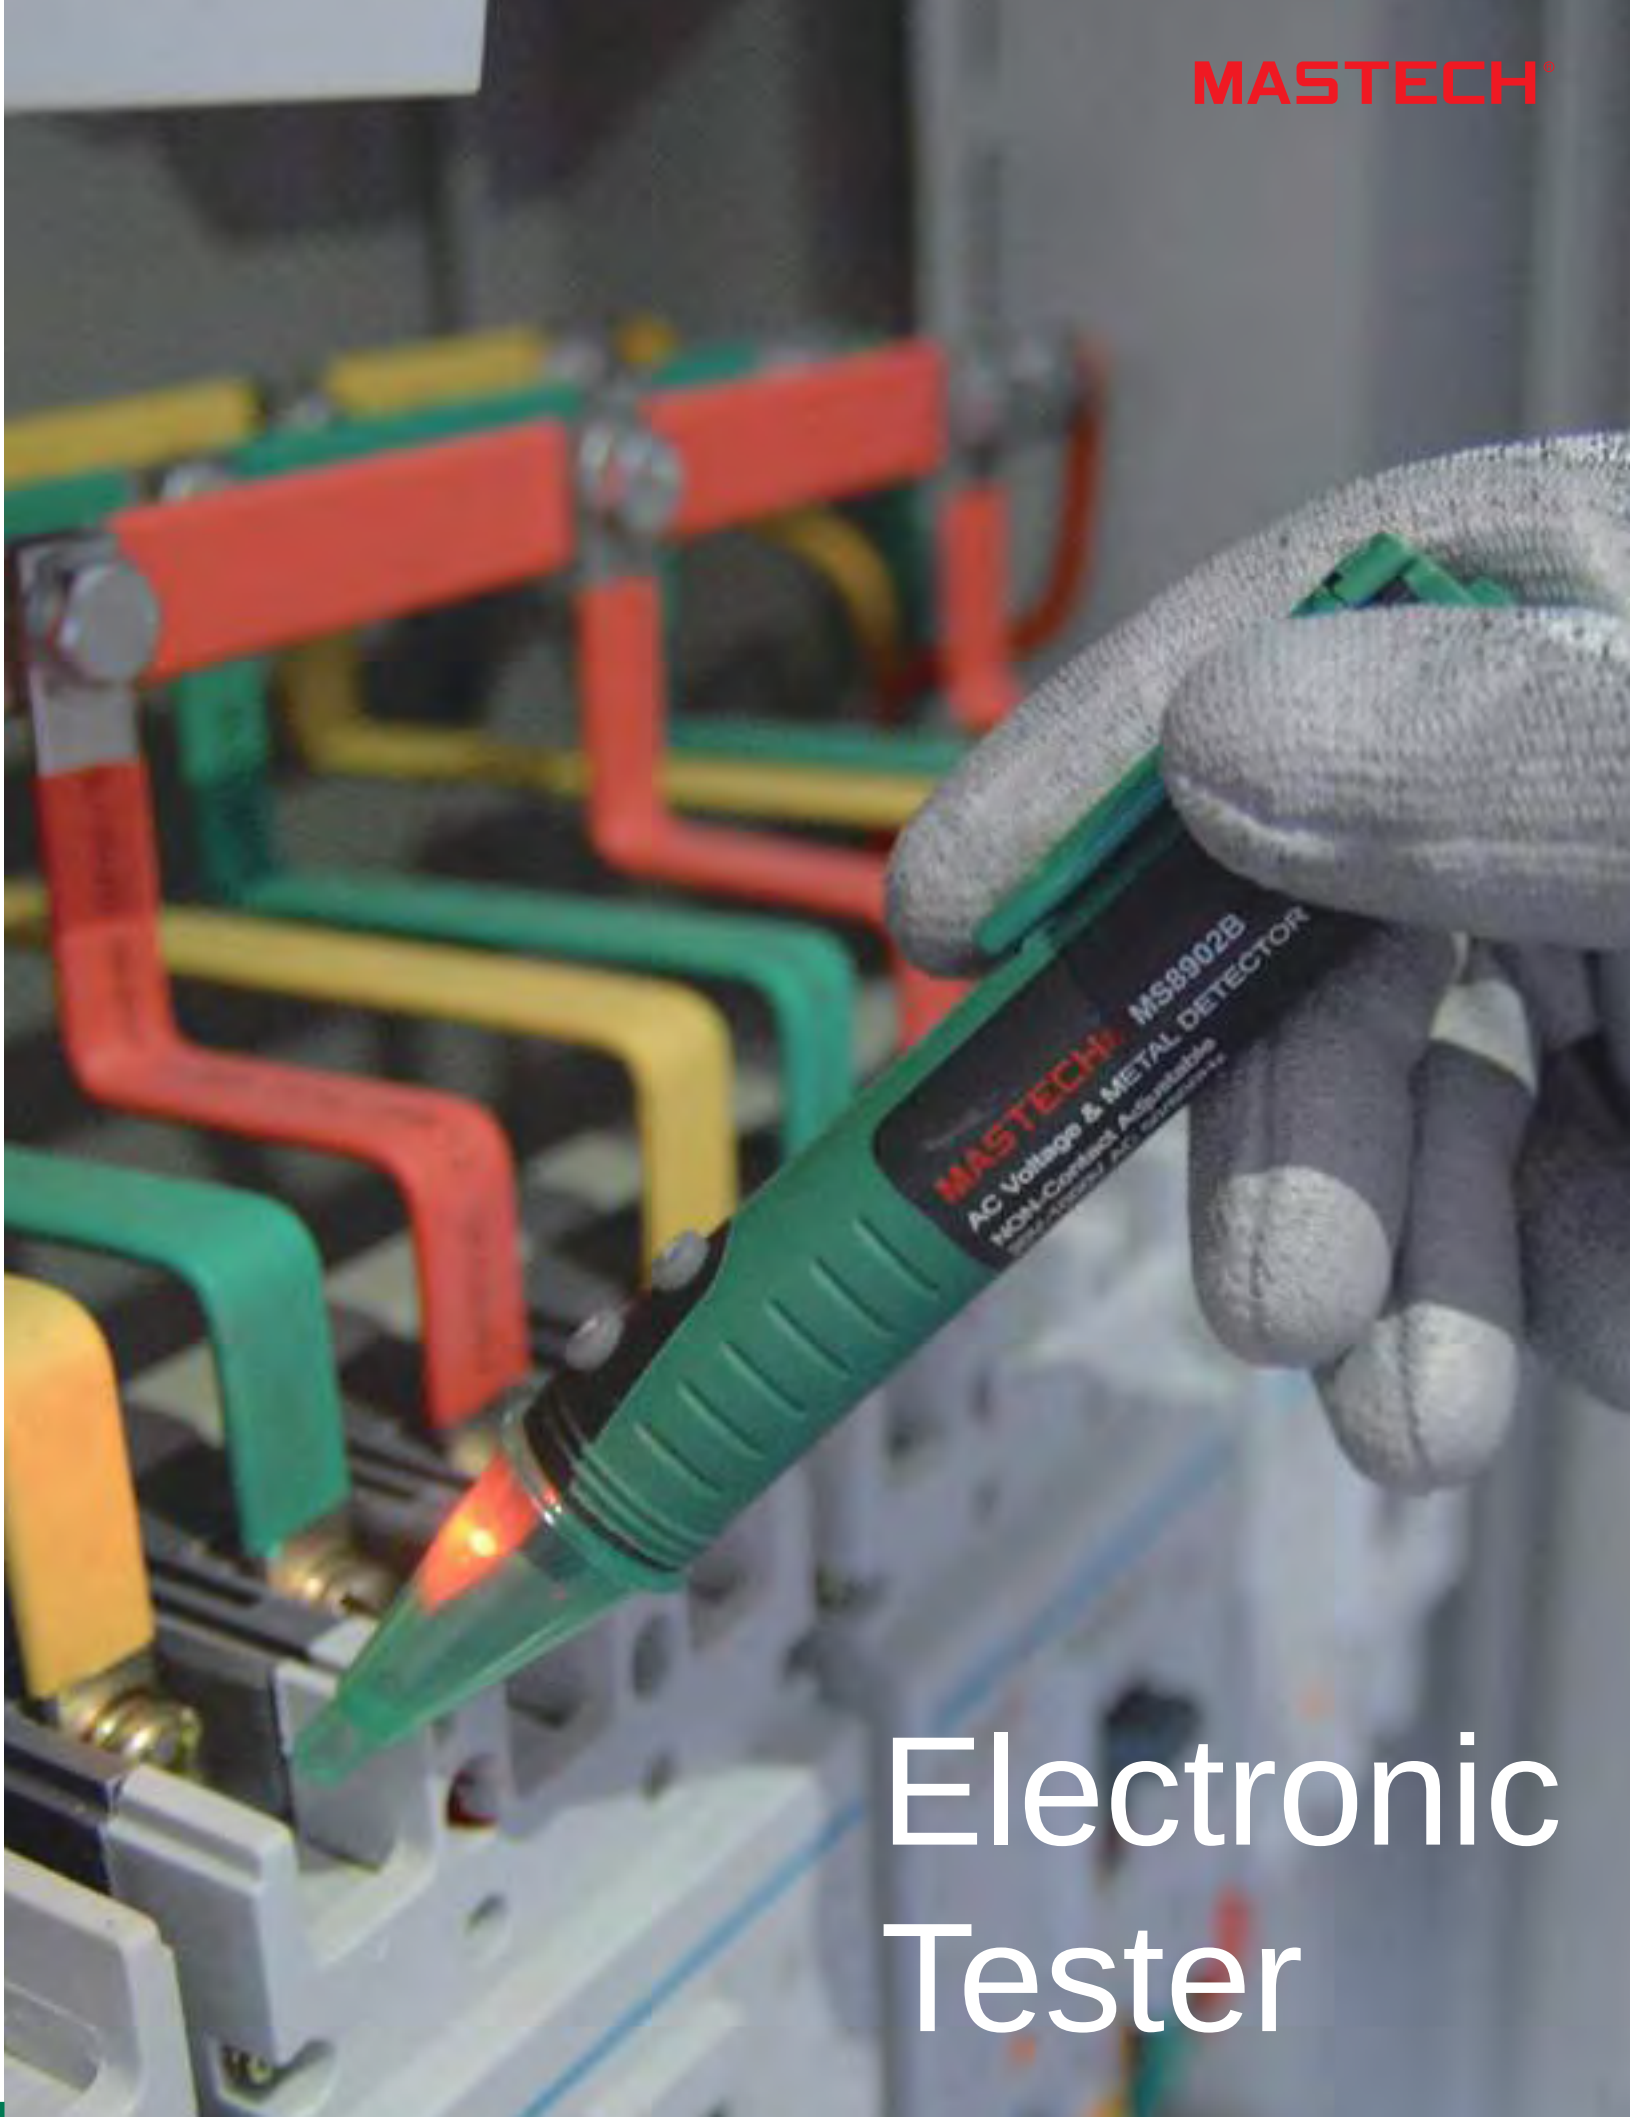

Electronic
Tester

MS6860 series
SOCKET TESTER



MS6860B
V AC 110V



MS6860C
V AC 220V



MS6860D
V AC 230V



MS6860E
V AC 230V

	MS6860B	MS6860C	MS6860D	MS6860E
Specifications				
Voltage Range	110V	220V	230V	230V
LED Indicate Condition of the Socket's Wring:	Correct			
	Missing Earth			
	Live-Earth Reverse			
	Live-Neutral Reverse			
	Missing Neutral			
General				
Product Size	68mm×60mm×56mm/2.67"×2.36"×2.2"			
Product Weight	60g/0.13lb			
Certification	RoHS	RoHS	CE/RoHS	CE/RoHS
Safety Rating	CAT II 230V	CAT II 230V	CAT II 230V	CAT II 230V



MS102 MS112
SOCKET TESTER with GFCI



	MS102	MS112
Specifications		
AC Voltage	125V	125V
Operating Temperature	0~40°C	0~40°C
Operating Humidity	<80% RH	<80% RH
GFCI	•	
Indicator	Fault	Reason for Wiring Fault
○ ● ○	Open Ground	Ground contact not connected
○ ○ ●	Open Neutral	Neutral contact not connected
○ ○ ○	Open Hot	Hot contact not connected
● ○ ●	Hot/Ground Reverse	Hot and ground contacts reversed
● ● ○	Hot/Neutral Reverse	Hot and neutral contacts reversed
○ ● ●	Correct	Receptacle is wired correctly
General		
Product Size	82mm×42mm×32mm/3.2"×1.65"×1.26"	
Product Weight	45g/0.1lb	
Certification	ETL/RoHS	
Safety Rating	CAT II 125V	



MASTECH®

3 WIRE/ GFCI
AC 125V



3 WIRE
AC 125V



MS112

MS5902RT series

CIRCUIT BREAKER FINDER



MS5902TB

V AC 110V



MS5902TC

V AC 220V



MS5902TD

V AC 230V



MS5902TE

V AC 230V



MS5902TF

V AC 120V



General		
Power Supply	1x9V 6F22 Battery	
Product Size	MS5902R	198x40x50mm 7.8"x1.57"x1.97"
	MS5902TB	
	MS5902TC	71x64x55mm
	MS5902TD	2.8"x2.5"x2.16"
	MS5902TE	
	MS5902TF	82x42x32mm 3.2"x1.65"x1.26"
Product Weight	MS5902R	126g/0.28lb
	MS5902TB	
	MS5902TC	60g/0.13lb
	MS5902TD	
	MS5902TE	
	MS5902TF	
Certification	MS5902R	CE/ETL/RoHS
Safety Rating	MS5902R	CAT II 600V

MS5902RT					
Transmitter Model	B	C	D	E	F
AC Voltage Range	110V	220V	230V	230V	120V
GFCI					•
Socket Tests	•	•	•	•	•
MS5902R+MS5902T	Quickly and Easily Identify if Individual Branch Circuits Work with MS5902T without Disrupting Power.				
MS5902T (Socket Tester Mode)	Correct				
LED	Missing earth				
Indicate Condition of the Socket's	Live-earth reverse				
Wiring:	Live-neutral reverse				
	Missing neutral				
MS5902R	Work Light at the Head of MS5902R Points to the Target Area.				
	Low Battery Indication				
	Buzzer and LED instructions				

MS5905RT series

CIRCUIT BREAKER FINDER with NCV



MS5905RTA

V AC 125V



MS5905RTB

V AC 125V



MS5905RTC

V AC 220V



MS5905RTD

V AC 230V



MS5905RTE

V AC 230V



General		
Power Supply	1x9V 6F22 Battery	
Product Size	MS5905R	177x46x31mm 6.97"x1.81"x1.22"
	MS5905TA	82x42x32mm
	MS5905TB	3.2"x1.65"x1.26"
	MS5905TC	71x64x55mm
	MS5905TD	2.8"x2.5"x2.16"
	MS5905TE	
Product Weight	MS5905R	130g/0.29lb
	MS5905TA	35g/0.1lb
	MS5905TB	
	MS5905TC	63g/0.14lb
	MS5905TD	
	MS5905TE	
Certification	MS5905R	CE/ETL/RoHS
Safety Rating	MS5905R	CAT II 600V

MS5905RT					
Transmitter Model	A	B	C	D	E
AC Voltage Range	125V	125V	220V	230V	230V
GFCI		•			
Socket Tests	•	•	•	•	•
MS5905R+MS5905T	Quickly and Easily Identify if Individual Branch Circuits Work with MS5905T without Disrupting Power.				
MS5905T (Socket Tester Mode)	Correct				
LED	Missing earth				
Indicate Condition of the Socket's	Live-earth reverse				
Wiring:	Live-neutral reverse				
	Missing neutral				
MS5905R Built-in	Voltage Range: AC90V~AC600V				
Non-Contact Voltage	Frequency: 50Hz~60Hz				
Detector (NCV)	Detecting Distance: <30mm				
MS5905R	Buzzer and LED instructions				

MS8900A

MS8900C / MS8900N

NON CONTACT AC VOLTAGE DETECTOR



V AC 1000V

	MS8900A	M8900C	MS8900N
Specifications			
Non-Contact AC Voltage Detector	●		
AC Voltage Range	90~1000V	100~240V	90~1000V
Frequency	50Hz~60Hz		
Sound and Light Instruction	●		
Red and Green LED Light	●		
Double Molded Case	●		
Operating Temperature	0℃~50℃		
General			
Storage Temperature	-20℃~60℃		
Humidity	<85%RH		
Altitude	<2000m		
Product Size	157mm×24mm×20mm/6.18"×0.94"×0.78"		
Product Weight	42g/0.09lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		
Power Supply	2×1.5V AAA	2×1.5V AAA	2×1.5V AAA

Accessories Included

Battery and User's manual



MS8902B

MS8902A / MS8902H

NON CONTACT AC VOLTAGE DETECTOR



V AC 1000V

	MS8902A	MS8902B	MS8902H
Specifications			
Non-Contact AC Voltage Detector	●		
AC Voltage Range	12~1000V	20~1000V	100~1000V
Frequency	50Hz~500Hz		
Sound and Light Instruction	●		
Red and Green LED Light	●		
Double Molded Case	●		
Metal Detecting Distance		<20mm	
AC Voltage Sensitivity adjustment	●	●	
Memory Sensitivity function	●	●	
Auto Power Off	●	●	
Low Battery Indication		●	
Operating Temperature	-10℃~50℃		
General			
Storage Temperature	-20℃~60℃		
Humidity	<85%RH		
Altitude	<2000m		
Product Size	157mm×24mm×20 mm/6.18"×0.94"×0.78"		
Product Weight	42g/0.09lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT II 1000V/CAT III 600V		
Power Supply	2×1.5V AAA	1×12V A23S	2×1.5V AAA

Accessories Included

Battery and User's manual



MS8907

NON CONTACT AC VOLTAGE DETECTOR



V AC 50V~1000V

MS8907		
Specifications		
NCV	Non-Contact AC Voltage Detector	•
AC Voltage	50~1000V	•
Frequency	50Hz/60Hz	•
Instruction	Sound and Light	•
LED	Red and Green LED Light	•
Altitude	<2000m	•
Operation TEMP	-10°C~50°C	•
Storage TEMP	-20°C~60°C	•
Humidity	<85%RH	•
Work Light		•
General		
Power Supply	2×1.5V AAA Batteries	
Product Size	157mm×24mm×20mm/6.2"×0.95"×0.79"	
Product Weight	42g/0.09 lb	
Certificate	CE/ETL/RoHS	
Safety Rating	CAT II 1000V/CAT III 600V	

Accessories Included
Battery and User's manual



MS6580B

MS6580D

MASTECH®

NON-CONTACT INFRARED THERMOMETERS with NCV/WORKLIGHT



V AC 1000V

IRT TEMP -20°C~330°C
-4°F~626°F

MS6580B/D		
Specifications	Range	Accuracy
Temperature	-20°C~0°C	±3°C
	-4°F~32°F	±5.5°F
	0°C~330°C	±(1.5%+2°C)
	32°F~626°F	±(1.5%+3°F)
Resolution		0.1°C/0.1°F
Repeatability		±0.1°C
Emissivity		0.95
Optical Resolution		4 : 1
AC Voltage Detector	12-1000V / 50-60Hz	•
Features		
NCV	Non-Contact Voltage Detector	•
NCV Sensitivity	4Levels	•
IRT	Infrared Temperature	•
Spectral Response	8-14 μm	•
MAX Altitude	2000m	•
Laser	<1mW/630-670nm	•
Laser Pointer		•
°C/°F Selection		•
Response Time	0.5 second	•
Relative Humidity	10%~90%	•
Reading Hold		•
Work Light		•
Display Backlight		•
LBD	Low Battery Display	•
General		
Power Supply	2×1.5V AAA Battery	
Product Size	152mm×31mm×31mm/6"×1.22"×1.22"	
Product Weight	220g/0.44lb	
The Default Temperature	(°C)Centigrade/(°F)Fahrenheit	
Certification	CE/ETL/RoHS	
Safety Rating	CAT II 1000V/CAT III 600V	



MS6580D

Accessories Included
Battery and User's manual

MS8922A

MS8922B

VOLTAGE TESTER



V	DC	400V
	AC	400V

MS8922A MS8922B			
Specifications			
AC/DC Voltage LED Steps	±12V, 24V, 50V, 120V, 230V, 400V	•	•
Accuracy	-30%~0% of indication	•	•
Frequency	50Hz/60Hz	•	•
RCD	RCD Test function		•
Features			
Altitude	<2000m	•	•
Operation Time	Maximum 30s	•	•
Recovery Time	10 minutes	•	•
Relative Humidity	<80%RH	•	•
Temperature Range	-10~55°C/14~131°F	•	•
General			
Power Supply	N/A		
Product Size	223mmx40mmx32 mm/8.78"x1.57"x1.26"		
Product Weight	98.5g/0.26lb		
Certificate	CE/ETL/RoHS		
Safety Rating	CAT III 400V		

Accessories Included
Battery and User's manual

MS8922B

MS6812A


CABLE TRACKER



RECEIVE FREQUENCY	100Hz~300kHz
SEND TONE FREQUENCY	1.5kHz

MS6812A	
Applications	
- Judge Continuity of the Cables or Wires	
- Track the Cables or Wires, and Diagnose the Break Point	
- Receive the Tone Signal on the Cables or Wires(Telephone Line)	
- Identify the State in the Working Telephone Line(Clear, Ringing, Busy)	
- Send a Single Solid or a Dual Alternating Tone to the Target Cables or Wires	
Features	
Top Generator Ouput	Single (1500Hz)
(Square Waveform):	Dual (1300~1500Hz)
Send Tone Frequency	1.5kHz
Receive Frequency	100Hz~300kHz
Instruction	Sound and Light
LED	Cont and Tone LED Light
General	
Power Supply	2x9V 6F22 Batteries
Receiver Size	238mm×43mm×26mm/9.4"×1.7"×1.0"
Emitter Size	145mm×35mm×25mm/5.7"×1.38"×0.98"
Receiver Weight	71g/0.16lb
Emitter Weight	87g/0.2lb
Certifiacte	CE/ETL/RoHS

Accessories Inculded
Battery and User's manual

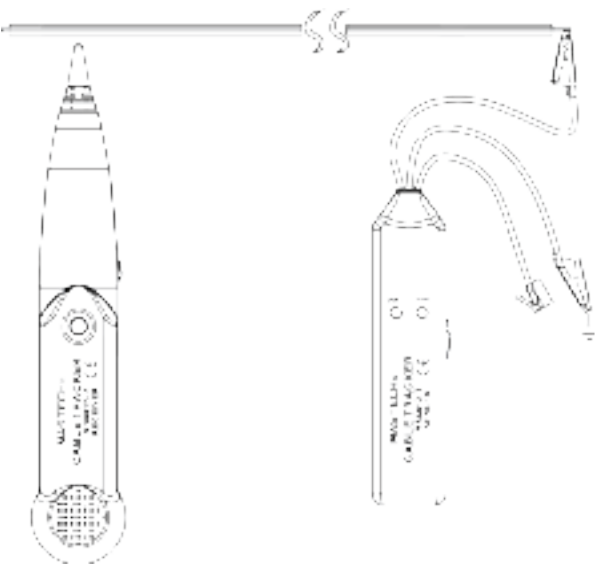

MS6810

MS6811


NETWORK CABLE TESTER




MS6811




Annex A

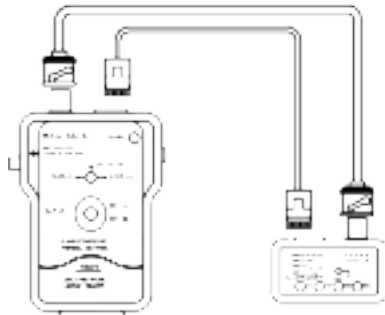

Annex B

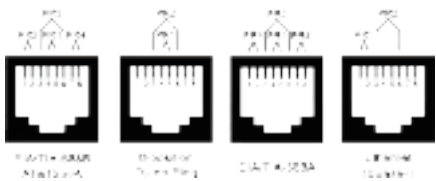

Fault details

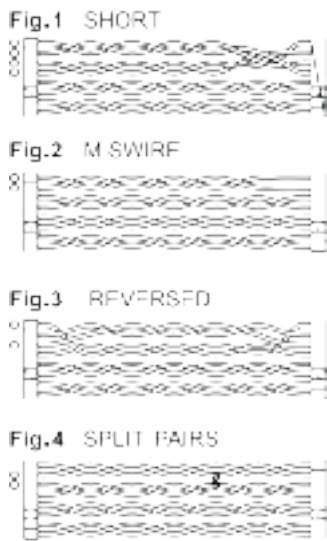

	MS6810	MS6811
Specifications		
Twisted-wire-pair cables (RJ45):	•	•
10Base-T, T568A, T568B, Token Ring		
Testing Cables Shield Integrity	•	•
Coaxial Cable (BNC)	•	
Low Battery Indicator		•
Measurement Distance of Cables	200m(max)	200m(max)
General		
Power Supply	1×9V 6F22 Battery	1×6V 4LR44/4AG13 Battery
Product Size	153mm×74mm×31mm/6.0"×2.9"×1.2"	125mm×55mm×30mm/4.9"×2.2"×1.2"
Product Weight	120g/0.26lb	106g/0.23lb
Certificate	CE/ETL/RoHS	CE/ETL/RoHS

Accessories Included
Battery and User's manual

MS6813

MULTI-FUNCTIONS CABLE TRACKER



RECEIVE
FREQUENCY 100Hz~300kHz

SEND TONE
FREQUENCY 1.5kHz

Accessories Included
Carry bag
Battery and User's manual



MS6813	
Applications	
- Testing Coaxial Cable (BNC)	
- Twisted-wire-pair cables (RJ45): 10Base-T, T568A, T568B, Token Ring	
- Testing Cable's Shield Integrity	
- Judge Continuity of the Cables or Wires	
- Track the cables or wires, and diagnose the break Point	
- Receive the tone signal on the cables or wires (telephone line)	
- Identify the state in the working telephone line (clear, ringing, busy)	
- Send a Single Solid or a Dual Alternating Tone to the Target Cables or Wires	
Features	
Send tone frequency: 1-5kHz	
Receive frequency: 100Hz~300kHz	
General	
Power Supply	2×9V 6F22
Product Size	206mm×84mm×55mm/8.1"×3.3"×2.1"
Product Weight	330g/0.72lb
Certificate	CE/ETL/RoHS



MS6818

ADVANCED CABLE LOCATOR



V DC 400V
AC 400V

OUTPUT SIGNAL 125kHz

Accessories Included

- Test leads
- Test probe
- Alligator clip
- Grounding rod
- Package bag
- Battery and User's manual

★ Won the U.S. EC&M Testing and Positioning equipment 2013 Annual Award

Applications and Feature :

- Find the Beaks or Shorts in Cable in the wall or Earth
- Track Cables in the wall or Earth
- Find the Fuse and Safeguard
- Find the Beaks or Shorts in Conduit under the Floor
- Track a Metal Conduit in the Project of ware or hot
- Sensitivity of Receiver can be selected
- Auto Ranging, Auto Power Off, Backlight and Worklight

Technical Parameters of Transmitter

Output Signal	125kHz
External Voltage	DC12~400V AC12~400V(50~60Hz) ±2.5%
Fuse	F0.5A 1000V
MIN Current	about 31mA
MAX Current	about 115mA
In Work	0~40°C, with MAX relative humidity of 80%
In Storage	-20~60°C, with MAX relative humidity of 80%
Altitude	<2000m
Product Size	190mm×89mm×42.5mm/7.48"×3.5"×1.67"
Product Weight	420g/0.92lb
Power Supply	1×9V 6F22 Battery

Technical Parameters of Receiver


Depth of Tracking	The Depth of Tracking Depends on the Material and Specific Applications
Cable	Single pole application: about 0~2m
Locating	Dual pole application: about 0~0.5m
Mode	Single loop line: Up to 2.5m
MIN Current	about 32mA
MAX Current	about 89mA
In Work	0~40°C, with MAX relative humidity of 80%
In Storage	-20~60°C, with MAX relative humidity of 80%
Altitude	<2000m
Product Size	241.5mm×78mm×38.5mm/9.5"×3"×1.5"
Product Weight	350g/0.77lb
Power Supply	6×1.5V AAA Battery
General	
Certificate	CE/ETL/RoHS
Safety Rating	CAT III 300V

MS6818


ADVANCED CABLE LOCATOR

MASTECH®

● One-pole application

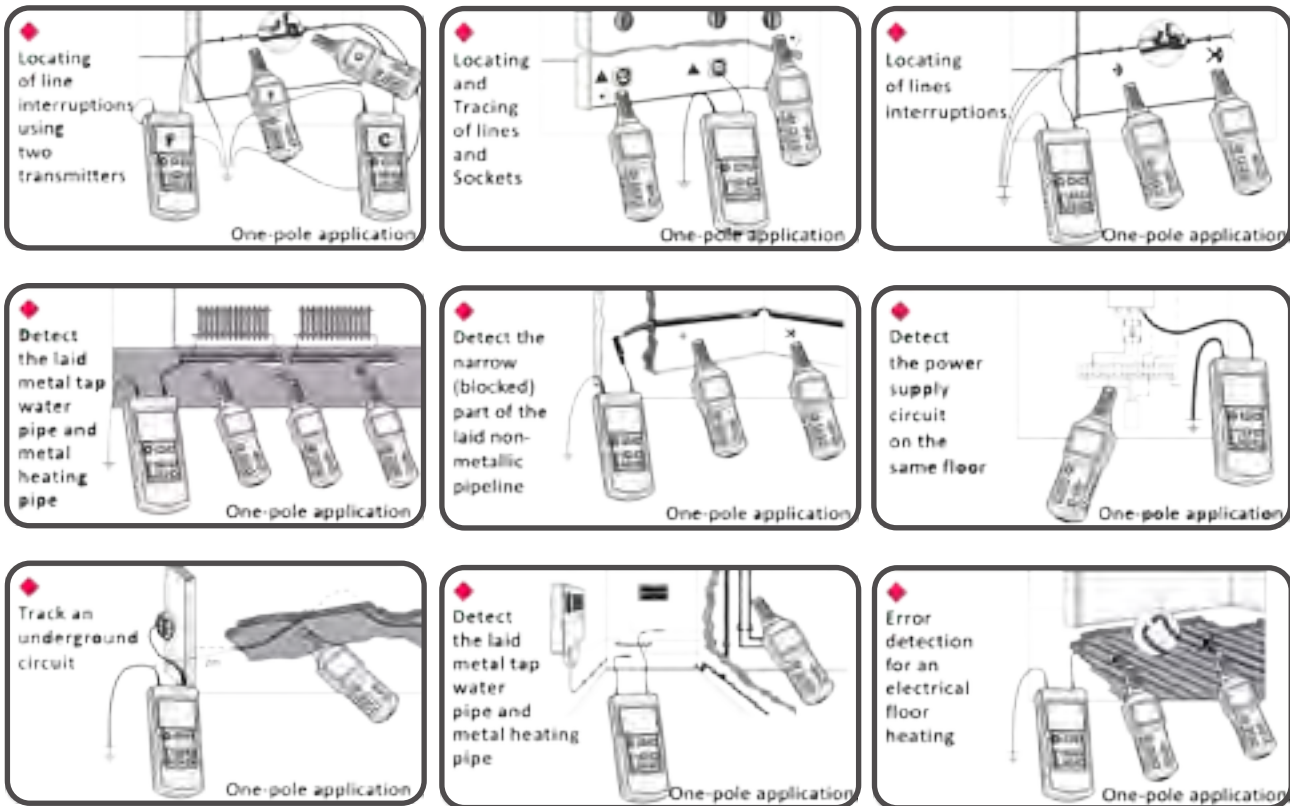

● Dual-pole application

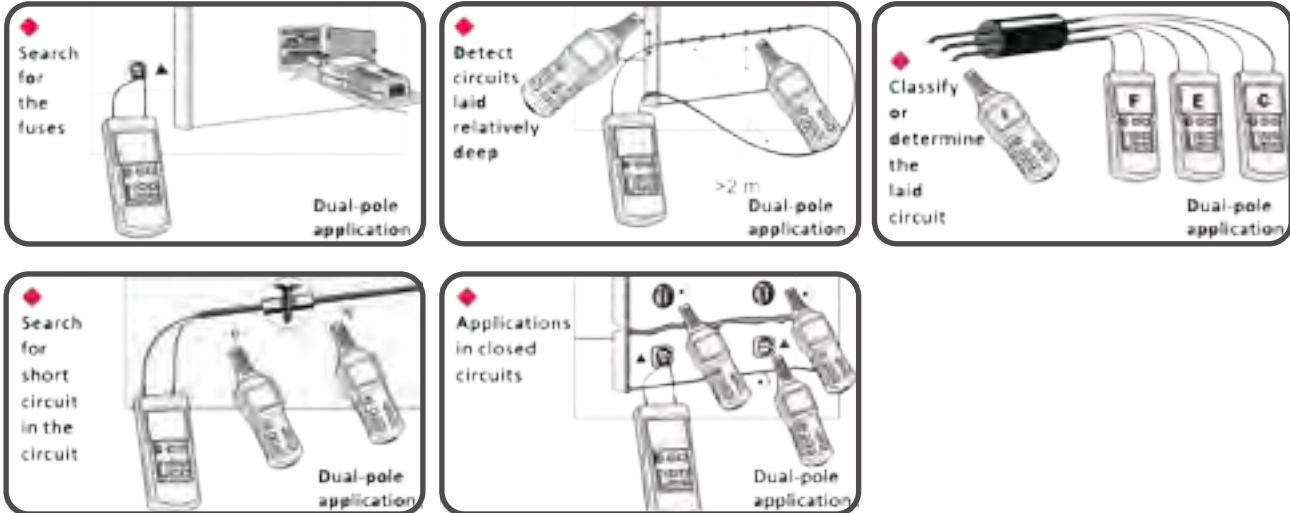

MS5900

MS5901

MOTOR & PHASE ROTATION INDICATOR



V AC 120V~400V

FREQUENCY 2Hz~400Hz

		MS5900	MS5901
Specifications	Range		
Nominal Voltage Rotary Direction	1~400V AC		•
Nominal Voltage Phase Indication	120~400V AC		•
Frequency	2~400Hz		•
Test Currents (In per phase)	Less than 3.5 mA		•
Features			
Equipped with 3 test leads			•
Operating TEMP	0~40°C		•
Operating Altitude	2000m		•
Pollution Degree	2		•
Relative Humidity	15~80%RH		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	130mm×72mm×32mm/5.1"×2.8"×1.3"		
Product Weight	MS5900 193g/0.43lb / MS5901 252g/0.6lb		
Certificate	MS5901 CE/ETL/RoHS		
Safety Rating	CATIII 600V		

Accessories Included

- Test probes
- Test alligator clips
- Carry bag
- Battery and User's manual



MS5901



MS5908C

MS5908A

CIRCUIT ANALYZER



A DROP LOAD 5A/8A/10A

V LINE 85V~265V

V PEAK LINE 120V~375V

	MS5908A	MS5908C		
Specifications			Resolution	Accuracy
Line Voltage	85.0~135.0V	85.0~265.0V	0.1V	±(1.0%+2)
Peak Line Voltage	120.0~190.0V	120.0~375.0V	0.1V	±(1.0%+2)
Voltage With Loading Equipments	10.0~135.0V	10.0~265.0V	0.1V	±(2.5%+2)
Line Frequency	45.0~65.0Hz		0.1Hz	±(1.0%+2)
Impedance-live and Neutral & Earth	0.00~3.00Ω		0.01Ω	±(2.5%+2)
	>3.00Ω		0.01Ω	No ensure
Neutral-Ground Voltage	0.0~10.0V		0.1V	±(2.5%+2)
RCD Trip Time	1ms~6.5S		1mS	±(1.0%+2)
RCD Trip Current	30mA~37mA		0.1mA	±(1.0%+2)
GFCI Trip Time	1ms~6.5S		1mS	±(1.0%+2)
GFCI Trip Current	6mA~9mA		0.1mA	±(1.0%+2)
Voltage Drop	0.1~99.9%		0.1%	±(2.5%+2)
Voltage Drop Load Current	12/15/20A	5/8/10A		
General				
Power Supply	6×1.5V AAA Batteries			
Product Size	194mm×78mm×37mm/7.64"×3.07"×1.46"			
Product Weight	254g/0.56lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 300V			

Accessories Included

- Power Cord
- Carry bag
- Battery and User's manual

MASTECH®



MS5910

RCD / LOOP TESTER



- Accessories Included**
- Test lead
 - Alligator clip
 - USB data cable
 - Software CD
 - Package bag
 - Battery and User's manual



V AC 440V

A AC 10mA~500mA

MS5910					
Item	Range		Resolution		Accuracy
Trip-out time	x1 IΔN 300mS (slow 500mS)	0.1mS	±3mS		
	x5 IΔN 40mS (slow 150mS)				
Trip-out Current	(0.2~1.1) IΔN	0.05 IΔN	±0.1 IΔN		
Contact Voltage	0~99.9V	0.01,0.1V	±(10%+2)		
Alternating Voltage (UL-N, UL-L, UL-E)	0~440V	1V	±(3%+3)		
Frequency	45~65Hz	1Hz	±1Hz		
Loop Resistance (RL)	0.1~2000Ω	0.1Ω	±(10%+0.2V)		
RL test current	0.5 IΔN	0.05 IΔN	±(10%+10)		
Multiplying Power of Test Current	x0.5,x1,x5				
Current Level (IΔN)	10/30/100/300/500mA				
Trigger Phase Angle	0° or 180°				
RCD Test Current Selection Table	IΔN (mA)	IΔx1/2(mA)	IΔx1(mA)	IΔx5(mA)	Auto(mA)
	10	5	10	50	10
	30	15	30	150	30
	100	50	100	500	100
	300	150	300	1500	300
	500	250	500	—	500
Features					
Data Logging	100 groups				
Fast/Slow	Fast/Slow Testing of 10mA,30mA,100mA,300mA,500mA				
Display Backlight	●				
USB Interface	Windows OS				
APO	Auto Power Off				
LBD	Low Battery Display				
General					
Power Supply	6×1.5V AA Batteries				
Product Size	200mm×155mm×76mm/7.6"×5.9"×2.95"				
Product Weight	500g/1.1lb				
Certificate	CE/ETL/RoHS				
Safety Rating	CAT III 300V				

MASTECH®

LCR
and
Process
Calibrators

MS8910

MS8910A

SMART SMD TESTER



R

300Ω~30MΩ

C

3nF~30mF

MS8910 MS8910A			
Specifications	Range	Resolution	Accuracy
Resistance	300Ω/3kΩ/30kΩ/300kΩ/3MΩ	0.1Ω/1Ω/10Ω/100Ω/1kΩ	±(1.0%+2)
	30MΩ	10kΩ	±(1.2%+3)
Capacitance	3nF/30nF/300nF/3μF/30μF	1pF/10pF/100pF/1nF/10nF	±(2.0%+3)
	300μF/3mF/30mF	0.1μF/1μF/10μF	±(3.0%+3)
Features			
Display	counts	3000	
Auto Ranging	Auto	●	
APO	Auto Power Off	●	
Data Hold		●	
LBD	Low Battery Display	●	
Auto Scanning		●	
Diode Check	Open Voltage	2.8V	4V
	Testing Current	2mA	1.3mA
Continuity Buzzer		30Ω	30Ω
General			
Power Supply	1×3V CR2032 Battery		
Product Size	175mm×32mm×20mm/6.89"×1.26"×0.79"		
Product Weight	48g/0.10lb		
Certificate	CE/ETL/RoHS		

Accessories Included

Spare test pin

Wrapping case

Battery and User's manual



MS8911

SMART SMD TESTER (R/C/L)



R

60Ω~20MΩ

L

600μH~200H

C

600pF~6mF

Specifications	Testing Voltage	Range	Resolution	Accuracy
Resistance	0.5V RMS	60Ω	0.01Ω	±(2.0%+10)
		600Ω/6kΩ/ 60kΩ/600kΩ	0.1Ω/0.001kΩ/ 0.01kΩ/0.1kΩ	±(1.0%+5)
		6MΩ/20MΩ	0.001MΩ/0.01MΩ	±(2.0%+5)
	0.1V RMS	60Ω	0.01Ω	±(2.0%+10)
		600Ω/6kΩ/ 60kΩ/600kΩ	0.1Ω/0.001kΩ/ 0.01kΩ/0.1kΩ	±(1.5%+5)
		6MΩ/20MΩ	0.001MΩ/0.01MΩ	±(3.0%+5)
Capacitance	0.5V RMS	600pF	0.1pF	±(2.0%+8)
		6nF/60nF/600nF	0.001nF/0.01nF/0.1nF	±(1.0%+5)
		6μF/60μF	0.001μF/0.01μF	±(2.0%+5)
	0.1V RMS	600μF	0.1μF	±(2.0%+10)
		6mF	0.001mF	±(2.0%+5)
		600pF	0.1pF	±(2.0%+5)
Inductance	0.5V RMS	600pH/6000μH	0.1μH/1μH	±(2.0%+5)
		60mH/600mH/ 6H/60H	0.01mH/0.1mH/ 0.001H/0.01H	±(1.0%+5)
		200H	0.1H	±(2.0%+5)
	0.1V RMS	600μH/6000μH	0.1μH/1μH	±(3.0%+5)
		60mH/600mH/6H	0.01mH/0.1mH/0.001H	±(1.5%+5)
		60H	0.01H	±(1.0%+5)
200H	0.1H	±(2.0%+5)		
Features				
Display	counts			6000
Auto Ranging	Auto & Manual			●
APO	Auto Power Off			●
Data Hold				●
LBD	Low Battery Display			●
Auto Scanning				●
General				
Power Supply	1×3V CR2450 Battery			
Product Size	186mm×35mm×23.6mm/7.3"×1.38"×0.93"			
Product Weight	90g/0.2lb			
Certification	CE /ETL/RoHS			

Accessories Included

Battery and User's manual



MY6243

MS6013

DIGITAL LCR METER



MS6013



L2mH~2H

C2nF~200μF

- Accessories Included
- Test Leads
- Holster
- Battery and User's manual

		MS6013	MY6243
Specifications	Range	Resolution	Accuracy
Capacitance	200pF	0.1pF	±(0.5%+1)
	2nF/20nF/200nF	1pF/10pF/100pF	±(0.5%+1) ±(1.0%+1)
	2μF/20μF/200μF	1nF/0.01μF/0.1μF	±(0.5%+1) ±(2.0%+1)
	2000μF	1μF	±(1.0%+1)
	20mF	10μF	±(2.0%+2)
Inductance	2mH/20mH/200mH	1μH/10μH/100μH	±(2.0%+1)
	2H	1mH	±(5.0%+1)
Features			
LCD Display	counts	2000	2000
Zero Adjustment	approx. ± 20pF	•	
Input Jacks		•	•
Accuracy	High Accuracy in Measuring	•	•
LBD	Low Battery Display	•	•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	189mm×91mm×31.5mm/7.4"×3.6"×1.2"		
Product Weight	240g/0.52lb		
Certification	CE/ETL/RoHS		

MS5308

AUTORANGING DIGITAL LCR TESTER with USB interface



R200MΩ

C20mF

L20kH

Features		
Elevation	<2000m	•
Relative Humidity	<80%RH	•
Operating TEMP	0°C~40°C	•
Dua Display	20000(Main) and 2000(Secondary) counts	•
Auto Ranging	Auto & Manual	•
APO	Auto Power off	•
LCR	Auto LCR smart check and measurment	•
DCR	support DCR mode	•
Measurement mode	Series / Parallel measurement mode	•
B.LIGHT	Display Backlight	•
LDB	Low Battery Display	•
Data hold		•
RS232 interface		•
General		
Power Supply	8×1.5 AA Batteries	
Product Size	224mm×172mm×58mm/8.8"×6.8"×2.3"	
Product Weight	841g/1.85lb	
Certificate	CE / ETL / RoHs	

Resistance Measurement				Capacitance Measurment				Inductance Measurment			
Frequency	Range	Resolution	Accuracy	Frequency	Range	Resolution	Accuracy	Frequency	Range	Resolution	Accuracy
100Hz/120Hz	200.00Ω	0.01Ω	1.0%+5d	100Hz/120Hz	20.000nF	1pF	1.0%+5d	100Hz/120Hz	20.000mH	1μH	1.0%+5d
100Hz/120Hz	2.0000kΩ	0.1Ω	0.3%+5d	100Hz/120Hz	200.00nF	0.01nF	0.5%+5d	100Hz/120Hz	200.00mH	0.01mH	0.5%+5d
100Hz/120Hz	20.000kΩ	1Ω	0.3%+5d	100Hz/120Hz	2000.0nF	0.1nF	0.5%+5d	100Hz/120Hz	2000.0mH	0.1mH	0.5%+5d
100Hz/120Hz	200.00kΩ	0.01kΩ	0.5%+5d	100Hz/120Hz	20.000μF	1nF	0.5%+5d	100Hz/120Hz	20.000H	1mH	0.5%+5d
100Hz/120Hz	2.0000MΩ	0.1kΩ	1.0%+5d	100Hz/120Hz	200.00μF	0.01μF	1.0%+5d	100Hz/120Hz	200.00H	0.01H	1.0%+5d
100Hz/120Hz	20.000MΩ	1kΩ	1.0%+5d	100Hz/120Hz	2000.0μF	0.1μF	2.0%+5d	100Hz/120Hz	2000.0H	0.1H	1.0%+5d
100Hz/120Hz	200.00MΩ	0.1MΩ	2.0%+5d	100Hz/120Hz	20.00mF	0.1mF	2.0%+5d	100Hz/120Hz	20.000KH	1H	2.0%+5d
1kHz	20.000Ω	0.001Ω	1.0%+5d	1kHz	2000.0pF	0.1pF	1.0%+5d	1kHz	2000.0μH	0.1μH	1.0%+5d
1kHz	200.00Ω	0.01Ω	0.3%+5d	1kHz	20.000nF	1pF	1.0%+5d	1kHz	20.000mH	1μH	0.5%+5d
1kHz	2.0000kΩ	0.1Ω	0.3%+5d	1kHz	200.00nF	0.01nF	0.5%+5d	1kHz	200.00mH	0.01mH	0.5%+5d
1kHz	20.000kΩ	1Ω	0.3%+5d	1kHz	2000.0nF	0.1nF	0.5%+5d	1kHz	2000.0mH	0.1mH	1.0%+5d
1kHz	200.00kΩ	0.01kΩ	0.5%+5d	1kHz	20.000μF	1nF	0.5%+5d	1kHz	20.000H	1mH	1.0%+5d
1kHz	2.0000MΩ	0.1kΩ	1.0%+5d	1kHz	200.00μF	0.01μF	1.0%+5d	1kHz	200.00H	0.01H	2.0%+5d
1kHz	20.000MΩ	1kΩ	2.0%+5d	1kHz	2000.0μF	0.1μF	1.0%+5d	1kHz	2000.0H	0.1H	5.0%+5d
1kHz	200.0MΩ	0.1MΩ	5.0%+5d	10kHz	200.00pF	0.01pF	1.0%+5d	10kHz	200.00μH	0.01μH	1.0%+5d
10kHz	20.000Ω	0.001Ω	1.0%+5d	10kHz	2000.0pF	0.1pF	1.0%+5d	10kHz	2000.0μH	0.1μH	0.5%+5d
10kHz	200.00Ω	0.01Ω	0.5%+5d	10kHz	20.000nF	1pF	1.0%+5d	10kHz	20.000mH	1μH	0.5%+5d
10kHz	2.0000kΩ	0.1Ω	0.3%+5d	10kHz	200.00nF	0.01nF	1.5%+5d	10kHz	200.00mH	0.01mH	1.5%+5d
10kHz	20.000kΩ	1Ω	0.5%+5d	10kHz	2000.0nF	0.1nF	2.0%+5d	10kHz	2000.0mH	0.1mH	2.0%+5d
10kHz	200.00kΩ	0.01kΩ	1.0%+5d	100kHz	200.00pF	0.01pF	2.0%+5d	10kHz	20.000H	0.001H	5.0%+5d
100kHz	20.000Ω	0.001Ω	1.0%+5d	100kHz	2000.0pF	0.1pF	1.0%+5d	100kHz	20.000μH	0.001μH	1.0%+5d
100kHz	200.00Ω	0.01Ω	1.0%+5d	100kHz	20.000nF	1pF	2.0%+5d	100kHz	200.00μH	0.01μH	2.0%+5d
100kHz	2.0000kΩ	0.1Ω	1.0%+5d	100kHz	200.00nF	0.01nF	5.0%+5d	100kHz	2000.0μH	0.1μH	2.0%+5d
100kHz	20.000kΩ	1Ω	2.0%+5d					100kHz	20.000mH	1μH	2.0%+5d
								100kHz	200.00mH	0.01mH	5.0%+5d

- Accessories Included
- Kelvin test clip
- Software CD
- SMD test probe
- External power supply (option)
- IR data line
- User's manual



MS7220

THERMOCOUPLE CALIBRATOR



TYPE J, K, T, E, R, S, B, N

MS7220			
Thermocouple Type			
Type	Range	Resolution	
J	-200°C~1200°C/-328°F~2192°F	0.1°C/°F	
K	-200°C~1370°C/-328°F~2498°F	0.1°C/°F	
T	-200°C~400°C/-328°F~752°F	0.1°C/°F	
E	-200°C~950°C/-328°F~1742°F	0.1°C/°F	
R	-20°C~1750°C/-4°F~3182°F	1°C/°F	
S	-20°C~1750°C/-4°F~3182°F	1°C/°F	
B	600°C~1800°C/1112°F~3272°F	1°C/°F	
N	-250°C~1300°C/-418°F~2372°F	0.1°C/°F	
Millivolt Measure and Source (MAX input voltage:30V)			
Mode	Range	Resolution	Accuracy
mV	-10mV~75mV	0.01mV	±(0.02%+2)
Temperature Measure and Simulate (MAX input voltage:30V)			
Type	Resolution	Error	Reference junction Error
J,K,T,E,N	0.1°C/ °F	±(0.3°C+10uV)	±0.2°C
R,S,B	1°C/ °F	±(0.3°C+10uV)	±0.2°C
Features			
Thermocouple Standard		NIST 175	
Thermocouple Scales		ITS-90	
Storage Temperature		-40°C~60°C	
Operating Temperature		-10°C~55°C	
Operating Altitude		3000 meters maximum	
Temperature coefficient		±0.005% of range per °C for the temperature range -10~18°C and 28~55°C	
Humidity		95% (10 °C to 30 °C) 75% (30 °C to 40 °C) 45% (40 °C to 50 °C)	
Vibration		Random 2G, 5Hz~500Hz	
Shock		1 Meter drop test	
°C/°F Selection		Optional Temperature Unit Selection	
LBD		Low Batter Display	
General			
Power Supply	1×9V 6LR61 Battery		
Product Size	195mm×90mm×43mm/7.67"×3.54"×1.7"		
Product Weight	367g/0.8lb		
Certificate	CE/ETL/RoHS		

- Accessories Included
- Mini-plug TC wire

Wrapping case

Battery and User's manual

MS7221

VOLTAGE and CURRENT CALIBRATOR



V 0~100mV,
0~10V

A 0~24mA

MS7221			
Measurement and Output Voltage Parameter			
Function	Range	Resolution	Accuracy
DC Voltage	0~100mV	0.01mV	±(0.02%+2)
Input / Output	0.1~10V	0.001V	±(0.02%+2)
DC current Input / Output	0~24mA	0.001mA	±(0.015%+4)
Loop Power	24V	N/A	±10%
Features			
Storage Temperature		-40℃~60℃	
Operating Temperature		-10℃~55℃	
Operating Altitude		3000 meters maximum	
Temperature coefficient		±0.005% of range per °C for the temperature range -10~18℃ and 28~55℃	
Humidity		95% (10 °C to 30 °C) 75% (30 °C to 40 °C)	
Vibration		Random 2G , 5Hz~500Hz	
Shock		1 Meter drop test	
LBD		Low Battery Display	
APO		Auto power off	
General			
Power Supply	1×9V 6LR61 Battery		
Product Size	190mm×89mm×42mm/7.5"×3.5"×1.7"		
Product Weight	350g/0.77lb		
Certificate	CE/ETL/RoHS		

- Accessories Included
- Wrapping case

Battery and User's manual



MS7212

MULTI-FUNCTIONS PROCESS CALIBRATOR



V

DC 300V
AC 300V

A

DC 400mA
AC 400mA

MS7212			
Specifications	Range	Resolution	Accuracy
DC Voltage	400mV	0.01mV	±(0.025%+10)
	4V/40V/300V	0.1mV/1mV/10mV	±(0.025%+5)
AC Voltage	400mV	0.01mV	±(0.7%+20)
	4V/40V/300V	0.1mV/1mV/10mV	±(0.8%+10)
DC Current	400mA	0.01mA	±(0.1%+10)
AC Current	400mA	0.01mA	±(0.7%+10)
Resistance	400Ω/4KΩ/40KΩ/400KΩ	0.01Ω/0.1Ω/1Ω/10Ω	±(0.1%+10)
	4Hz~999.9Hz	0.01Hz	±0.05Hz
Frequency	1000Hz~5kHz	0.01Hz /0.1Hz	±0.5Hz
	5kHz~30kHz	0.1Hz/1Hz	±2.0Hz
Temperature	-50°C~1300°C	0.1°C	±(0.3%+1°C)
Source Output			
DC Voltage Output	100mV	0.001mV	±(0.025%+0.03%)
	5.000V/15.000V	0.001V	±(0.025%+0.02%)
DC Current Output	25mA	0.001mA	±(0.02%+0.02%)
Frequency Output	20Hz~5kHz	0.01Hz /0.1Hz	±0.02%
Features			
Display counts			40000
Auto Ranging			•
Manual Ranging			•
REL	Relative Measurement		•
Continuity Buzzer	<50Ω		•
MAX/MIN/AVG			•
Display Backlight			•
Data Hold			•
RS232 Interface			•
USB Interface	Windows OS		•
LBD	Low Battery Display		•
General			
Power Supply	8×1.5V AA Batteries		
Product Size	224mm×172mm×59mm/8.8"×6.77"×2.28"		
Product Weight	1100g/2.2lb		
Certificate	RoHS		
Safety Rating	CAT II 600V		



* External power supply (optional)

MASTECH®

Environment
Thermometers



MS6561

IMAGE IR THERMOMETER



IRT TEMP -20°C~400°C
 -4°F~752°F

- Accessories Included
- Wrapping case
 - Battery and User's manual

MS6561	
IR Temperature	
Temperature range	-20°C~400°C , -4°F~752°F
Accuracy	±2% or 2°C
Resolution	0.1 °C/°F
Emissivity	0.1~0.99
Distance to Spot Ratio (D:S)	30:1
React time	150ms
Spectral Response	8-14µm
Laser pointer	Dual Diverging Lasers, Frames Temp Measurement Area
Thermal Imaging	
Space Resolution	11mrad
Shutter	auto
Image resolution (W×H)	4800 Pixels (80×60)
Spectral Response	8-14µm
Field of view (H×W)	50°×38.6°
Sensitivity	150mk
Frame rate	9Hz
Palette	Red, Rainbow, Black Heat, White Heat
Storage format	BMP Image
Digital Camera	
Pixels	2 million pixels
Display mode	Thermal image / Mix / Digital camera
Storage	10,000 pictures
Photo compare	Thermal image comparing to Digital image
Features	
Display Type	2.4" TFT LCD
Display resolution (W×H)	76800 Pixels (240×320)
APO	YES
Power interface	Micro-USB
Battery life	Ordinary Use: 5 days Continuous Use: 8 hours
Data transmission	Micro-USB 2.0
Memory Card	8GB microSD
Operating temperature	-1~45°C, 14~113°F
Anti drop test	2 meter
Tripod base	YES
IP Level	IP54
General	
Power Supply	Lithium battery 3.7V, 2600mAh
Product Size (H*W*D)	190.0mm×63.0mm×103mm/7.48"×2.48"×4.0"
Product Weight	335g/0.74lb
Certification	CE/CB/FCC/FDA

MS6561

IMAGE IR THERMOMETER



Black & White



Rainbow



Red



It is the best choice for you to have a non-invasive and non-destructive way to aid early detection of potentially big problems.

- Pipework
Infrared thermography is a great tool for detecting faults in pipes and insulation. Heat exchangers are regularly checked with infrared to detect blocked pipes. A thermal imaging can quickly give an overview of the entire installation and it can expedite inspection of the equipment.
- Locate electrical problems
Infrared thermography makes technician or electrician easy to detect the issues with electrical connections, wiring or other system components, as they are clearly highlighted as "hot spots" with thermal imaging. You can clearly see the overheated connections on the thermal image.

MS6518

NON-CONTACT INFRARED THERMOMETERS [BODY: FOREHEAD]



TEMPERATURE 32°C~42°C
89°F~108°F

MS6518		
Specifications	Range	Accuracy
Temperature(Body)	32°C~42°C/89°F~108°F	±0.4°C/±0.7°F
Resolution		0.1°C/0.1°F
Repeatability		±0.1°C
Features		
Spectral Response	8-14 μm	•
MAX Distance	15cm	•
°C/°F Selection		•
Response Time	1 second	•
Relative Humidity	10%~90%	•
Data Logging	10 groups	•
Reading Hold		•
MEM		•
Display Backlight		•
LBD	Low Battery Display	•
General		
Power Supply	1×9V/6F22 Battery	
Product Size	142mm×92mm×47mm/5.6"×3.6"×1.85"	
Product Weight	135g/0.3lb	
Certificate	CE/ETL/RoHS	

Accessories Included
Battery and User's manual



MS6522B

MS6522A / MS6522C

NON-CONTACT INFRARED THERMOMETER



IRT TEMP -20°C~500°C
-4°F~932°F

		MS6522A	MS6522B	MS6522C
Specifications	Range	Accuracy		
Temperature	-20~0°C/-4~32°F	±3°C/ ±5°F	±3°C/ ±5°F	
	0~300°C	±(2%+2°C)		
	32~572°F	±(2%+3°F)		
	0~500°C		±(2%+2°C)	
	32~932°F		±(2%+3°F)	
	0~100°C			±(2%+2°C)
	32~212°F			±(2%+3°F)
(Body)	32~42°C/89~108°F			±0.5°C/ ±1.5°F
Resolution		0.1°C/0.1°F		
Repeatability		±0.1°C		
Emissivity		0.95		
Optical Resolution		10:1		
Features				
Spectral Response	8-14 μm	●		
Laser	<1mW / 630-670nm	●		
°C/°F Selection		●		
Response Time	1 second	●		
Relative Humidity	10%~90%	●		
Laser Target Pointer		●		
Reading Hold		●		
MAX		●		
MIN/AVG		●	●	
Display Backlight		●		
LBD	Low Battery Display	●		
General				
Power supply	2x1.5V AAA Batteries			
Product Size	143mmx99mmx47mm/5.6"x3.9"x1.85"			
Product Weight	135g/0.3lb			
The Defalt Temperature	(°C)Centigrade/(°F)Fahrenheit			
Certificate	CE/ETL/RoHS/FDA			

Accessories Included
Battery and User's manual

MASTECH®



MS6530T MS6541

NON-CONTACT INFRARED THERMOMETER



MS6541

- Accessories Included
- K type thermocouple (MS6541)
- Carry Bag
- Battery and User's manual



IRT TEMP -20°C~350°C
-4°F~662°F

Specifications	Range	MS6530T MS6541	
		Accuracy	
IRT Temperature	-20~10°C/ -4~50°F	±3°C/ ±5.4°F	
	10~30°C/ 50~86°F	±1°C/ ±1.8°F	
	30~350°C	±(1.5%+2°C)	
	86~662°F	±(1.5%+3.6°F)	
	-50~0°C/ -58°F~32°F		±4°C/ ±7.2°F
	0°C~400°C		±(1.5%+2°C)
	32°F~752°F		±(1.5%+3.6°F)
	400°C~760°C		±(2.0%+2°C)
K-T Temperature	752°F~1400°F		±(2.0%+3.6°F)
	-50°C~300°C		±(1.5%+3°C)
	-58°F~572°F		±(1.5%+5.4°F)
Ambient TEMP	-10~40°C	±(1.0%+2°C)	
	14~104°F	±(1.0%+4°F)	
Relative Humidity	10%~20%	±4.0%	
	20%~80%	±3.0%	
	80%~90%	±4.0%	
Resolution	<1000	0.1°C/0.1°F	
	>1000	1°C/1°F	
Repeatability		±0.1°C	
Emissivity		0.95/0.85/0.75	0.10~1.0
Optical Resolution		12:1	30:1
Features			
Data Logging	100 groups		•
Spectral Response	8~14µm	•	•
Thermal Bridge	green,red,yellow LED	•	
Model Warning	green,red,yellow LED	•	
Laser	<1mW / 630-670nm	•	•
°C/°F Selection		•	•
Response Time	<500ms	•	•
Relative Humidity	10%~90%	•	•
Laser Target Pointer		•	•
High/Low	Alarm Setting		•
APO	Auto Power Off	•	•
MAX/MIN/AVG/DIF			•
Reading Hold		•	•
Display Backlight		•	•
LBD	Low Battery Display	•	•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	MS6530T 194mm×162mm×56mm/7.6"×6.4"×2.2" MS6541 192mm×95mm×83mm/7.5"×3.7"×3.3"		
Product Weight	MS6530T 280g/0.6lb MS6541 275g/0.6lb		
The Default Temperature	(°C) Centigrade/(°F) Fahrenheit		
Certificate	CE/ETL/RoHS		

MS6531C MS6531A / MS6531B

NON-CONTACT INFRARED THERMOMETER

MASTECH®



IRT TEMP -40°C~800°C
-40°F~1472°F

K-T TEMP -40°C~1080°C
-40°F~1976°F

		MS6531A	MS6531B	MS6531C
Specifications	Range	Accuracy		
IRT Temperature	-60~0°C/-76~32°F	±4°C/ ±7.2°F		
	-40~0°C/-40~32°F		±4°C/ ±7.2°F	±4°C/ ±7.2°F
	0~400°C	±(1.5%+2°C)	±(1.5%+2°C)	±(1.5%+2°C)
	32~752°F	±(1.5%+3.6°F)	±(1.5%+3.6°F)	±(1.5%+3.6°F)
	400~500°C	±(2.0%+2°C)		
	752~932°F	±(2.0%+3.6°F)		
	400~800°C		±(2.0%+2°C)	±(2.0%+2°C)
	752~1472°F		±(2.0%+3.6°F)	±(2.0%+3.6°F)
K-Type Temperature	-40°C~1080°C	±(1.5%+3°C)		±(1.5%+3°C)
	-40°F~1976°F	±(1.5%+5.4°F)		±(1.5%+5.4°F)
Resolution	<199.9	0.1°C/0.1°F		
	>199.9	1°C/1°F		
Repeatability		±0.1°C		
Emissivity		0.10~1.00		
Optical Resolution		12:1		
Features				
Data Logging	20 groups			•
Color Display			•	
APO	Auto Power Off		•	
Spectral Response	8-14 μm		•	
Laser	<1mW / 630-670nm		•	
°C/°F Selection			•	
Response Time	0.5 second		•	
Relative Humidity	10%~90%		•	
Laser Target Pointer			•	
High/Low	Alarm Setting		•	
Reading Hold			•	
Lock selection			•	
MAX/MIN/AVG/DIF			•	
Display Backlight			•	
LBD	Low Battery Display		•	
General				
Power Supply	1×9V 6F22 Battery			
Product Size	176mm×132mm×49mm/6.9"×5.2"×1.9"			
Product Weight	223g/0.5lb			
The Defalt Temperature	(°C) Centigrade/(°F) Fahrenheit			
Certificate	CE/ETL/RoHS			

- Accessories Included
- K type thermocouple (MS6531A/MS6531C)
- Carry Bag
- Battery and User's manual

MS6508

TEMPERATURE HUMIDITY METER



AMBIENT TEMP	-20°C~60°C -4°F~140°F	WET BULB TEMP	-20°C~60°C -4°F~140°F
DEW POINT TEMP	-50°C~60°C -58°F~140°F	HUMIDITY	0%~100%RH

MS6508		
Specifications	Range	Accuracy
Ambient Temperature	-20°C~0°C/-4°F~32°F	±1°C/±1.8°F
	0°C~45°C/32°F~113°F	±0.5°C/±0.9°F
	45°C~60°C/113°F~140°F	±1°C/±1.8°F
Wet Bulb Temperature	-20°C~0°C/-4°F~32°F	±1.5°C/±2.7°F
	0°C~45°C/32°F~113°F	±1°C/±1.8°F
	45°C~60°C/113°F~140°F	±1.5°C/±2.7°F
Dew Point Temperture	-50°C~0°C/-58°F~32°F	±1.5°C/±2.7°F
	0°C~45°C/32°F~113°F	±1°C/±1.8°F
	45°C~60°C/113°F~140°F	±1.5°C/±2.7°F
Relative Humidity	0%~10%	±4.0%RH
	10%~90%	±3.0%RH
	90%~100%	±4.0%RH
Resolution	0.1°C/ 0.1°F/ 0.1%RH	
Features		
Updated Rate		400ms
Data Logging	Data Logging and Recall	100
°C/°F Selection		●
MAX/MIN		●
Data Hold		●
Display Backlight		●
LBD	Low Battery Display	●
General		
Power Supply	4×1.5V AAA Batteries	
Product Size	184mm×60mm×29mm/7.2"×2.4"×1.1"	
Product Weight	154g/0.34lb	
Certificate	CE/ETL/RoHS	

Accessories Included
Carry Bag
Battery and User's manual



MS6505

MS6503

DIGITAL THERMO-HYGROMETER



TEMPERATURE	-20°C~60°C -4°F~140°F
-------------	--------------------------

MS6503 MS6505		
Specifications	Range	Accuracy
Temperature	-20°C~60°C	±0.7°C
	-4°F~140°F	±1.4°F
Relative Humidity	0~100%	±2.5% RH
Resolution	Temperature	0.1°C/°F
	Humidity	0.1%RH
Response Time	Humidity	75 Sec
	Temperature	40 Sec
Features		
Display	4 Digital Liquid Crystal Display	2000
APO	Auto Power Off	•
MAX/MIN		•
Clock		•
Data logging	16300 groups	•
Data Hold		•
Interface	RS-232	•
Display Backlight		•
General		
Power Supply	1×9V 6F22 Battery	
Product Size	183mm×74mm×42mm/7.3"×2.9"×1.6"	
Product Weight	330g/0.7lb	
Certificate	RoHS	

Accessories Included
RS232 Date Line
Software CD
Carry bag
AC adapter
Battery and User's manual



MS6512

MS6511

DIGITAL THERMOMETER



TYPE K, J, T, E

CHANNEL T1/T2/T1-T2

		MS6511	MS6512
Specifications	Range		Accuracy
Thermocouple Type	K	-200~1372°C/-328~2501°F	Above -10°C: ±(0.5% + 0.5°C)
	J	-210~1200°C/-346~2192°F	Between -10°C~ -200°C: ±(0.5% + 1°C)
	T	-250~400°C/-418~752°F	Below -200°C: ±(0.5% + 1.5°C)
	E	-150~1000°C/-238~1832°F	T-type < -200°C for reference only
Resolution	<1000		0.1°C/ 0.1°F/ 0.1k
	>1000		1°C/ 1°F/ 1k
Features			
Injection Method			SingleDual
Channel			TC T1/ T2/ T1-T2
APO	Auto Power Off		•
Data Hold			•
MAX/MIN/AVG			•
LBD	Low Battery Display		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	190mm×89mm×42mm/7.5"×3.5"×1.7"		
Product Weight	350g/0.8lb		
Certifictae	CE/ETL/RoHS		

Accessories Included

- K type thermocouple
- Battery and User's manual

MS6514

MS6513

DIGITAL THERMOMETER

MASTECH®



TYPE K, J, T, E, R, S, N

CHANNEL T1/T2/T1-T2

		MS6513	MS6514	
Specifications	Range		Accuracy	
Thermocouple Type	K	-200~1372°C/-328~2501°F	K.J.T.E.N type	
	J	-210~1200°C/-346~2192°F	Above -10°C: ±(0.2% + 0.5°C)	
	T	-250~400°C/-418~752°F	Between -10°C~ -200°C: ±(0.2% + 1°C)	
	E	-150~1000°C/-238~1832°F	Below -200°C: ±(0.2% + 1.5°C)	
	R	0~1767°C/-32~3212°F	T-type < -200°C for reference only	
	S	0~1767°C/-32~3212°F		
	N	-200~1300°C/-328~2372°F	R.S type : ±(0.2% + 1°C)	
Resolution	<1000		0.1°C/ 0.1°F/ 0.1k	
	>1000		1°C/ 1°F/ 1k	
Features				
Injection Method			Single	Dual
Channel			TC	T1/ T2 /T1-T2
APO	Auto Power Off		●	
Data Logging	groups		1000	
Data Hold			●	
MAX/MIN/AVG			●	
MEM	Save current data		●	
USB Interface			●	
LBD	Low Battery Display		●	
General				
Power Supply	1×9V 6F22 Battery			
Product Size	190mm×89mm×42mm/7.5"×3.5"×1.7"			
Product Weight	350g/0.8lb			
Certificate	CE/ETL/RoHS			

Accessories Included

- K type thermocouple
- USB interface cable
- Software CD
- Battery and User's manual



CENTIGRAGE -50°C~750°C

FAHRENHEIT -58°F~1382°F

		MS6500	MS6501
Specifications	Range	Accuracy	
Celcius scale	-50~-40°C	±6°C	±6°C
	-39.9~-20°C	±5°C	±3°C
	-19.9~0°C	±3°C	±2°C
	0~500°C	±(0.75%+2°C)	
	500~750°C	±(1%+3°C)	
	0~99.9°C		±1°C
	100~119.9°C		±3°C
	120~150°C		±5°C
Fahrebheit scale	-58~4°F	±7°F	±8°F
	-3~32°F	±4°F	±4°F
	33~932°F	±(0.75%+4°F)	
	932~1382°F	±(1%+5°F)	
	33~212°F		±2°F
	213~302°F		±4°F
Resolution	°C/°F	0.1	0.1
Features			
Sample Rate		500mS	
Display	counts	2000	
Data Hold		●	
Input	K-Type Termocouples	●	
LBD	Low Battery Display	●	
General			
Power Supply	1×9V 6F22 Battery		
Product Size	125.5mm×72mm×27mm/5.6"×2.8"×1.0"		
Product Weight	145g/0.30lb		
Certificate	RoHS		

Accessories Included

- K type thermocouple
- Carry Bag
- Battery and User's manual



Environment Lux Meters

MS6610

DIGITAL LIGHT METER [LUX]



LUX RANGE 50,000

MS6100			
Specifications	Range	Resolution	Accuracy
Measurement Range	0~1999 Lux	1 Lux	±(5%+2)
	2000~19990 Lux	10 Lux	±(5%+2)
	20000~50000 Lux	100 Lux	±(5%+2)
Features			
Display	counts		2000
Data Hold			•
Photo Detector	One Silicon Photo Diode with Filter		•
Lead Length	150cm (Approx)		•
LBI	Low Battery Indicator		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	126mm×72mm×27mm/5.0"×2.8"×1.0"		
Photo Detector Size	83mm×52mm×21mm/3.2"×2.0"×0.8"		
Product Weight	180g/0.4lb		
Certificate	CE/ETL/RoHS		

- Accessories Included
- Battery and User's manual



MS6612T

MS6612 / MS6612D

DIGITAL LIGHTMETER [LUX/FC/CD]



CD RANGE 999,900 LUX RANGE 200,000

FC RANGE 20,000

MS6612 MS6612T MS6612D			
Specifications	Range	Resolution	Accuracy
Measurement Range	0~200000 Lux	0.01 Lux	±(3%+2)
	0~20000 FC	0.01 FC	±(3%+2)
	0~999900 CD	0.01 CD	±(3%+2) ±(3%+2)
Light Source Default Values	L0-Standard Lighting		• •
	L1-LED Daytime Light		• •
	L2-LED Red Light		• •
	L3-LED Amber (yellow) Light		• •
	L4-LED Green Light		• •
	L5-LED Blue Light		• •
	L6-LED Purple Light		• •
	L7-L9-Default Standard Lighting		• •
Features			
Display	Counts		2000
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
MAX / MIN			•
REL	Relative Measurement		•
PEAK	Peak Measurement		•
ZERO	Zero Calibration		•
FC / Lux	FC / Lux / Unit Selection		•
Data Hold			•
Analog Bar	Analog Bar Indication		•
LBD	Low Battery Display		•
CD	CD Unit Selection		• •
Wireless	APP connection		•
General			
Power Supply	1×9V 6F22 Battery		
Product Size	170mm×89mm×43mm/6.7"×3.5"×1.7"		
Product Weight	420g/0.93lb		
Certificate	CE/ETL/RoHS		

MASTECH®



- Accessories Included
- Carry bag
Battery and User's manual



MS6208A

MS6208B

DIGITAL TACHOMETERS



MS6208B



RANGE (contact) 50~19,999 RPM

RANGE (non-contact) 50~99,999 RPM

		MS6208A		MS6208B	
Specifications	Range	Resolution	Accuracy		
Measurement	50~99.99 RPM	0.01 RPM	±(0.03%+2)		±(0.03%+2)
	100~9999.9 RPM	0.1 RPM	±(0.03%+2)		±(0.03%+2)
	10000~19999 RPM	1 RPM	±(0.03%+2)		
	10000~99999 RPM	1 RPM			±(0.03%+2)
Features					
Measuring Mode			Contact		Non-Contact
Measuring Distance	50mm~250mm				●
Idler wheel selection	6", 12", 0.1m		●		
Unit Selection	m/min, m/sec, ft/min, ft/sec, in/min		●		
APO	Auto Power Off				●
MAX/MIN					●
Data Logging	100 groups				●
Data Hold					●
Display Backlight					●
LBD	Low Battery Display				●
General					
Power Supply	4×1.5AAA Batteries				
Model	MS6208A		MS6208B		
Product Size	170mm×60mm×27mm/6.7"×2.4"×1.1"		155mm×60mm×27mm/6.1"×2.4"×1.1"		
Product Weight	130g/0.28lb		120g/0.26lb		
Certificate	CE/ETL/RoHS				

Accessories Included	
Measurement idler wheels, touch tips and lengthening bar (MS6208A)	
Reflective sheeting (MS6208B)	
Carry bag	
Battery and User's manual	

MS6252B

MS6252A / MS6252D

DIGITAL ANEMOMETER



CFM 999.9
9.999ft²

CMM 999.9
9.999m²

CMS 99.99
9.999m²

		MS6252A		MS6252B	MS6252D
Specifications	Range	Resolution	Accuracy		
m/s(meter per second)	0.80~30.00 m/s	0.01 m/s	±(2.0%+50)		
	30.00~40.00 m/s	0.01 m/s	Reference		
km/h(kilometer per hour)	2.88~108.0 km/h	0.01 km/h	±(2.0%+50)		
	108.0~144.0km/h	0.1 km/h	Reference		
ft/s(feet per second)	2.62~98.50ft/s	0.01 ft/s	±(2.0%+50)		
	98.5~131.2ft/s	0.01 ft/s	Reference		
Knots(nautical miles per hour)	1.6~58.30knots	0.01 knots	±(2.0%+50)		
	58.30~77.70knots	0.01 knots	Reference		
mile/h(mile per hour)	1.8~67.20mil/h	0.01 mil/h	±(2.0%+5)		
	67.20~90.00mil/h	0.01 mil/h	Reference		
ft/m(feet per minute)	157.5~5900ft/m	1 ft/m	±(2.0%+5)		
	5900~7874ft/m	1 ft/m	Reference		
Temperature	-10°C~60°C	0.1°C		±1.5°C	±1.5°C
	14~140°F	0.1°F		±2.7°F	±2.7°F
Relative Humidity	(20~80%)RH	0.1%RH		±3.0%	±3.0%
	(<20 or >80%)RH	0.1%RH		±5.0%	±5.0%
Features					
Air Volume Unit	Range	Area			
	CFM: 0~999.9	0~9.999 ft²	•		
	CMM: 0~999.9	0~9.999 m²	•		
	CMS: 0~99.99	0~9.999 m²	•		
Display	counts		9999		
APO	Auto Power Off		•		
Flow Area Setting			•		
MAX / MIN			•		
Data Hold			•		
Display Backlight			•		
LBD	Low Battery Display		•		
°C/°F Selection			•	•	•
Ambient			•	•	•
Dew Point			•	•	•
Wet Bulb			•	•	•
Temperature			•	•	•
USB Interface	(Windows OS)		•		
Wireless	APP connection				•
General					
Power Supply	1×9V 6F22 Battery				
Product Size	165mm×85mm×38mm/6.5"×3.3"×1.5"				
Product Weight	168g/0.37lb				
Certificate	CE/ETL/RoHS				

MASTECH®



Accessories Included
USB interface cable (MS6252B)
Software CD (MS6252B)
Carry bag
Battery and User's manual



MS6414

MS6416 / MS6418 / MS64100 / MS6404 / MS6406 / MS6408

LASER DISTANCE METER



MS6404



DISTANCE 0.05m~40m

	MS6414	MS6416	MS6418	MS64100	MS6404	MS6406	MS6408
Specifications	Range						
Distance	40M	60M	80M	100M	40M	60M	80M
Accuracy	±1.5mm				±2.0mm		
Unit	m/inch/ft				m/inch/ft		
Features							
Measurement	Full mode - Pythagorean proposition measurement function						
Continuous	Continuous measurement						
Area/Volume	Area & volume calculation						
Add and subtract	Add and subtract measurement function						
Foot level	Auxiliary foot level measurement						
MIN/MAX	MIN and MAX measurement						
Backlight	Display backlight						
Laser	Assisted laser measurement						
Laser type	Class II, 635nm, <1mW						
Automatically cut off laser	20s						
Automatic shutdown	150s						
Data Logging	99 groups				30 groups		
General							
Power Supply	3×1.5V AAA Batteries				2×1.5V AAA Batteries		
Product Weight	175g/0.4lb				120g/0.26lb		
Product Size	120mm×60mm×28mm				112mm×50mm×25mm		
Certification	CE/ETL/FDA/RoHS						

Accessories Included
Portable bag
Battery and User's manual



MS6900A

MS6900

MOISTURE TESTER



RESOLUTION 0.1%, 0.1°C, 0.1°F
0.1%RH

DEPTH 0~50mm

		MS6900	MS6900A
Specifications	Range	Resolution	Accuracy
Material Moisture	0.0~60.0%	0.1%	±2.0%
Ambient TEMP	-10°C~50°C/14°F~122°F	0.1°C/0.1°F	±2°C/±3.6°F
Relative Humidity	10~90%	0.1%RH	±5.0%RH
Features			
Auxiliary	Verification Test Points		•
Depth	0~50mm		•
MAX/MIN			•
Sampling Rate	240mS		•
Unit Selection	%, WB, TD, °C, °F, %RH		•
Display Backlight			•
Data Hold			•
LBD	Low Battery Display		•
Materials Moisture Range			
1: (8.5~60%)	Beech, Spruce, Larch, Birch, Cherry, Walnut		
2: (6.8~53.4%)	Oak, Cedar, Maple, Ash Tree, Pink Shower Tree, Tamarisk		
3: (0.9~24.5%)	Smoothing Cement, Concrete		
4: (0.0~12.2%)	Anhydrite Screed		
5: (0.7~9.2%)	Cement Mortar		
6: (0.5~11.1%)	Lime Mortar, Plaster		
7: (0.0~17.8%)	Brick		
General			
Power Supply	2×1.5V AAA Batteries		
Product Size	130mm×56mm×29mm/5.1"×2.2"×1.1"		
Product Weight	120g/0.26lb		
Certificate	CE/ETL/RoHS		

• Verification Test Point



Accessories Included
Carry bag
Battery and User's manual



MS6708

DIGITAL SOUND LEVEL METER



SOUND LEVEL 30dB~130dB

FREQUENCY 31.5Hz~8KHz

- Accessories Included
- Windscreen
 - Carry Bag
 - Battery and User's manual



MS6708			
Specifications	Range	Resolution	Accuracy
Sound Pressure	30dB~80dB	0.1dB	±1.5dB
	40dB~90dB	0.1dB	±1.5dB
	50dB~100dB	0.1dB	±1.5dB
	60dB~110dB	0.1dB	±1.5dB
	70dB~120dB	0.1dB	±1.5dB
	80dB~130dB	0.1dB	±1.5dB
Features			
Display	counts		2000
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
Dynamic	50dB		•
Frequency	30Hz~8kHz		•
Sample Rate	2 times/second		•
Fast/Slow	125ms/1 sec		•
A/C Weighting			•
B.L.	Display Backlight		•
LBD	Low Battery Display		•
Analog Bar	Analog Bar Indication		•
UNDER/OVER	Over Range Indication		•
MAX			•
Data Hold			•
General			
Power Supply	4×1.5V AAA Batteries		
Product Size	193mm×60mm×29mm/7.6"×2.4"×1.1"		
Product Weight	222g/0.48lb		
Certificate	CE/ETL/RoHS		

MS6701

MS6700 / MS6702

DIGITAL SOUND LEVEL METER



SOUND LEVEL 30dB~130dB

FREQUENCY 31.5Hz~8KHz

MS6700 MS6701 MS6702			
Specifications	Range	Resolution	Accuracy
Sound Pressure	30dB~80dB	0.1dB	±1.5dB
	40dB~90dB	0.1dB	±1.5dB
	50dB~100dB	0.1dB	±1.5dB
	60dB~110dB	0.1dB	±1.5dB
	70dB~120dB	0.1dB	±1.5dB
	80dB~130dB	0.1dB	±1.5dB
Temperature	-20°C~10°C	0.1°C	±2.0°C
	10°C~60°C	0.1°C	±1.0°C
Relative Humidity	10%~90%	0.1%	±3.5%
Features			
Display	counts		2000
Auto Ranging	Auto & Manual		•
APO	Auto Power Off		•
Dynamic	50dB		•
Frequency	30Hz~8kHz		•
Sample Rate	2 times / second		•
Fast / Slow	125ms / 1 sec		•
A / C Weighting			•
B.L.	Display Backlight		•
LBD	Low Battery Display		•
Analog Bar	Analog Bar Indication		•
UNDER / OVER	Over Range Indication		•
MAX			•
Date and Time	Date and Time Display	•	•
AC Signal Output	0.707 Vrms at FS (Auto-range mode isn't included) Output impedance approx. 600Ω		•
DC Signal Output	10mV/dB Output impedance approx.100Ω		•
AC Adapter	Supply Voltage : 9VDC Supply Current >100m ADC External Diameter 3.5mm		•
RS-232 Pclink		•	
USB Interface		•	
Data Logging	records	16000	
°C/ °F Selection			•
General			
Power Supply	6×1.5V AAA Batteries		
Product Size	265mm×80mm×69mm/10.4"×3.15"×2.7"		
Product Weight	317g/0.7lb		
Certificate	CE/ETL/RoHS		

MASTECH®



- Accessories Included
- Windscreen
 - Earphone plug
 - RS232 interface cable (MS6701)
 - Software CD (MS6701)
 - Wapping case
 - Battery and User's manual



MS6310

COMBUSTIBLE GAS DETECTOR



RESOLUTION 50 ppm

ALARM 10%~40%

- Accessories Included
- Carry bag

Battery and User's manual

MS6310	
Specifications	
Resolution (methane)	50ppm
Alarm range	10%~40%
Warm Up Time	2 Minutes
Response time (40% LEL)	<2 Seconds
Features	
Easy to Identify and Pinpoint Gas Leaks	•
Portable and High Sensitivity	•
Resume Original Measurement State after 7~10 minutes in Clear Air	•
Gas Detected: Natural gas, Methane, Ethane, Propane, Butane, Acetone, Alcohol, Ammonia, Steam, Carbon Monoxide, Gasoline, Jet Fuel, Hydrogen Solvents, Lacquer thinner, Naphtha	•
General	
Power Supply	4×1.5V AA Batteries
Product Size	172mm×70mm×46mm/6.8"×2.8"×1.8"
Product Weight	354g/0.78lb
Certificate	CE/ETL/RoHS



MS6300

MULTI-FUNCTIONS ENVIRONMENT TESTER



TEMPERATURE -10~60°C 14~140°F HUMIDITY 20~80%RH SOUND LEVEL 30~130dB(A)

AIR FLOW 999,900 CMM/CFM WIND SPEED 0.5~20m/s ILLUMINANCE 0~50,000LUX

MS6300			
Specifications	Range	Resolution	Accuracy
Temperature	-10°C~60°C	0.1°C	±1.5°C
	14~140°F	0.1°F	±2.7°F
Relative Humidity	20%~80%RH	0.1%RH	±3.0%RH
	<20% or >80%RH	0.1%RH	±5.0%RH
Sound Level	30dB~130dB (A)	0.1dB	±1.5dB
	35~130dB (C)	0.1dB	±1.5dB
Illuminance	0~2000LUX	1LUX	±(5.0%+10)
	x10 (20000)	10LUX	±(5.0%+10)
Wind Speed	x100 (50000)	100LUX	±(5.0%+10)
	0.5~20m/s	0.1m/s	±(3.0%+10)
	1.8~72km/h	0.1km/h	±(3.0%+10)
	96~3942ft/min	1ft/min	±(3.0%+10)
Air Flow (CMM)	0.9~38.9knots	0.1knots	±(3.0%+10)
	0~999900CMM	0.1CMM (<1000CMM)	±(3.0%+10)
		1CMM (>1000CMM)	±(3.0%+10)
Air Flow (CFM)	0~999900CFM	0.1CFM (<1000CFM)	±(3.0%+10)
		1CFM (>1000CFM)	±(3.0%+10)
Features			
Auto Ranging	Auto & Manual		●
APO	Auto Power Off		●
Area range	0~999.9m² , 0~999.9ft²		●
Value	AVG/MAX/MIN/DIF (MAX-MIN)		●
A/C Weighting	Weighting Indication		●
Data Hold			●
B.L.	Display Backlight		●
LBD	Low Battery Display		●
General			
Power Supply	1×9V 6F22 Battery		
Product Size	280mm×89mm×50mm/11.0"×3.5"×2.0"		
Product Weight	433g/0.95lb		
Certificate	CE/ETL/RoHS		

MASTECH®



- Accessories Included
- Windbreak

Holder

Wrapping case

Battery and User's manual



MS2309

LOW RESISTANCE TESTER



- Accessories Included
- Test leads
 - Alligator clip
 - USB interface cable
 - Software CD
 - wrapping bag
 - Battery and User's manual



V AC 600V

R 4.0000Ω~400.00Ω

MS2309		
Specifications	Range	Accuracy
AC Voltage	600V (50/60Hz)	±(2.0%+5)
Resistance - 2-wire	4.0000Ω/40.000Ω/400.00Ω	±(0.5%+5)
Resistance - 4-wire	4.0000Ω/40.000Ω/400.00Ω	±(0.1%+5)
Resistance MIN Resolution	0.0001Ω	•
Features		
Display	counts	40000
Auto Ranging	Auto	•
APO	Auto Power Off	•
Measurement Rate	2 times/sec	•
Data storage	1000 groups	•
Clock	Real-time Display Clock, and with Clock the Measured Value While Storage	•
Real-Time Data Upload	PC, Read the Current Measured Value by Reading the Command	•
Input Protection	Self-Recovery Fuse or Fast-Break Fuse	•
Short-Circuit Current	>200mA	•
Data Compare		•
Data Hold		•
Backlight		•
Interface	USB	•
LBD	Low Battery Display	•
General		
Power Supply	8×1.5V AA Batteries	
Product Size	200mm×155mm×76mm/7.6"×5.9"×2.95"	
Product Weight	900g/1.98lb	
Certification	CE/ETL/RoHS	
Safety Rating	CAT III 600V	

MS5911

MS5911A / MS5911D

SAFETY PAT PLUS TESTER



V OUTPUT DC 250/500V

R 20MΩ

Function	Technical parameters	Range	Accuracy
Grounding performance	Test current >200mA (R<2Ω)	0Ω~19.99Ω	±5%+3
	Test voltage 5VDC, Test time 5S		
Insulation resistance	Test voltage 500VDC	0.2MΩ~19.99MΩ	±5%+3
	Test current> 1mA (R = 500kΩ)		
	Test time 5S	0.2MΩ~19.99MΩ	±5%+3
	Test voltage 250VDC		
	Test current> 1mA (R = 250kΩ)		
	Test time 5S		
Leakage current	Test voltage 50V rms / 50Hz	0.10mA~10.50mA	±5%+3
	Test time 5S		
Features			
APO	Auto power off		●
Data Logging	300 groups		●
Safety CLASS I	Grounding / Insulation resistance / Leakage current		●
Safety CLASS II	Insulation resistance / Leakage current		●
Cord test	Grounding / Insulation resistance / Leakage current		●
Polarity test			●
Power socket test			●
LBD	Low battery detection		●
Backlight			●
General			
Power Supply	DV12V or 8×1.5V AA Batteries		
Product Size	204mm×155mm×76mm/7.8"×6.1"×3"		
Product Weight	1270g/2.8lb		
Certificate	CE/RoHS		
Safety Rating	CAT II 300V		

- Accessories Included
- Main test cord
 - Alligator clip test cord
 - Probe
 - Rugged padded carrying case
 - Battery and user's manual
 - DC power adapter (optional)



MS922A

MS922D / MS922E

AC LINE SPLITTER



V

AC 250V

A

AC 15A

	MS922A	MS922D	MS922E
Specifications			
AC Voltage	125V	250V	250V
AC Current	15A	15A	15A
X1 current terminal		•	
X10 current terminal		•	
Features			
Allows for Easy AC Current Measurements		•	
Provides the Ability to Safely Measure Current		•	
Separates the Hot/Live Conductor from the Neutral and Ground		•	
Voltage check sockets for easy power calculations		•	
General			
Product Size	171mm×57mm×48mm/ 6.7"×2.2"×1.9"	•	
	200mm×57mm×48mm/ 7.8"×2.2"×2.9"	•	
	173mm×57mm×48mm/ 6.8"×2.2"×1.9"		•
Product Weight	131g/0.29lb	140g/0.3lb	131g/0.29lb
Certificate	ETL/RoHS	RoHS	RoHS
Safety Rating	CAT II 600V	CAT II 600V	CAT II 600V

Accessories Included

User's manual



MS922A



MS922D



MS922E



MASTECH®

BUILD TO PRECISION




Service • Innovation • Safety

TEST LEADS


T3008U / T3009U / T3016U / T3022 ...

T3008U

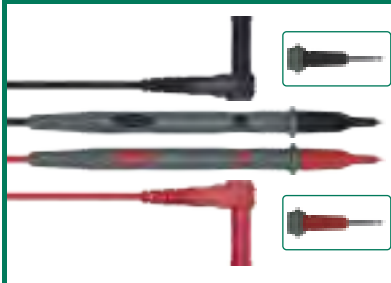


Probe Length: 146mm/ø9.2mm
Length: 1000mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/20AWG
MAX 10A

T3009U

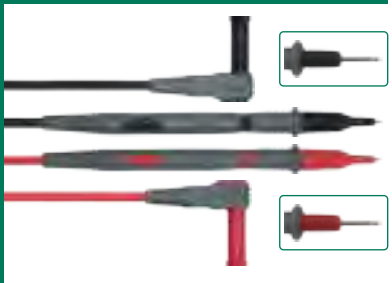

Probe Length: 146mm/ø10.2mm
Length: 1200mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

T3016U

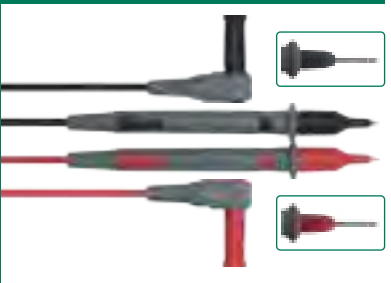


Probe Length: 120mm/ø9.5mm
Length: 1000mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/20AWG
MAX 10A

T3022




Straight Type & Right Angle Type
Length: 1000mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

T3030U

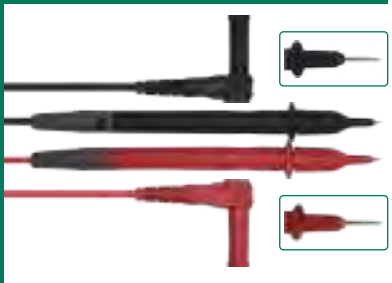

Probe Length: 143mm/ø10mm
Length: 1000mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

T3033U

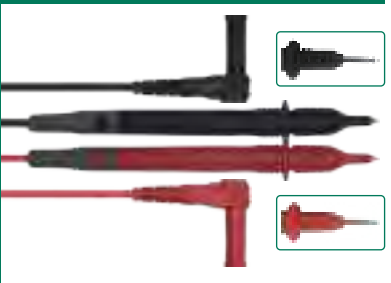


Probe Length: 119mm/ø9mm
Length: 800mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/20AWG
MAX 10A

T3060A



Probe Length: 132mm/ø10mm
Right Angle Type, M4 screw
Length: 1000mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

T3060B

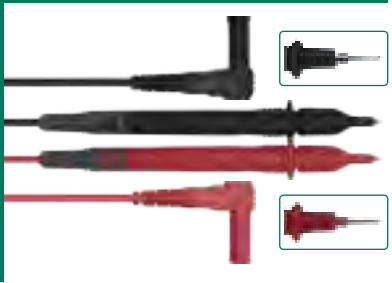

Probe Length: 132mm/ø10mm
Right Angle Type, M4 screw
Length: 1500mm
Tip: ø2mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

T3103




Straight Type
Length: 1340mm
Plug: ø4.5mm
Wire: UL 1803/18AWG
MAX 10A

K TYPE THERMOCOUPLE

P3400 / P3401 / P3408A / P3408B ...

P3400

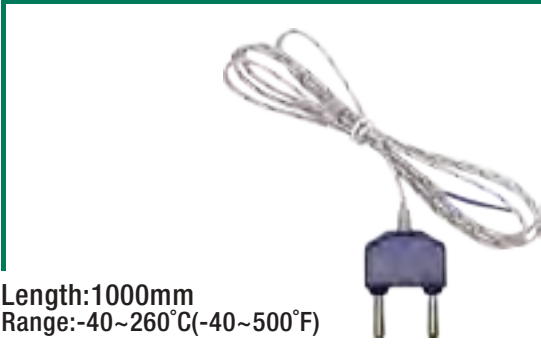


Length:1000mm
Range:-40~260°C(-40~500°F)

P3401



Length:1000mm
Range:-40~260°C(-40~500°F)

P3408A

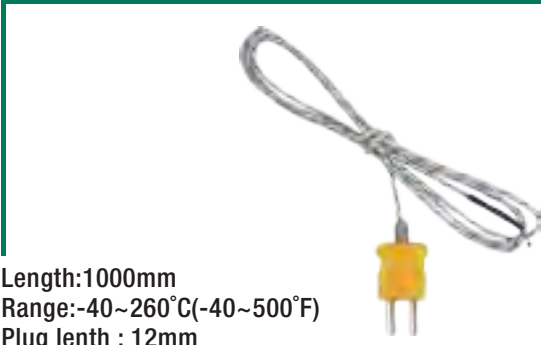

Length:1000mm
Range:-40~260°C(-40~500°F)
Plug length : 12mm

P3408B



Length:1000mm
Range:-40~260°C(-40~500°F)
Plug length : 16mm

P3409A



Length:1000mm
Range:-40~600°C(-40~1112°F)
Plug length : 12mm

P3409B



Length:1000mm
Range:-40~600°C(-40~1112°F)
Plug length : 16mm

P3410



Length:1000mm
Range:-40~600°C(-40~1112°F)

P3412



Length:1000mm
Range:-40~260°C(-40~500°F)

CLIP & THERMOCOUPLE ADAPTER

C3104 / C3105 / C3106 / C3107

C3104 Alligator Clip



Length: 61.5mm
with M4 screw

C3105 Extra large alligator clip



Length: 99mm
ø4mm cross plug

C3106 Medium Alligator Clip



Length: 87mm
ø4mm cross plug
Max 10A

C3107 Big Mouth Alligator Clip



Length: 87mm
ø4mm cross plug
Max 32A

C3109A Alligator Clip



Length: 61.5mm
with M4 screw

C3109B Medium Alligator Clip




Length: 55mm
with M4 screw

C3112 IC Test Clip



Length: 185mm
Plug: ø4mm Jack
Max 5A

C3113 Clip cord

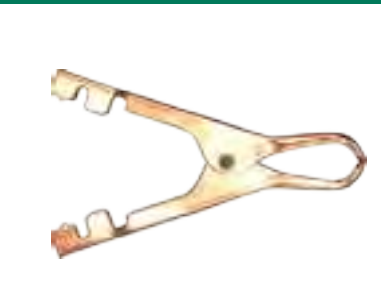

Length: 1530mm
ø4.5mm cross plug
UL1803 18AWG

C3116 LCR clip



Length: 92mm

MS3204 Thermocouple Adapter



k Type
Cx Type
Lx Type
hFE Type

MS3206 Thermocouple Adapter



k Type
Cx Type
hFE Type

MS3209 Thermocouple Adapter



k Type

DATA LINE & FUSE

R3403 / R3405 / R3415 / R3416 / R3417

R3403 Data Line



Length:1000mm

R3405 Data Line



Length:1000mm

R3407 Data Line



Length:1000mm

R3415 Data Line



Length:1000mm

R3416 Data Line



Length:1000mm

R3417 Data Line



Length:1000mm

F3925 Fuse



ø5×20mm

F 250mA, 250V -VDE
F 400mA/10A, 250V -TUV

F3930A Fuse



ø5.5×21mm

F 250mA/400mA, 300V -UL

F3930B Fuse



ø6×32mm

F 10A, 300V -UL

F3900A Fuse



ø6.3×32mm

FF 250mA/400mA/600mA , H 1000V -TUV
FF 250mA/400mA/600mA, H 1000V -UL

F3900B Fuse



ø10×38mm

FF 250mA/400mA/630mA/10A, 1000V -UL

F3960 Fuse



ø6.3×32mm

FF 200mA/250mA/10A, H 600V -TUV
FF 250mA/400mA/600mA/10A, H 600V -UL